

TUNDRA





TUNDRA

Inspired by the vast, serene landscapes of the tundra, TUNDRA bring the outdoors inside, creating a space that is both tranquil and invigorating.

TUNDRA are meticulously crafted to capture the subtle hues and textures found in the natural tundra environment. The palette ranges from soft, cool grays to earthy, warm browns, reflecting the changing seasons and moods of the tundra.

Each tile is a masterpiece in itself, featuring a unique blend of colors and patterns that mimic the organic, undulating surfaces found in nature.

They can be used in a multitude of settings, from residential bathrooms and kitchens to commercial spaces such as offices and retail stores. Their slip-resistant properties make them perfect for wet areas



TUNDRA

| Sliptech | Polished |

3 COLOURS



BEIGE




LIGHT




DARK

5 SIZES



120×60cm
48"× 24"

10mm
120×60cm 48"× 24"




60×60cm
24"× 24"

9mm
60×60cm 24"× 24"
60×30cm 24"× 12"
30×30cm 12"× 12"



60×30cm
24"× 12"



30×30cm
12"× 12"

20mm
60×40cm 24"× 16"

BULLNOSE



60×40cm
24"× 16"

2 FINISHES



▼ Sliptech

The soft-touch satin-finish surfaces are ideal for all interior applications as well as for new and surprising stylistic combinations.

▲ Polished

POLISHED lends elegance and style to floors and walls, allowing for enormous creativity in terms of installation patterns and colour combinations.



BEIGE




• Floor .
TUNDRA - BEIGE
SLIPTECH
60X120cm - 48"× 24"

LIGHT



- Wall / Floor .
TUNDRA - LIGHT
SLIPTECH
60X120cm - 48" x 24"

DARK

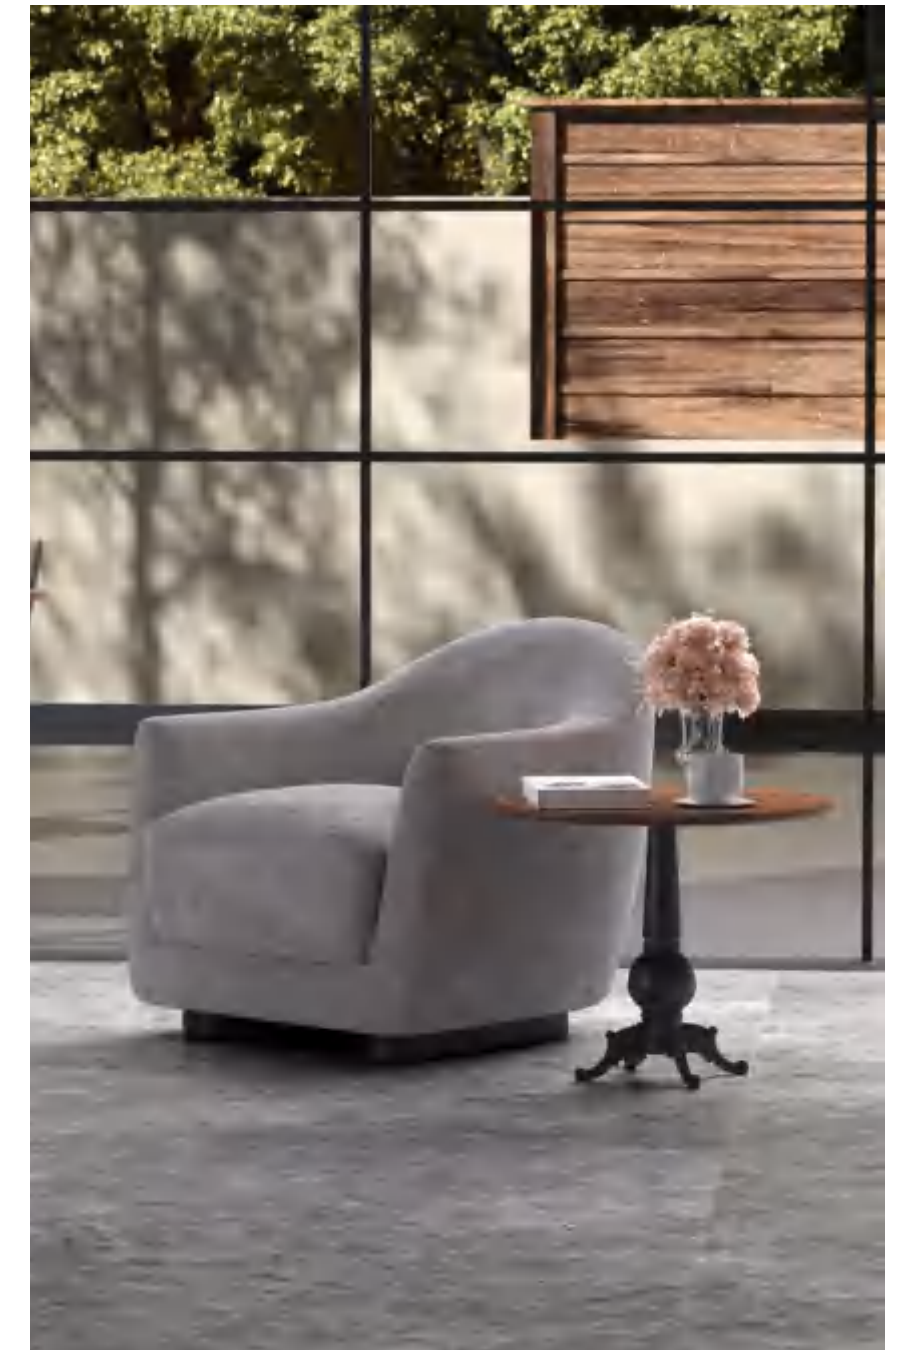

- Wall / Floor .
TUNDRA - DARK
SLIPTECH
60X120cm - 48"× 24"



The image displays three rectangular tiles arranged diagonally, overlapping each other. The top-left tile is a dark, mottled grey with a rough, stone-like texture. The middle tile is a light brown or tan color with a similar mottled texture. The bottom-right tile is a light grey or off-white color with a smoother, more uniform texture. The tiles are set against a plain white background, and a soft shadow is cast by the dark grey tile onto the surface below it.

BULLNOSE



• Wall / Floor .
TUNDRA - BULLNOSE
SLIPTECH
40X60cm - 16"× 24"



• TUNDRA - BULLNOSE



TUNDRA

BEIGE

PRODUCT INFORMATION

V3

✔

Sliptech

✔

Polished

▼

10MM

▲

120×60cm / 48"× 24"

12 faces

▼

9MM

▲

60×60cm/24"× 24"

24 faces

60×30cm/24"× 12"

48 faces

30×30cm/12"× 12"

96 faces

▼

20MM

▲

BULLNOSE

60×40cm/24"× 16"

24 faces



TUNDRA

LIGHT

PRODUCT INFORMATION

V3

✔

Sliptech

✔

Polished

▼

▲

10MM

120×60cm / 48"× 24"

12 faces

▼

▲

9MM

60×60cm/24"× 24"

24 faces

60×30cm/24"× 12"

48 faces

30×30cm/12"× 12"

96 faces

▼

▲

20MM

BULLNOSE

60×40cm/24"× 16"

24 faces



TUNDRA

DARK

PRODUCT INFORMATION

V3

✓

Sliptech

✓

Polished

▼

10MM

▲

120×60cm / 48"× 24"

12 faces

▼

9MM

▲

60×60cm/24"× 24"

24 faces

60×30cm/24"× 12"

48 faces

30×30cm/12"× 12"

96 faces

▼


20MM

▲

BULLNOSE

60×40cm/24"× 16"

24 faces

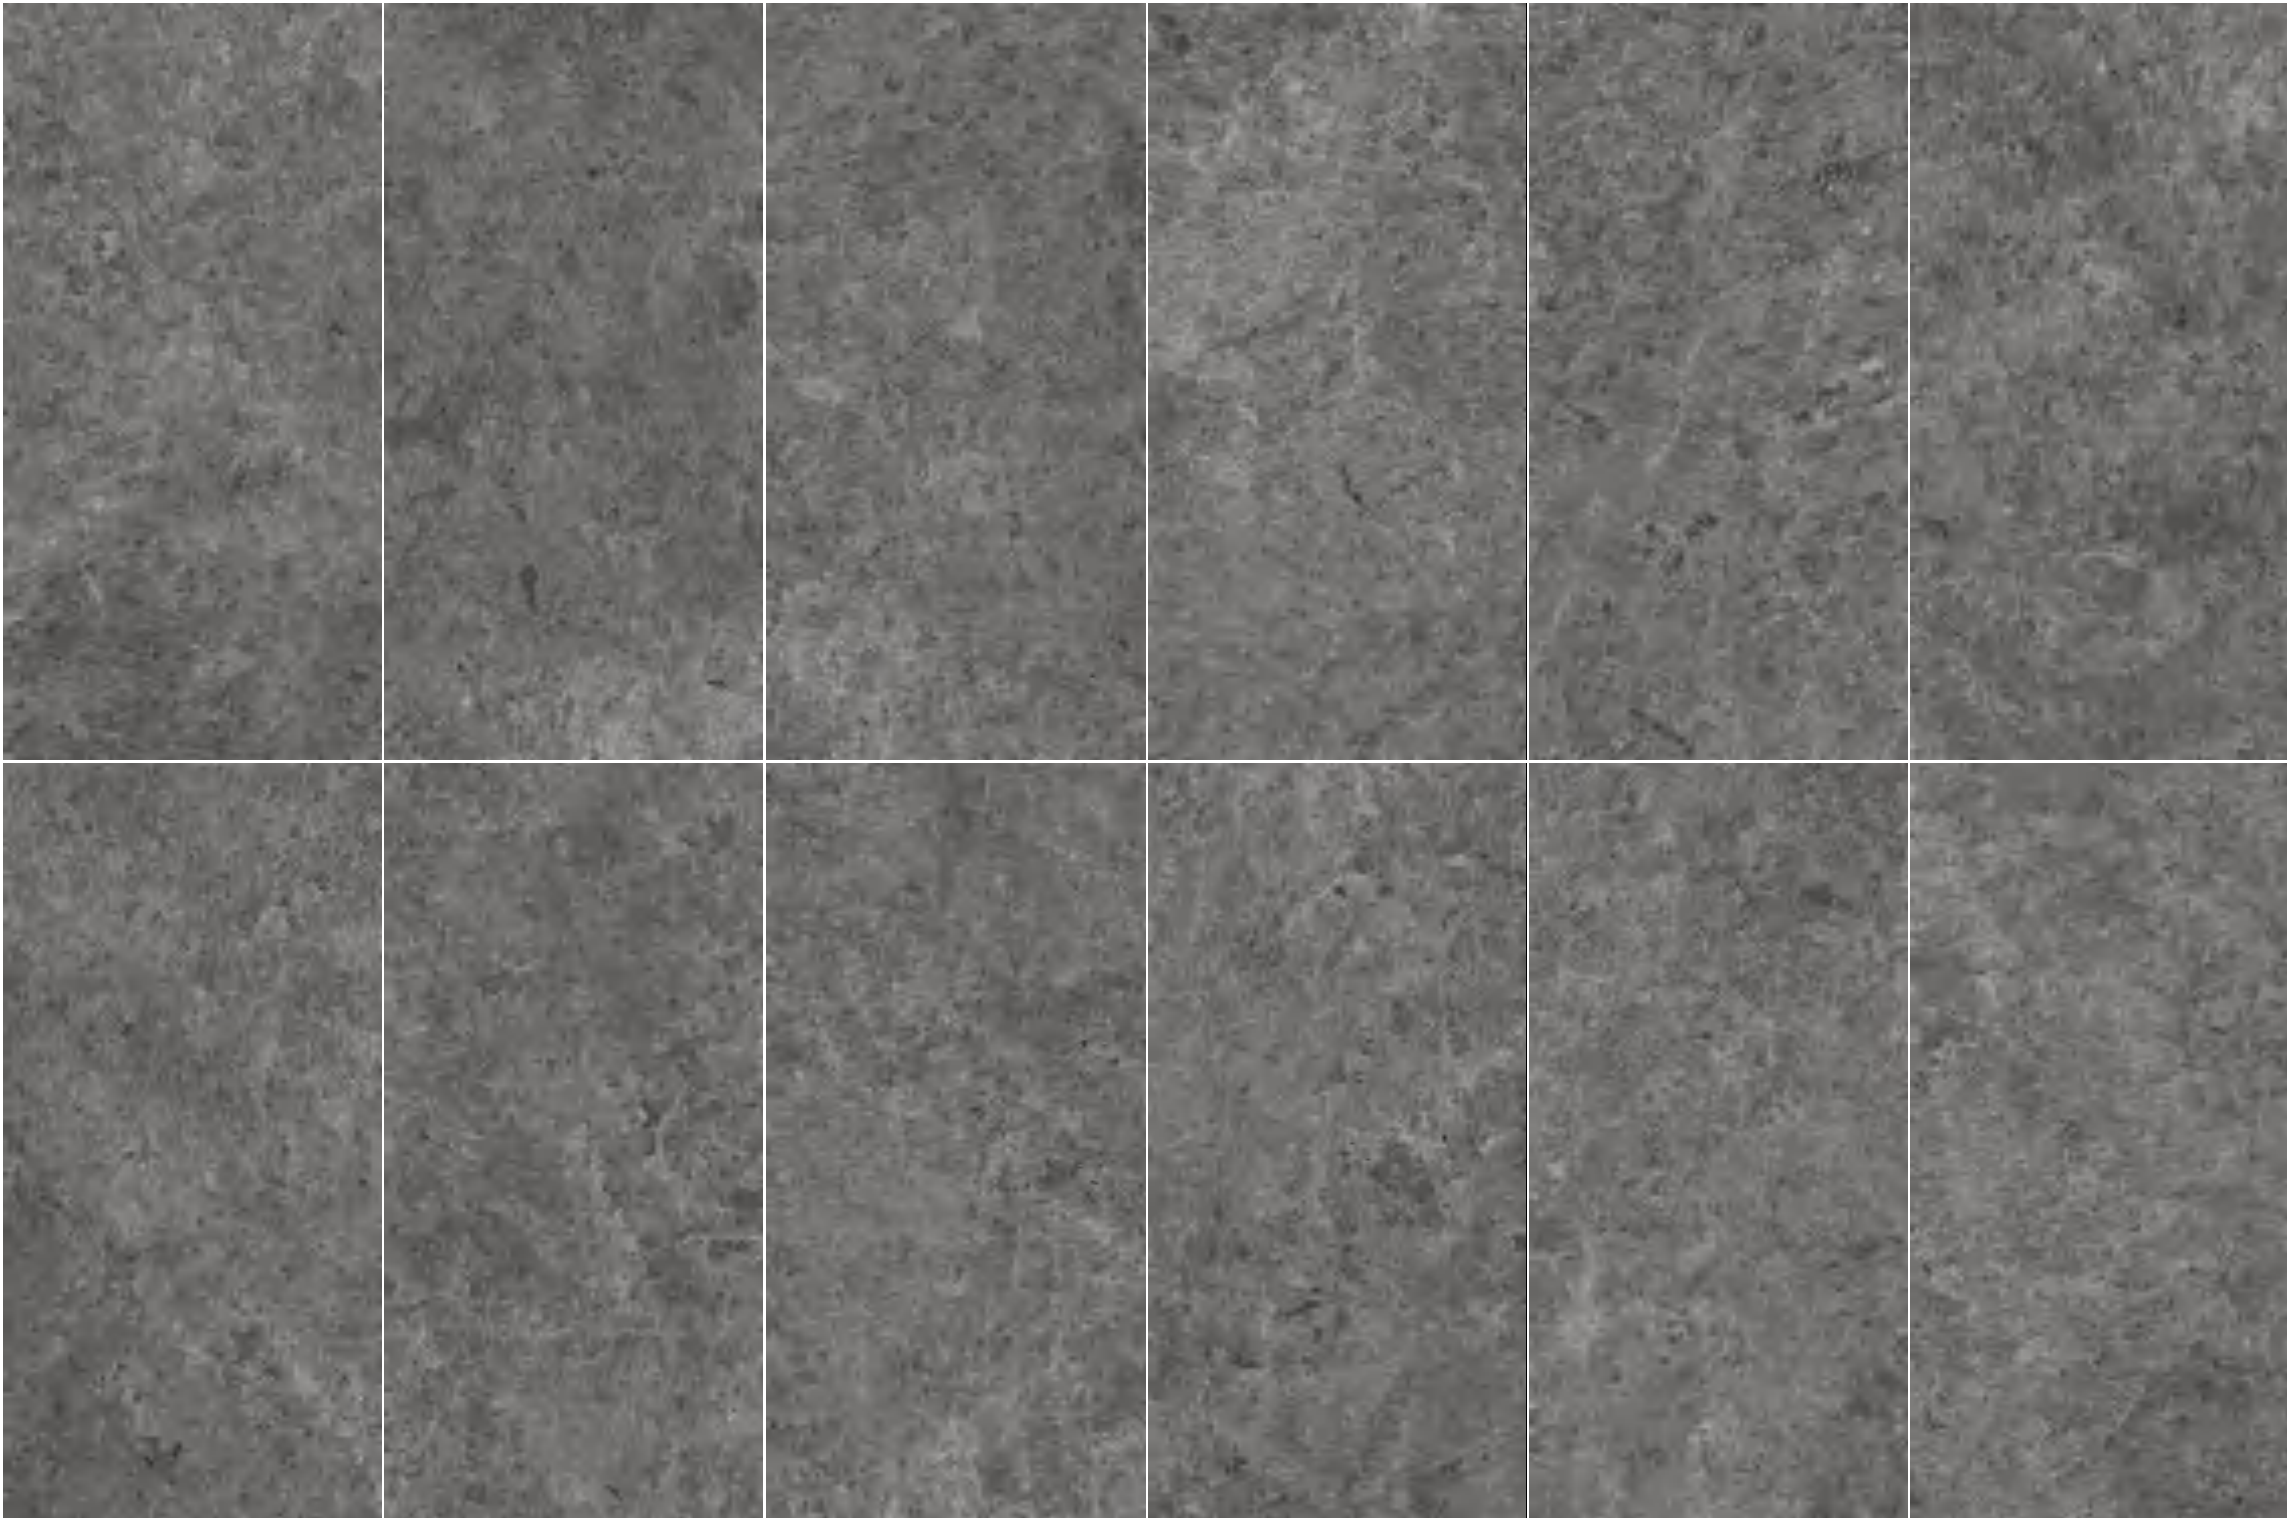


TECHNICAL SPECIFICATIONS


TECHNICAL CHARACTERISTIC	STANDARD TEST METHOD	ISO STANDARD REQUIREMENT	OUR VALUES
Length & Width	ISO 10545-2	±0.6%MAX	±0.30%Max
Thickness	ISO 10545-2	±5.0%MAX	±5.0%Max
Sides Straightness	ISO 10545-2	±5%MAX	±0.25%Max
Rectangularity	ISO 10545-2	±0.5%MAX	±0.25%Max
Flatness : a) Centre Curvature	ISO 10545-2	±0.5%MAX	±0.20%Max/Max2.0mm
b) Edge Curvature	ISO 10545-2	±0.5%MAX	±0.20%Max/Max2.0mm
c) Warpage	ISO 10545-2	±0.5%MAX	±0.20%Max/Max2.0mm
Surface Quality	ISO 10545-2	≥95%FREE <small>From visible defect</small>	Comply
Water Absorption	ISO 10545-3	≤0.5%	≤0.20%
Breaking Strength	ISO 10545-4	≥1300N	≥1300N
Modulus Of Rupture	ISO 10545-4	≥35N/mm ² <small>Individual ≥32N/mm²</small>	≥35N/mm ² <small>Individual ≥32N/mm²</small>
Abrasion Resistance			
a) Deep Abrasion For Unglazed Tiles	ISO 10545-6	≤175mm ³	≤160mm ³
b) Surfaces Abrasion For Glazed Tiles	ISO 10545-7	<small>Manuf.to state abrasion class, cycle and passed</small>	≥PEI 3 <small>(Dependent On Product Type)</small>
Crazing Test (glazed Tiles)	ISO 10545-11	No Sign Of Crazing	No Sign Of Crazing
Frost Resistance	ISO 10545-12	Required	No Visible Crack
Chemical Resistance			
a) low concentrations	ISO 10545-13	Manuf. to state	Class A
b) household chemicals and Swimming pool salts	ISO 10545-13	≥class B	Class B(For Polished Tiles) Class A Class B(For Polished Tiles)
Stain Resistance			
a) for unglazed tiles	ISO 10545-14	Manuf. to state	≥Class 3
b) for glazed tiles	ISO 10545-14	≥class 3	≥Class 3
Slip Resistance (Excluding Polished,Lappato And Satin Finishing)	AS/NZS 4586 App.A	Manuf. to state	Wet Pendulum≥P4 <small>(Dependent On Product Type)</small>

PACKING SPECIFICATIONS


SERIES	SIZES	PCS/CTN	m ² /CTN	KG/CTN	m ² /PLT	KG/PLT	CTN/PLT
TUNDRA	60x120/24”x48”	2	1.44	32	80.64	1792	56
	60x60/24”x24”	4	1.44	30	57.60	1200	40
	30x60/12”x24”	8	1.44	30	57.60	1200	40
	30x30/12”x12”	11	0.99	21	55.44	1176	56




UNIFORM
VARIATION
V1



SLIGHT
VARIATION
V2



MODERATE
VARIATION
V3



SUBSTANTIAL
VARIATION
V4



Foshan Casagres International Co, Ltd.
info@casagresintl.com
www.casagresintl.com