

ATOLL





ATOLL

ATOLL redefine spatial aesthetics by seamlessly blending form and function. Designed to elevate both residential and commercial interiors, our collection adapts effortlessly to diverse environments—from minimalist urban lofts to rustic retreats.

Modular sizes and curated layouts empower architects and designers to craft fluid, open-plan spaces or intimate, textured zones, while slip-resistant finishes ensure practicality for outdoor terraces and high-traffic areas.

Inspired by raw natural beauty and contemporary trends, ATOLL tiles embody understated sophistication.

Earth-toned palettes mimic weathered stone, driftwood, and desert sands, while geometric patterns and polished metallic accents cater to avant-garde projects.

Each tile's tactile surface and precision-cut edges create visual harmony, transforming floors, walls, and countertops into cohesive design statements.




ATOLL

| Matt |

5 COLOURS




BIANCO



WARM



PERLA



GRIGIO



NERO

3 SIZES



60×60cm
24"× 24"




60×30cm
24"× 12"



30×30cm
12"× 12"



BIANCO

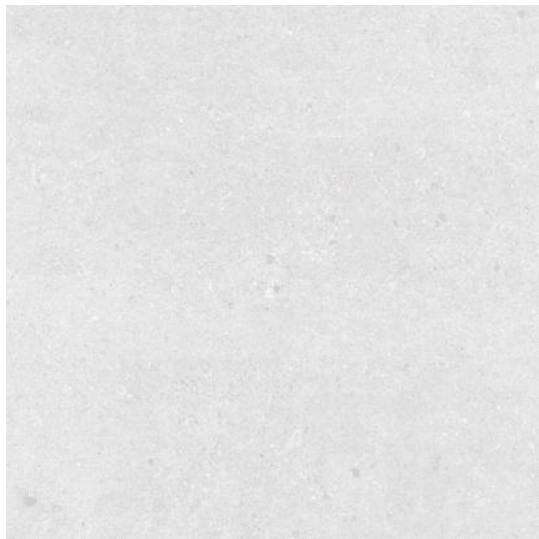

*Time folds into stone veins
each tile a frozen dialogue between
earth and eternity.*





• Wall .
ATOLL - BIANCO
MATT
60X60cm - 24" x 24"

• Floor .
ATOLL - NERO
MATT
60X60cm - 24" x 24"

WARM



*Tread on petrified symphonies
where geology composes, humanity curates*





- Floor / Wall .
ATOLL - WARM
MATT
60X60cm - 24"× 24"

PERLA



*A cartographer's dream
mapping the memory of ancient
quarries into modern sanctuaries*






- Floor .
ATOLL - PERLA
MATT
60X60cm - 24"× 24"



GRIGIO

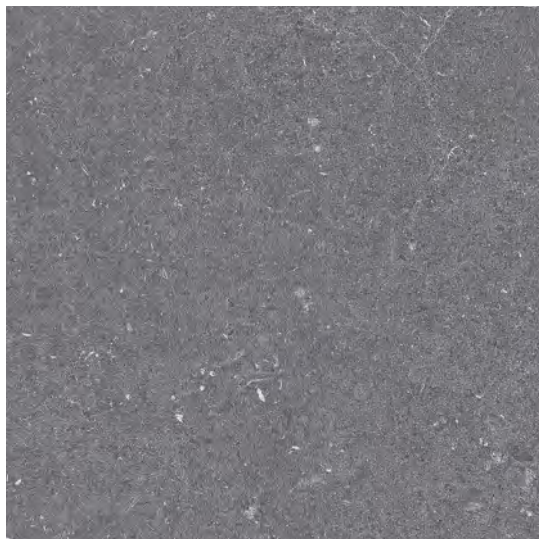

*Matte whispers
the quiet luxury of velvet-draped
moonlight underfoot*





• Floor .
ATOLL - GRIGIO
MATT
60X60cm - 24"× 24"

NERO



*Lustrous or subdued
Your floors become Rorschach tests
for architectural poetry*






• Floor .
ATOLL - NERO
MATT
60X60cm - 24" x 24"

ATOLL BIANCO

PRODUCT INFORMATION

▼
9MM
▲



60×60cm/24"× 24"
12 faces



60×30cm/24"× 12"
24 faces




30×30cm/12"× 12"
48 faces

- ✓ Matt
- ✓ Lappato




V2

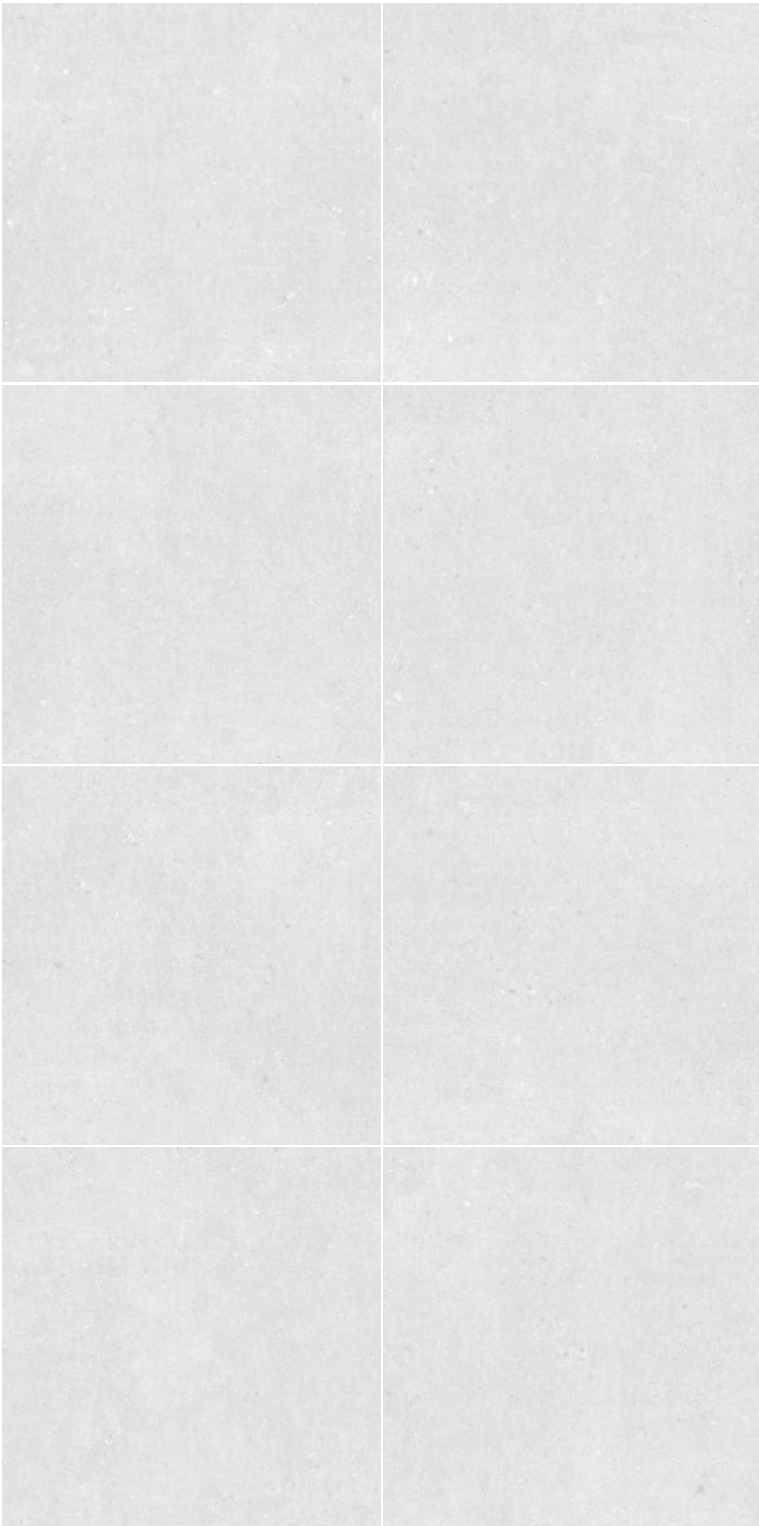

ATOLL WARM

PRODUCT INFORMATION

▼
9MM
▲



60×60cm/24"× 24"
12 faces



60×30cm/24"× 12"
24 faces




30×30cm/12"× 12"
48 faces

- ✓ Matt
- ✓ Lappato




V2

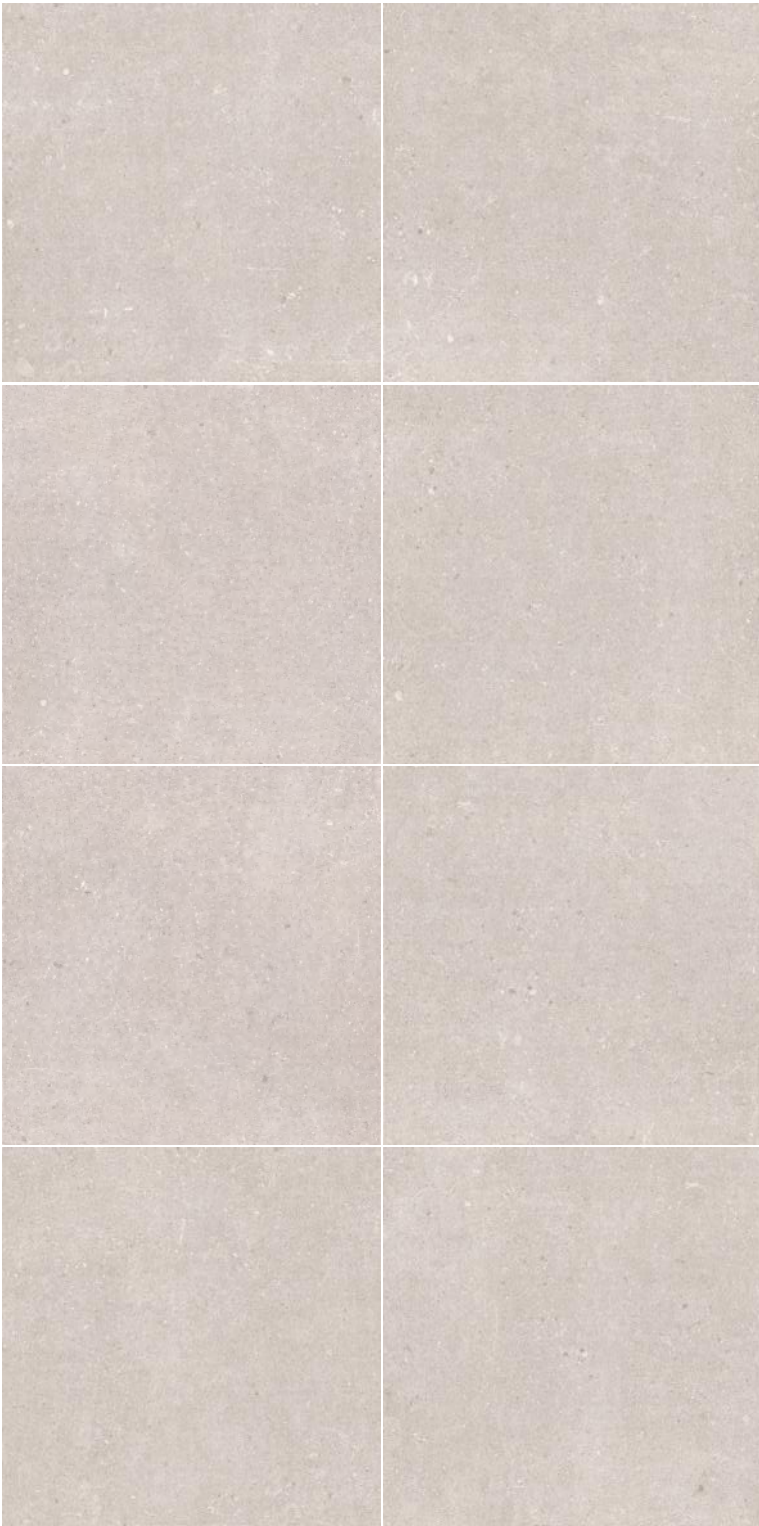

ATOLL

PERLA

PRODUCT INFORMATION



60×60cm/24"× 24"
12 faces



60×30cm/24"× 12"
24 faces




30×30cm/12"× 12"
48 faces

- ☒ Matt
- ☒ Lappato




V2

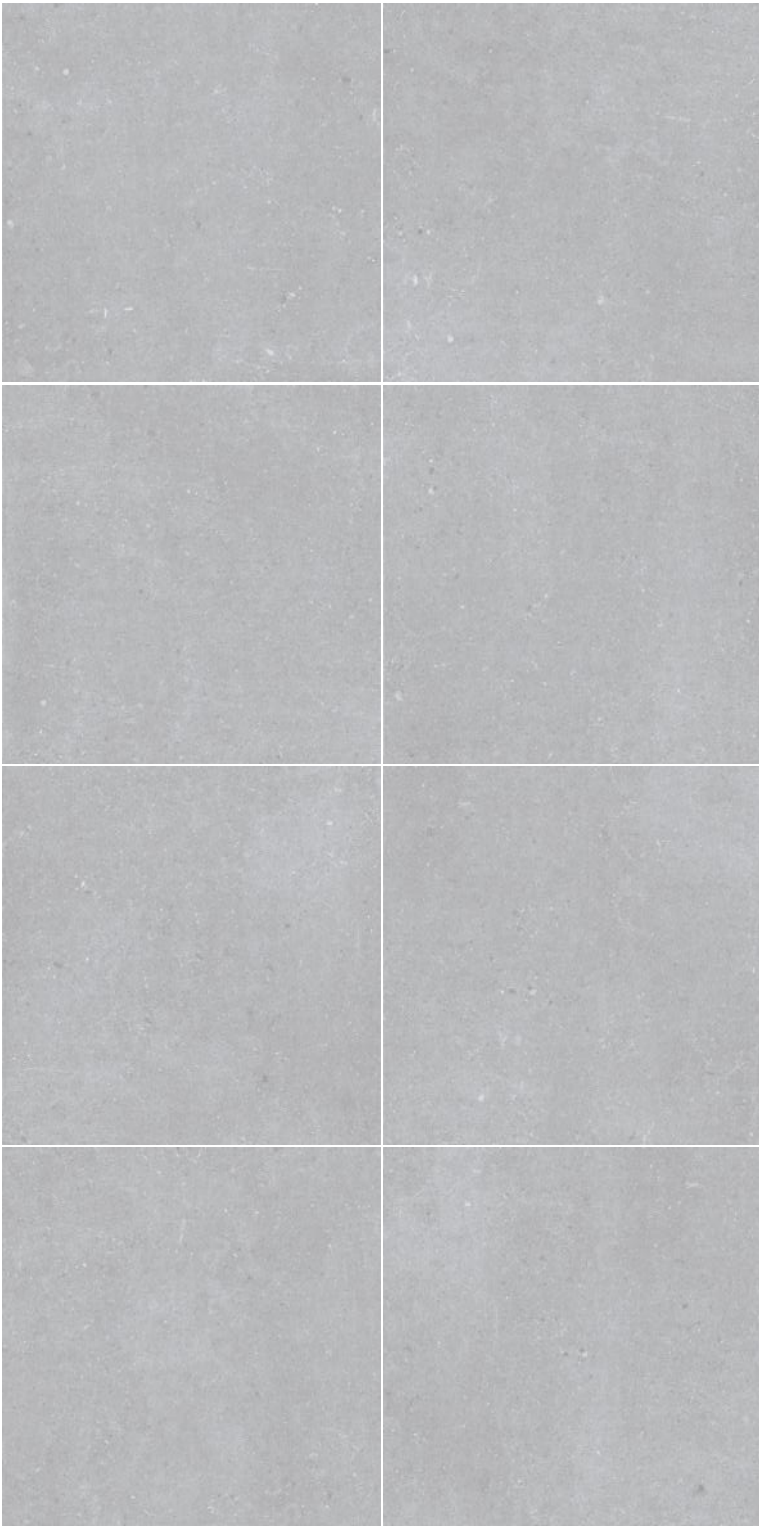

ATOLL

GRIGIO

PRODUCT INFORMATION



60×60cm/24"× 24"
12 faces



60×30cm/24"× 12"
24 faces




30×30cm/12"× 12"
48 faces

- ☒ Matt
- ☒ Lappato




V2

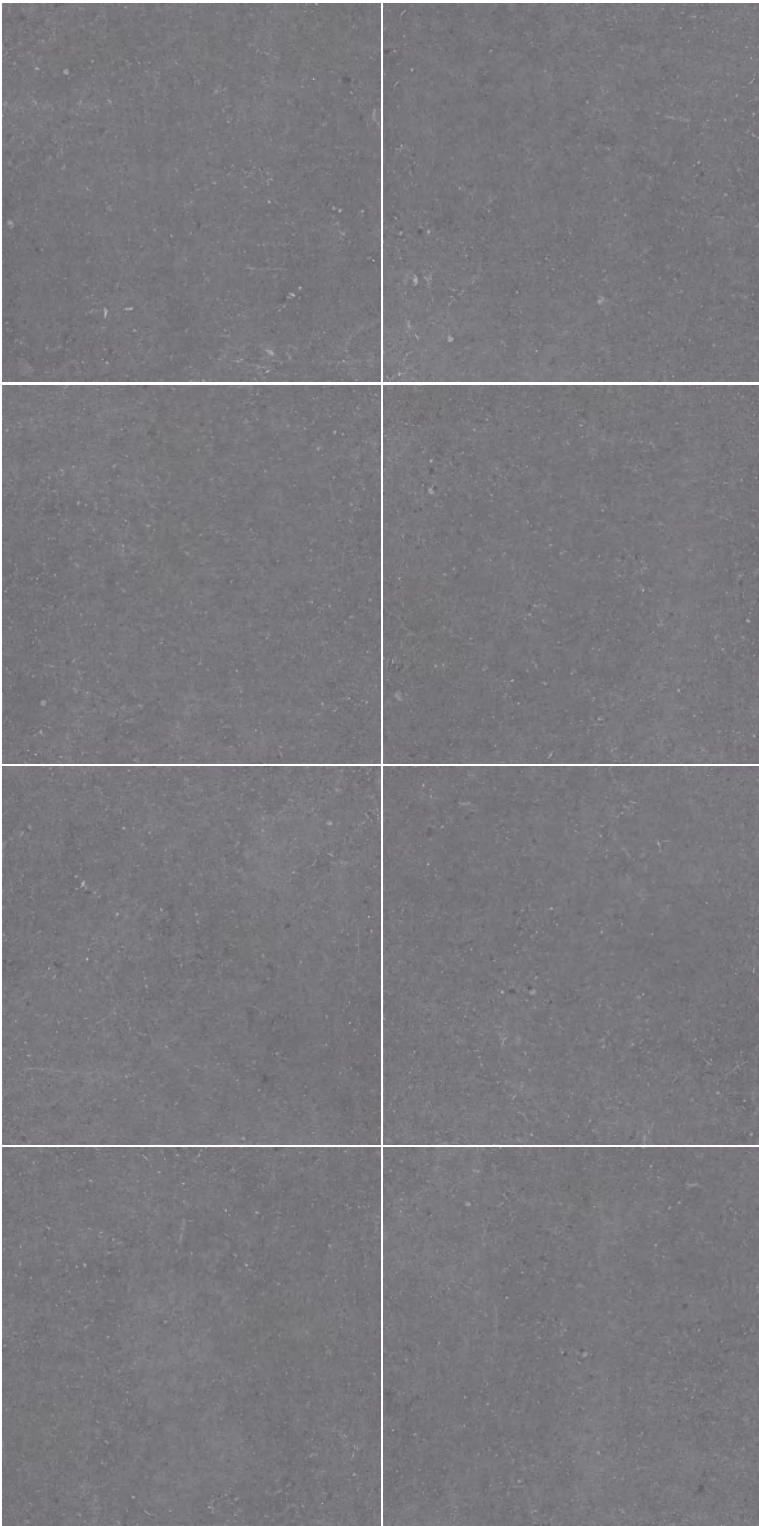

ATOLL NERO

PRODUCT INFORMATION

9MM



60×60cm/24"× 24"
12 faces



60×30cm/24"× 12"
24 faces




30×30cm/12"× 12"
48 faces

- ☒ Matt
- ☒ Lappato



V2

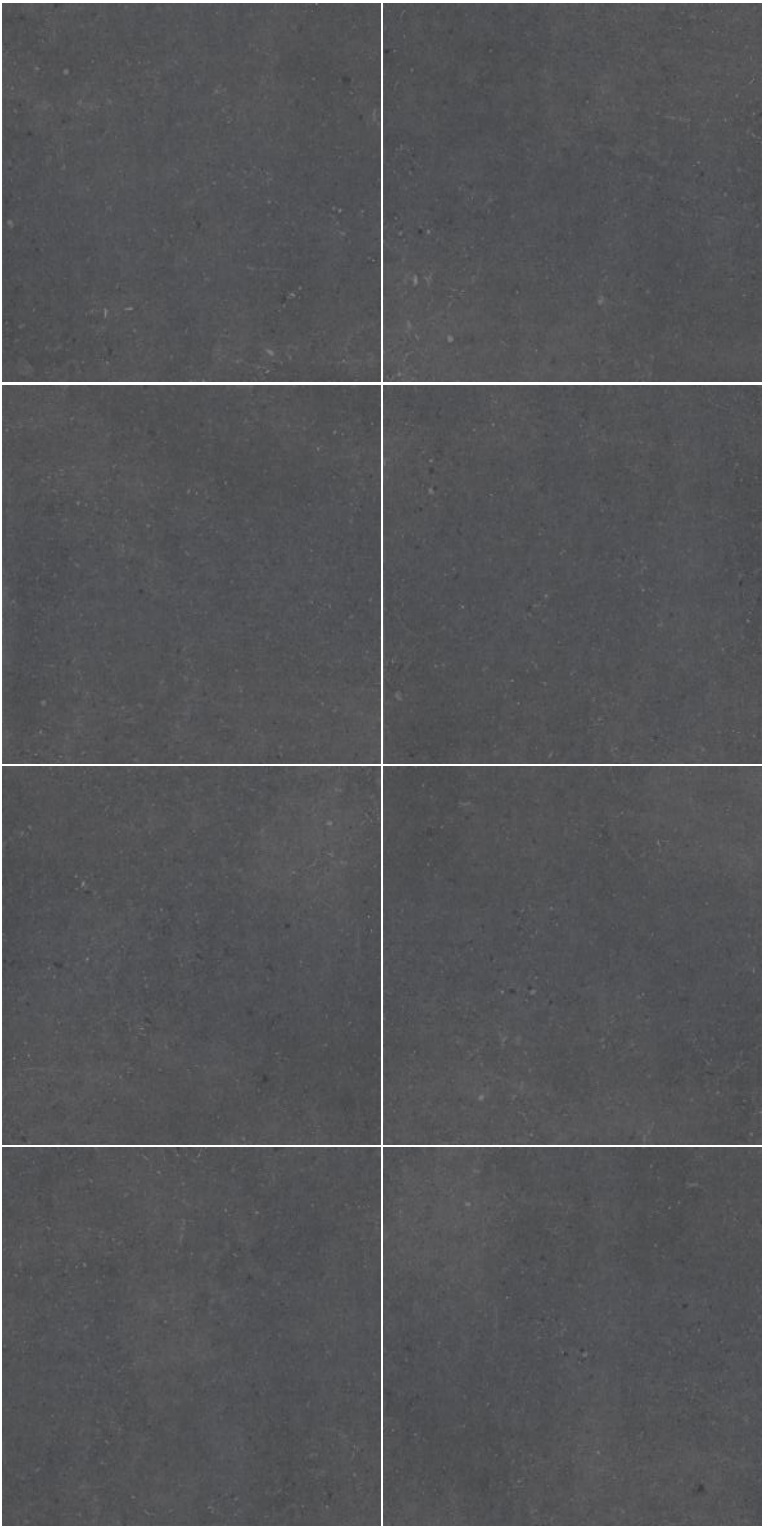


TECHNICAL SPECIFICATIONS


TECHNICAL CHARACTERISTIC	STANDARD TEST METHOD	ISO STANDARD REQUIREMENT	OUR VALUES
Length & Width	ISO 10545-2	±0.6%MAX	±0.30%Max
Thickness	ISO 10545-2	±5.0%MAX	±5.0%Max
Sides Straightness	ISO 10545-2	±5%MAX	±0.25%Max
Rectangularity	ISO 10545-2	±0.5%MAX	±0.25%Max
Flatness : a) Centre Curvature b) Edge Curvature c) Warpage	ISO 10545-2 ISO 10545-2 ISO 10545-2	±0.5%MAX ±0.5%MAX ±0.5%MAX	±0.20%Max/Max2.0mm ±0.20%Max/Max2.0mm ±0.20%Max/Max2.0mm
Surface Quality	ISO 10545-2	≥95%FREE From visible defect	Comply
Water Absorption	ISO 10545-3	≤0.5%	≤0.20%
Breaking Strength	ISO 10545-4	≥1300N	≥1300N
Modulus Of Rupture	ISO 10545-4	≥35N/mm ² Individual ≥32N/mm²	≥35N/mm ² Individual ≥32N/mm²
Abrasion Resistance a) Deep Abrasion For Unglazed Tiles b) Surfaces Abrasion For Glazed Tiles	ISO 10545-6 ISO 10545-7	≤175mm ³ Manuf.to state abrasion class, cycle and passed	≤160mm ³ ≥PEI 3 (Dependent On Product Type)
Crazing Test (glazed Tiles)	ISO 10545-11	No Sign Of Crazing	No Sign Of Crazing
Frost Resistance	ISO 10545-12	Required	No Visible Crack
Chemical Resistance a) low concentrations b) household chemicaIs and Swimming pool salts	ISO 10545-13 ISO 10545-13	Manuf. to state ≥class B	Class A Class B(For Polished Tiles) Class A Class B(For Polished Tiles)
Stain Resistance a) for unglazed tiles b) for glazed tiles	ISO 10545-14 ISO 10545-14	Manuf. to state ≥class 3	≥Class 3 ≥Class 3
Slip Resistance (Excluding Polished,Lappato And Satin Finishing)	AS/NZS 4586 App.A	Manuf. to state	Wet Pendulum≥P4 (Dependent On Product Type)

PACKING SPECIFICATIONS


SERIES	SIZES	PCS/CTN	m ² /CTN	KG/CTN	m ² /PLT	KG/PLT	CTN/PLT
ATOLL	60x120/24”x48”	2	1.44	32	80.64	1792	56
	60x60/24”x24”	4	1.44	30	57.60	1200	40
	30x60/12”x24”	8	1.44	30	57.60	1200	40
	30x30/12”x12”	11	0.99	21	55.44	1176	56



UNIFORM
VARIATION
V1



SLIGHT
VARIATION
V2



MODERATE
VARIATION
V3



SUBSTANTIAL
VARIATION
V4



Foshan Casagres International Co, Ltd.
info@casagresintl.com
www.casagresintl.com