
LIMESTONE





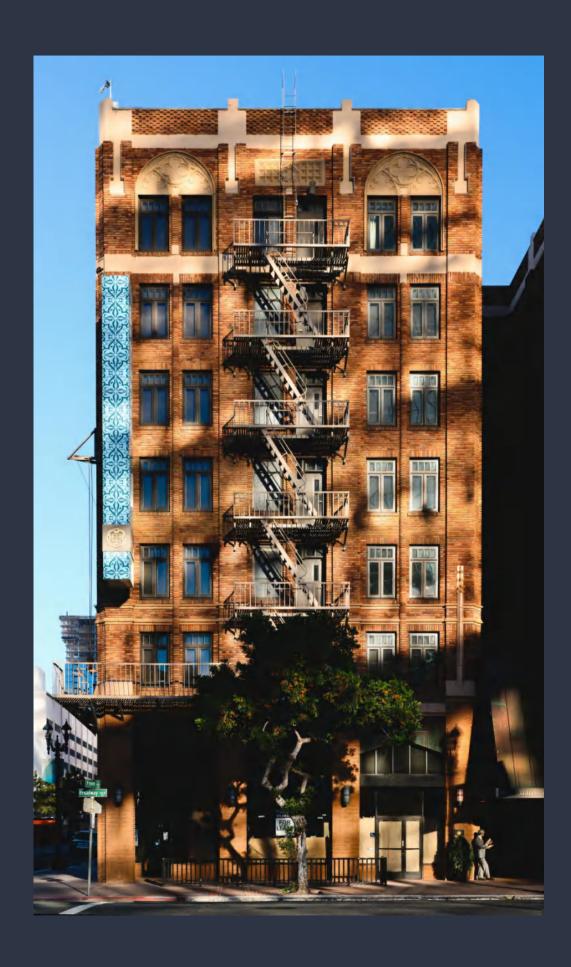

LIMESTONE

The LIMESTONE collection is a testament to the fusion of durability and elegance. Engineered with the latest in ceramic technology, these tiles boast an unparalleled level of resistance to wear, tear, and environmental elements.

Inspired by the natural veining and hues of genuine limestone, each tile is a masterpiece in itself. The intricate patterns and subtle color variations capture the essence of nature's artistry, creating a visual experience that is both soothing and captivating.

The tiles are meticulously crafted to offer a seamless, continuous look when laid out, enhancing the overall aesthetic of any space.

The LIMESTONE collection is a trendsetter in the world of interior design, blending classic charm with contemporary style.

Its versatile design complements a variety of decor styles, from traditional to modern, making it a favorite among designers and homeowners alike.

The tiles are available in multiple sizes and finishes, allowing for creative installations that cater to personal tastes and design trends.






LIMESTONE

Matt


5 COLOURS



4 SIZES

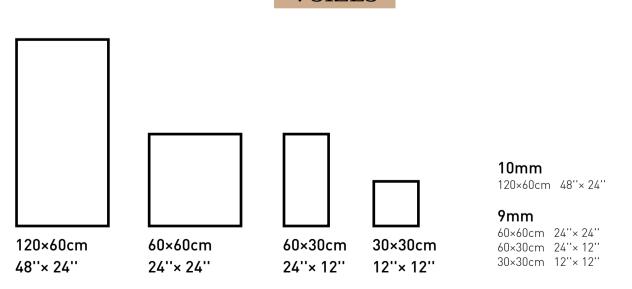



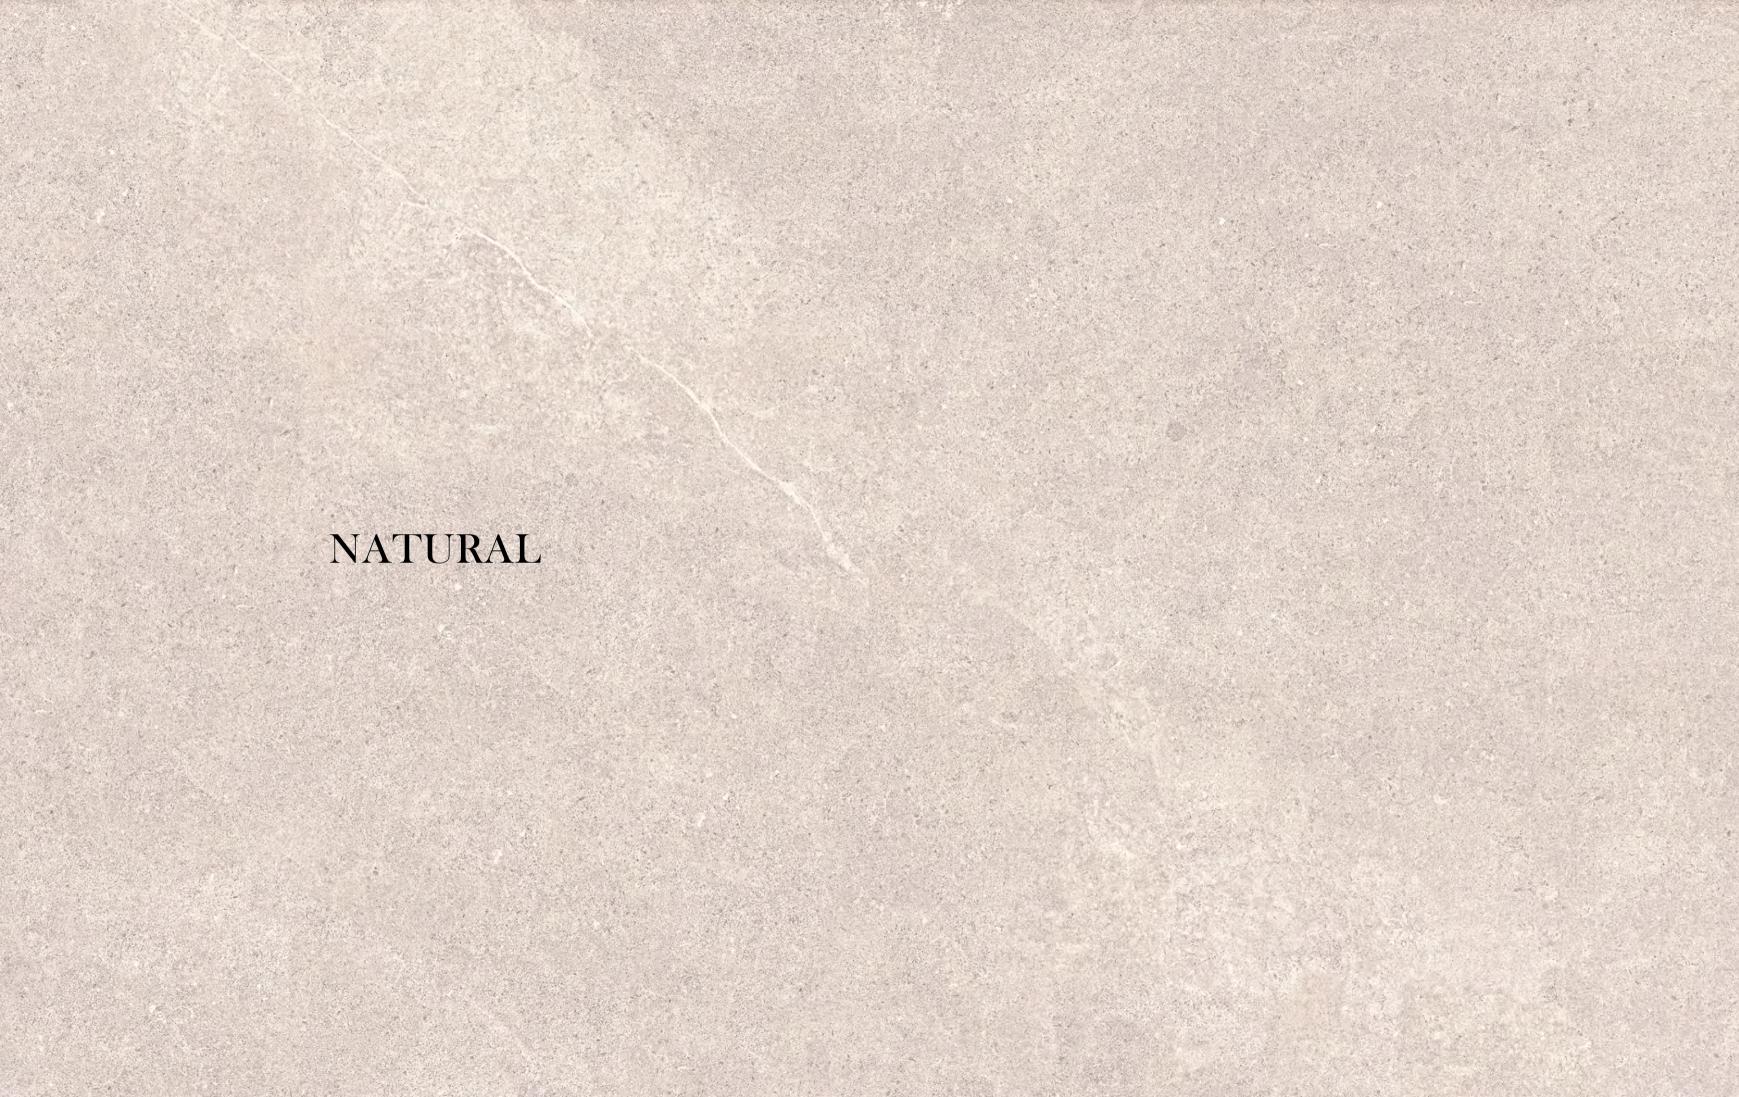








• Floor . LIMESTONE - NATURAL MATT 60X120cm - 48''× 24''





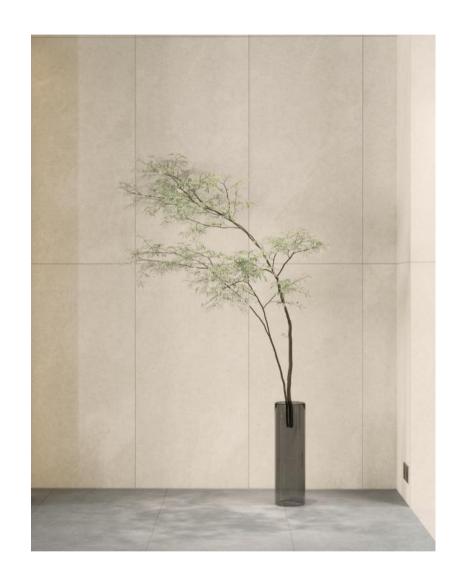


• Wall . LIMESTONE - SAND MATT 60X120cm - 48''× 24''



PERLA



• Floor . LIMESTONE - PERLA MATT 60X120cm - 48''× 24''

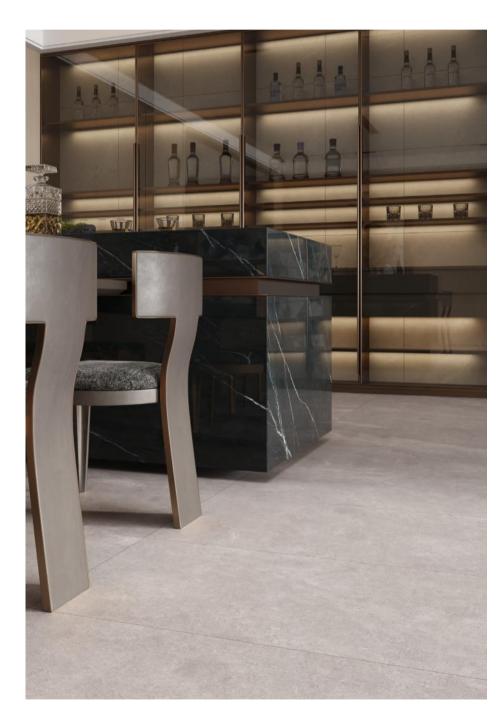










• Floor . LIMESTONE - GRIGIO MATT 60X120cm - 48''× 24''

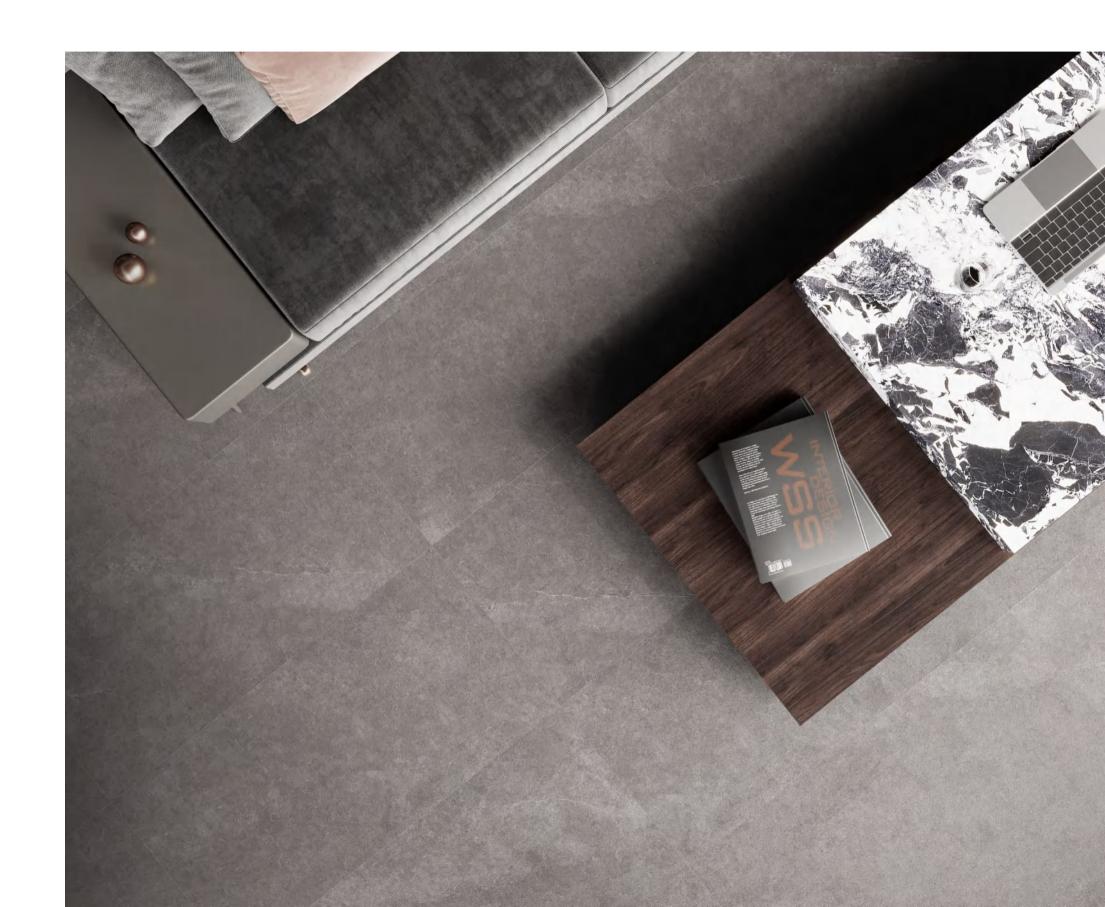

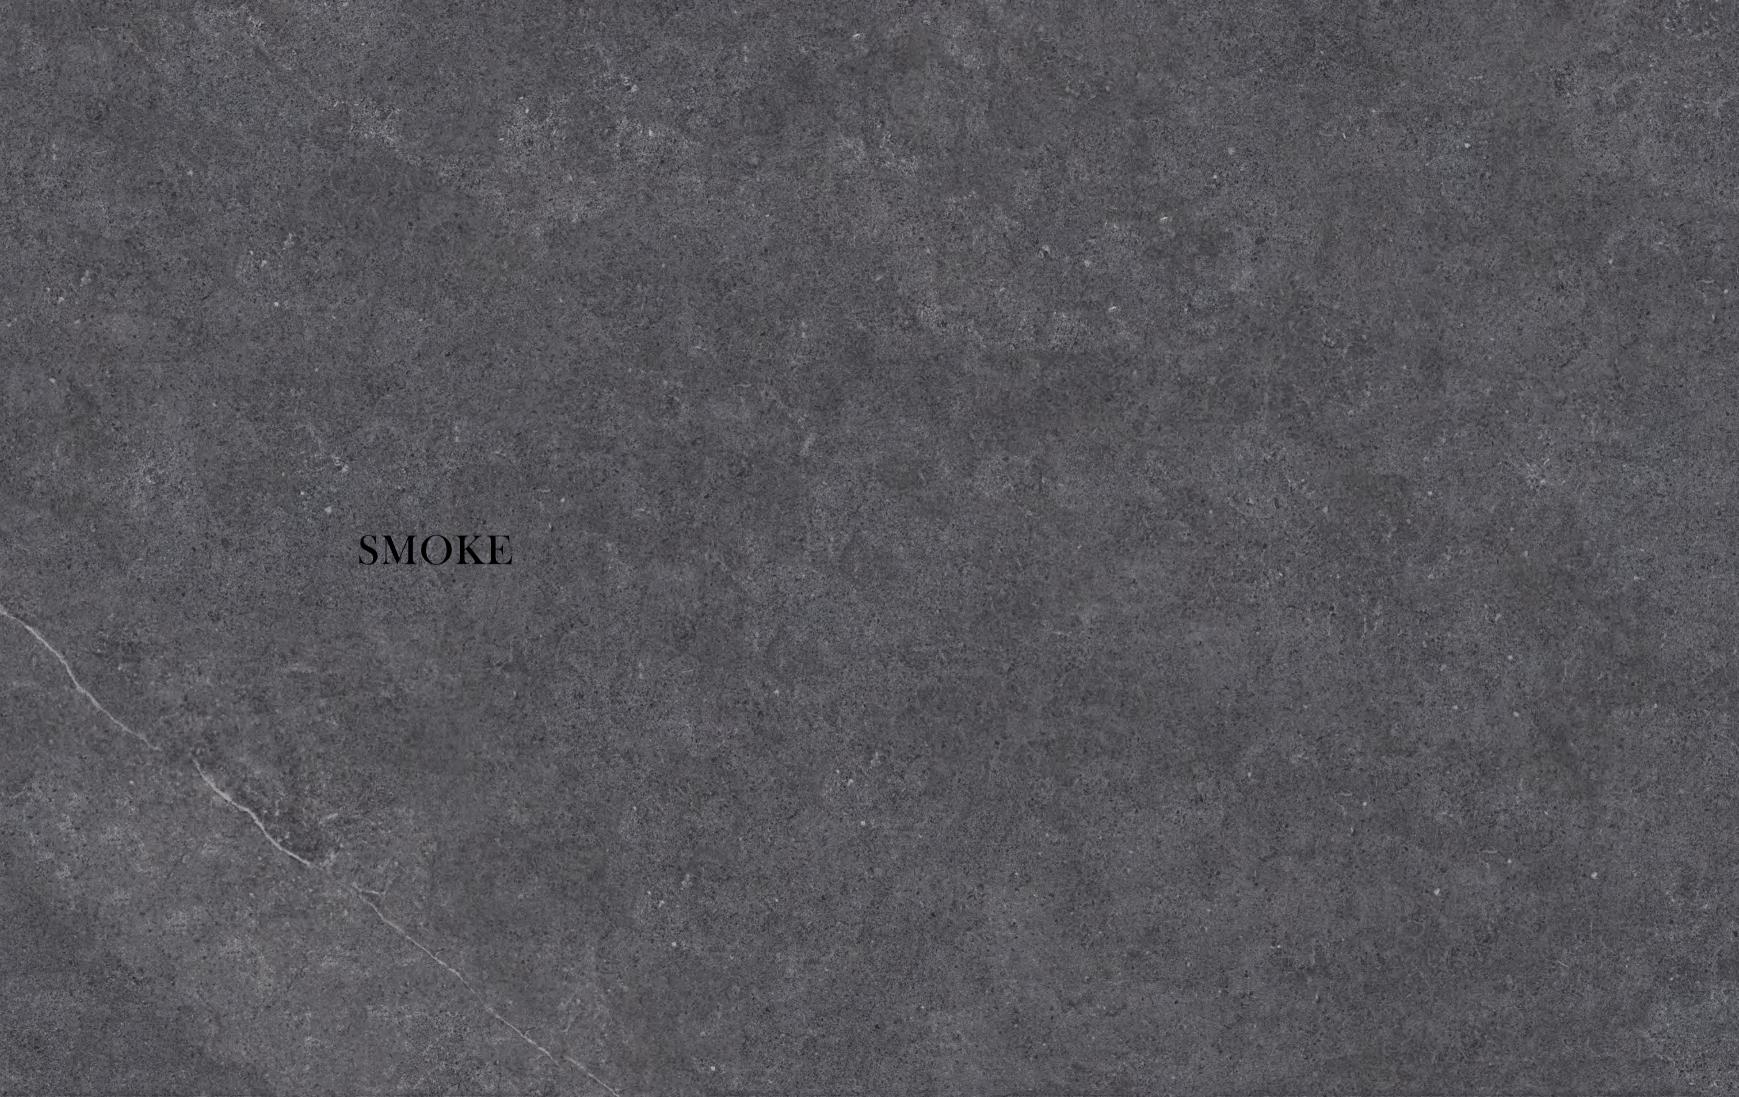








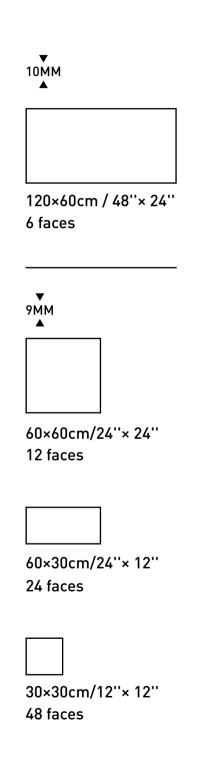




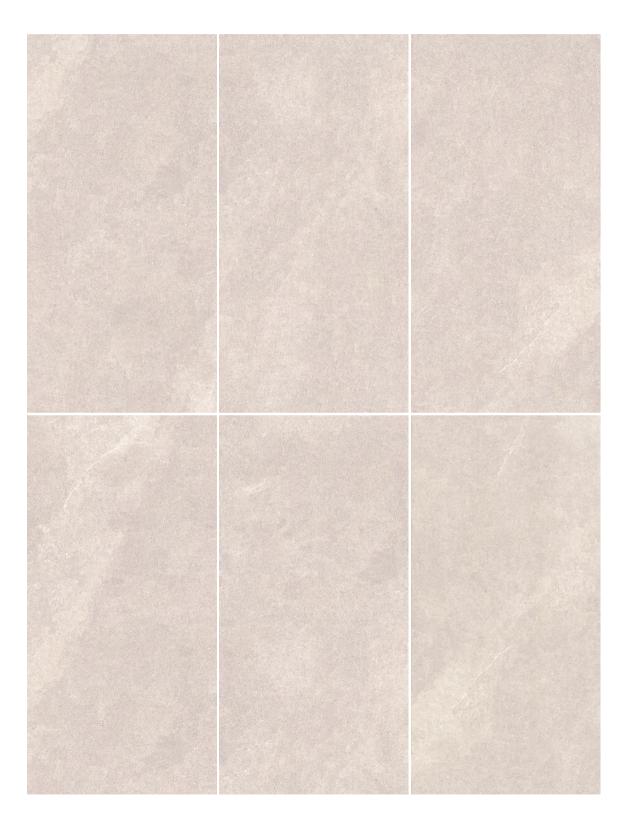




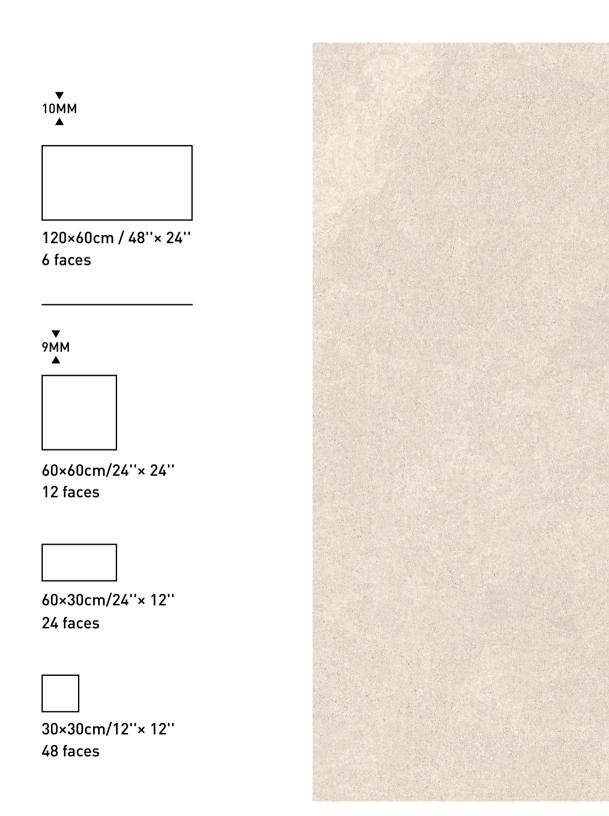

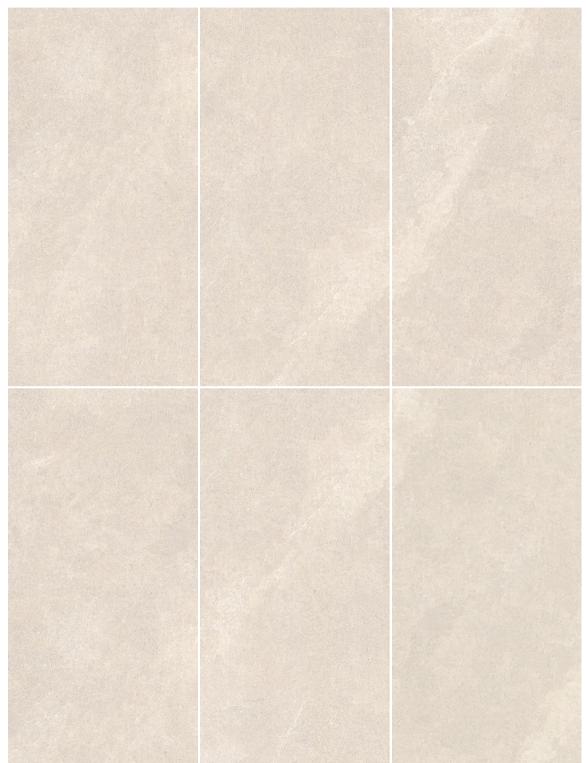






LIMESTONE PERLA

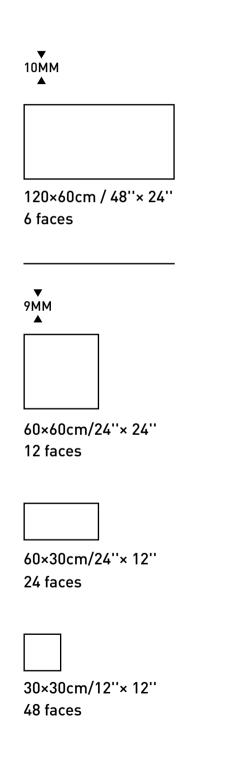




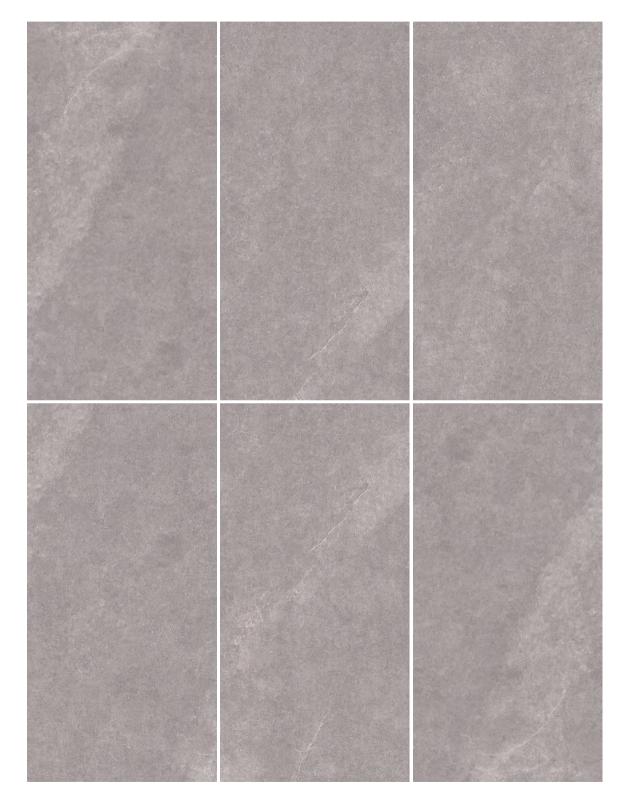





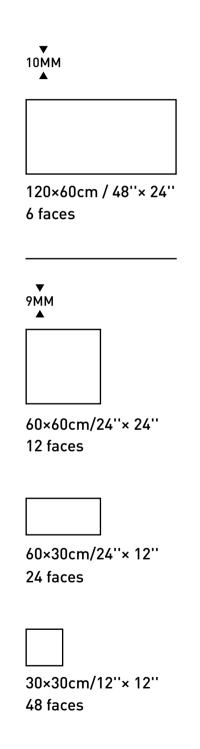



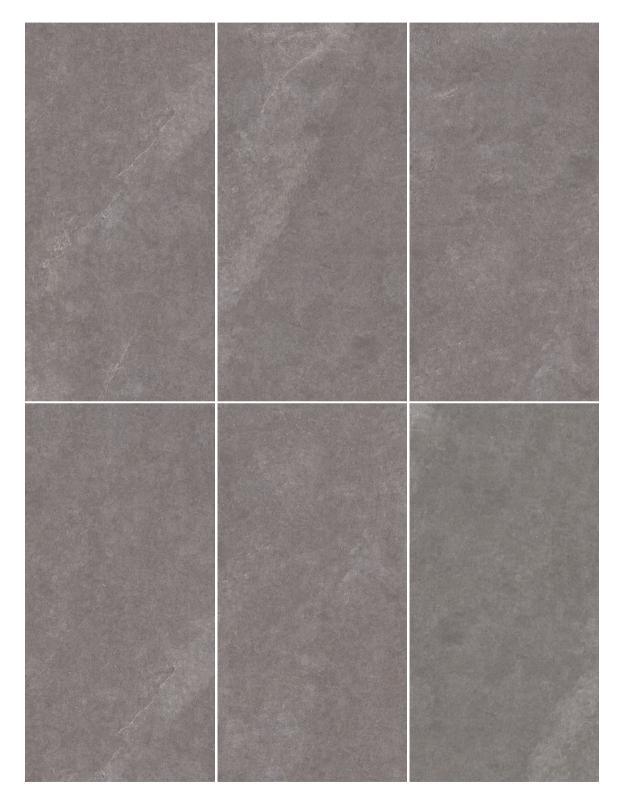



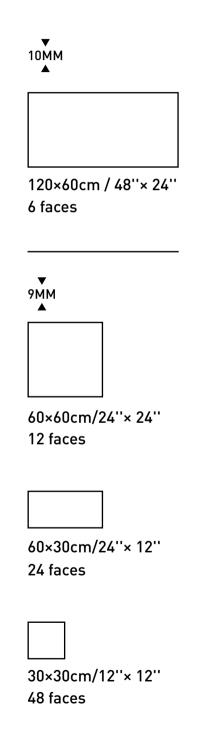









TECHNICAL SPECIFICATIONS


TECHNICAL CHARACTERISTIC	STANDARD TEST METHOD	ISO STANDARD REQUIREMENT	OUR VALUES	
Length & Width	ISO 10545-2	±0.6%Max	±0.3%Max	
Thickness	ISO 10545-2	±5.0%Max	±5.0%Max	
Sides Straightness	ISO 10545-2	±5.0%Max	±0.25%Max	
Rectangularity	ISO 10545-2	±0.5%Max	±0.25%Max	
Flatness: a) Centre Curvature b) Edge Curvature c) Warpage	ISO 10545-2 ISO 10545-2 ISO 10545-2	±0.5%Max ±0.5%Max ±0.5%Max	±0.2%Max/Max2.0mm ±0.2%Max/Max2.0mm ±0.2%Max/Max2.0mm	
Surface Quality	ISO 10545-2	≥ 95%FREE From visible defect	Comply	
Water Absorption	ISO 10545-3	≤ 0.5%	≤ 0.20%	
Breaking Strength	ISO 10545-4	≥ 1300N	≥ 1300N	
Modulus Of Rupture	ISO 10545-4	≥ 35N/mm² Individual ≥ 32N/mm²	≥ 35N/mm² Individual ≥ 32N/mm²	
Abrasion Resistance a) Deep Abrasion For Unglazed Tiles b) Surfaces Abrasion For Glazed Tiles	ISO 10545-6 ISO 10545-7	≤ 175mm³ Manuf.to state abrasion class,cycie and passed	≤ 160mm³ ≥ PEI 3 (Dependent On Product Type)	
Crazing Test (glazed Tiles)	ISO 10545-11	No Sign Of Crazing	No Sign Of Crazing	
Frost Resistance	ISO 10545-12	Required	No Visible Crack	
Chemical Resistance a) low concentrations b) household chemicais and Swimming pool salts	ISO 10545-13 ISO 10545-13	Manuf. to state ≥ class B	Class A Class B(For Polished Tiles) Class A Class B(For Polished Tiles)	
Stain Resistance a) for unglazed tiles b) for glazed tiles	ISO 10545-14 ISO 10545-14	Manuf. to state ≥ class 3	≥ Class 3 ≥ Class 3	
Slip Resistance (Excluding Polished, Lappato And Satin Finishing)	AS/NZS 4586 App.A	Manuf. to state	Wet Pendulum ≥ P4 (Dependent On Product Type)	

PACKING SPECIFICATIONS

SERIES	SIZES	PCS/CTN	m²/CTN	KG/CTN	m²/PLT	KG/PLT	CTN/PLT
LIMESTONE	60x120 / 24"x48"	2	1.44	32	97.92	2176	68
	60x60 / 24"x24"	4	1.44	30	57.60	1200	40
	30x60 / 12"x24"	8	1.44	30	57.60	1200	40
	30x30 / 12"x12"	16	1.44	30	57.60	1200	40













Foshan Casagres International Co, Ltd. info@casagresintl.com www.casagresintl.com