
SAVANA





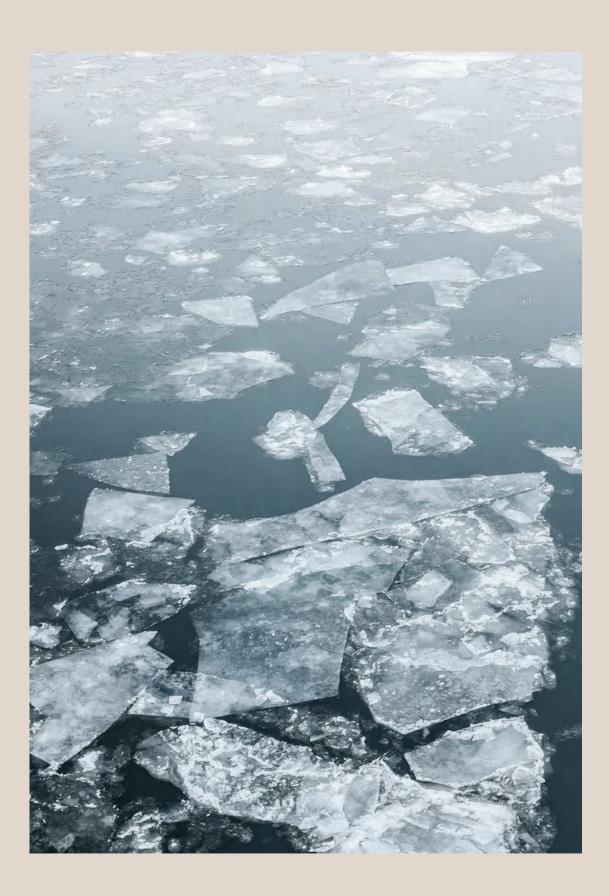

SAVANA

Where Art Meets Nature.

Inspired by the raw elegance of natural stone and the timeless beauty of artistic craftsmanship, the SAVANA series redefines modern interiors with its harmonious blend of organic textures and refined aesthetics. Each tile captures the essence of weathered stone surfaces, showcasing intricate veining, subtle tonal variations, and tactile depth that mirror nature's artistry.

Drawing from geological formations, the collection features a palette of neutral hues—soft greys, earthy beiges, and muted taupes—that evoke the serene landscapes of untouched wilderness. Advanced texture replication technology ensures every piece retains the authentic character of natural stone, while offering the durability and low-maintenance benefits of premium ceramic.

Perfect for both residential and commercial spaces, SAVANA transforms floors and walls into canvases of understated luxury. Its versatile application pairs seamlessly with minimalist designs or rustic-chic interiors, bridging the gap between organic authenticity and contemporary sophistication.

Embrace the spirit of nature, elevated by human artistry—SAVANA are more than surfaces; they're a celebration of timeless beauty.





SAVANA

Matt | Lappato |

4 COLOURS










WHITE

SAND

GREY

DARK

4 SIZES

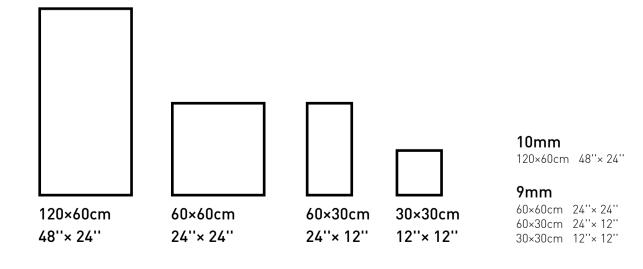












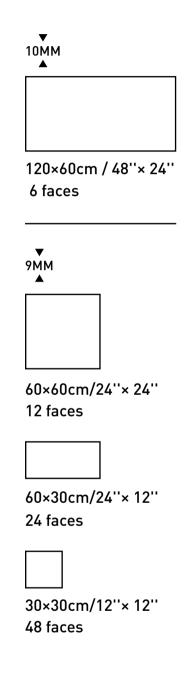










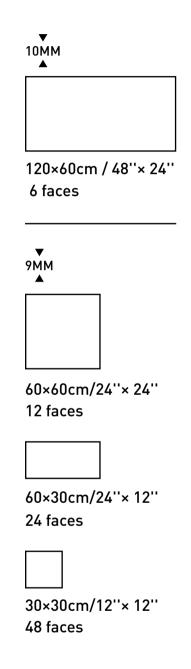












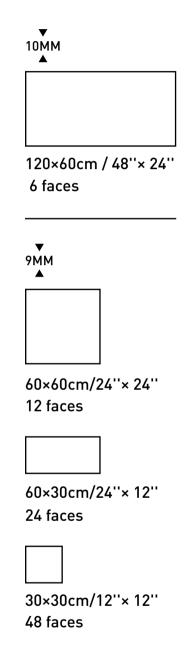










™ Lappato

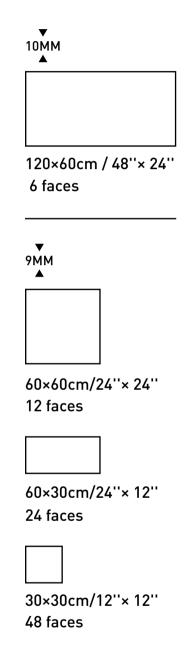












TECHNICAL SPECIFICATIONS


| TECHNICAL CHARACTERISTIC | STANDARD ISO STANDAR TEST METHOD REQUIREMEN | | OUR VALUES | |
|---|--|---|--|--|
| Length & Width | ISO 10545-2 | ±0.6%Max | ±0.3%Max | |
| Thickness | ISO 10545-2 | ±5.0%Max | ±5.0%Max | |
| Sides Straightness | ISO 10545-2 | ±5.0%Max | ±0.25%Max | |
| Rectangularity | ISO 10545-2 | ±0.5%Max | ±0.25%Max | |
| Flatness: a) Centre Curvature b) Edge Curvature c) Warpage | ISO 10545-2 ISO 10545-2 ISO 10545-2 | ±0.5%Max ±0.5%Max ±0.5%Max | ±0.2%Max/Max2.0mm ±0.2%Max/Max2.0mm ±0.2%Max/Max2.0mm | |
| Surface Quality | ISO 10545-2 | ≥ 95%FREE From visible defect | Comply | |
| Water Absorption | ISO 10545-3 | ≤ 0.5% | ≤ 0.20% | |
| Breaking Strength | ISO 10545-4 | ≥ 1300N | ≥ 1300N | |
| Modulus Of Rupture | ISO 10545-4 | ≥ 35N/mm² Individual ≥ 32N/mm² | ≥ 35N/mm² Individual ≥ 32N/mm² | |
| Abrasion Resistance a) Deep Abrasion For Unglazed Tiles b) Surfaces Abrasion For Glazed Tiles | ISO 10545-6 ISO 10545-7 | ≤ 175mm³ Manuf.to state abrasion class,cycie and passed | ≤ 160mm³ ≥ PEI 3 (Dependent On Product Type) | |
| Crazing Test (glazed Tiles) | ISO 10545-11 | No Sign Of Crazing | No Sign Of Crazing | |
| Frost Resistance | ISO 10545-12 | Required | No Visible Crack | |
| Chemical Resistance a) low concentrations b) household chemicais and Swimming pool salts | ISO 10545-13 ISO 10545-13 | Manuf. to state ≥ class B | Class A Class B(For Polished Tiles) Class A Class B(For Polished Tiles) | |
| Stain Resistance a) for unglazed tiles b) for glazed tiles | ISO 10545-14 ISO 10545-14 | Manuf. to state ≥ class 3 | ≥ Class 3 ≥ Class 3 | |
| Slip Resistance (Excluding Polished, Lappato And Satin Finishing) | AS/NZS 4586 App.A | Manuf. to state | Wet Pendulum ≥ P4 (Dependent On Product Type) | |

PACKING SPECIFICATIONS

| SERIES | SIZES | PCS/CTN | m²/CTN | KG/CTN | m²/PLT | KG/PLT | CTN/PLT |
|--------|------------------|---------|--------|--------|--------|--------|---------|
| SAVANA | 60x120 / 24"x48" | 2 | 1.44 | 32 | 97.92 | 2176 | 68 |
| | 60x60 / 24"x24" | 4 | 1.44 | 30 | 57.60 | 1200 | 40 |
| | 30x60 / 12"x24" | 8 | 1.44 | 30 | 57.60 | 1200 | 40 |
| | 30x30 / 12"x12" | 16 | 1.44 | 30 | 57.60 | 1200 | 40 |











Foshan Casagres International Co, Ltd. info@casagresintl.com www.casagresintl.com