


TERRAZZO



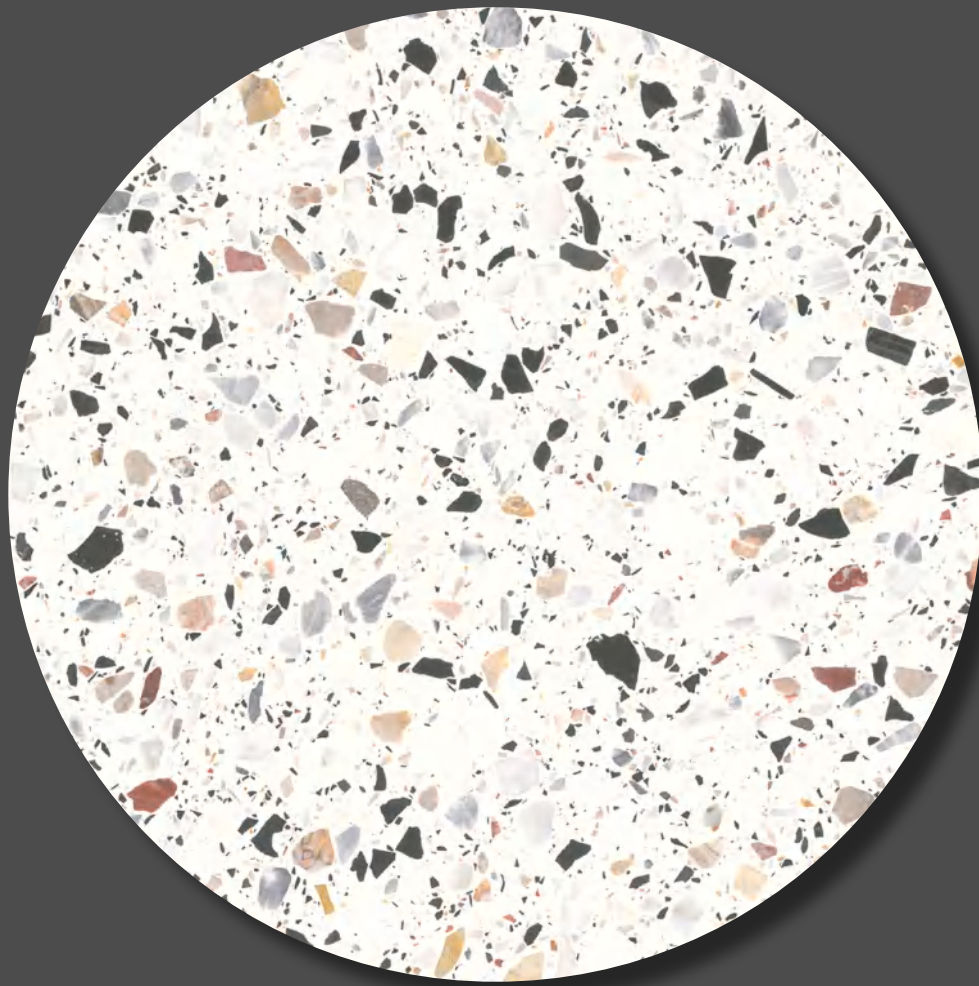

TERRAZZO

In the world of interior design, terrazzo tiles are currently at the forefront of fashion trends. Their unique speckled appearance, created by a mixture of chips and aggregates, gives a distinct and artistic look.

These tiles exude a sense of vitality. The random patterns and color combinations within terrazzo tiles bring a dynamic energy to any space.

In luxury hotels, high - end residences, and upscale office buildings, terrazzo tiles are often the choice for those who demand the best in both aesthetics and quality. They are a symbol of refined taste and a statement of luxury in any interior design scheme.



TERRAZZO



TERRAZZO

| Sliptech |

2 COLOURS




MIX




NOUGAT


4 SIZES



120×60cm
48"× 24"



60×60cm
24"× 24"



60×30cm
24"× 12"



30×30cm
12"× 12"

10mm
120×60cm 48"× 24"

9mm
60×60cm 24"× 24"
60×30cm 24"× 12"
30×30cm 12"× 12"





• Desktop .
TERRAZZO - MIX
SLIPTECH
60X60cm - 24" x 24"

• Floor .
BALI - PEARL
MATT
60X60cm - 24" x 24"



• Floor / Desktop .
TERRAZZO - MIX
SLIPTECH
60X120cm - 48" x 24"



• Floor .
TERRAZZO - NOUGAT
MATT
60X60cm - 24" x 24"

• Floor .
SAVANA- SAND
MATT
60X60cm - 24" x 24"



• Floor .
CANYON- SAND
MATT
120X60cm - 48" x 24"

• Wall .
TERRAZZO - NOUGAT
MATT
60X60cm - 24" x 24"

TERRAZZO

MIX


PRODUCT INFORMATION

▼
10MM
▲



120×60cm / 48"× 24"
8 faces

▼
9MM
▲



60×60cm/24"× 24"
16 faces



60×30cm/24"× 12"
32 faces



30×30cm/12"× 12"
64 faces



V2



Sliptech




TERRAZZO

NOUGAT


PRODUCT INFORMATION

▼
10MM
▲




120×60cm / 48"× 24"
6 faces

▼
9MM
▲



60×60cm/24"× 24"
12 faces



60×30cm/24"× 12"
24 faces



30×30cm/12"× 12"
48 faces



✔ Sliptech

 V2


TECHNICAL SPECIFICATIONS

TECHNICAL CHARACTERISTIC	STANDARD TEST METHOD	ISO STANDARD REQUIREMENT	OUR VALUES
Length & Width	ISO 10545-2	±0.6%Max	±0.3%Max
Thickness	ISO 10545-2	±5.0%Max	±5.0%Max
Sides Straightness	ISO 10545-2	±5.0%Max	±0.25%Max
Rectangularity	ISO 10545-2	±0.5%Max	±0.25%Max
Flatness: a) Centre Curvature b) Edge Curvature c) Warpage	ISO 10545-2 ISO 10545-2 ISO 10545-2	±0.5%Max ±0.5%Max ±0.5%Max	±0.2%Max/Max2.0mm ±0.2%Max/Max2.0mm ±0.2%Max/Max2.0mm
Surface Quality	ISO 10545-2	≥ 95%FREE From visible defect	Comply
Water Absorption	ISO 10545-3	≤ 0.5%	≤ 0.20%
Breaking Strength	ISO 10545-4	≥ 1300N	≥ 1300N
Modulus Of Rupture	ISO 10545-4	≥ 35N/mm ² Individual ≥ 32N/mm ²	≥ 35N/mm ² Individual ≥ 32N/mm ²
Abrasion Resistance a) Deep Abrasion For Unglazed Tiles b) Surfaces Abrasion For Glazed Tiles	ISO 10545-6 ISO 10545-7	≤ 175mm ³ Manuf.to state abrasion class,cycie and passed	≤ 160mm ³ ≥ PEI 3 (Dependent On Product Type)
Crazing Test (glazed Tiles)	ISO 10545-11	No Sign Of Crazing	No Sign Of Crazing
Frost Resistance	ISO 10545-12	Required	No Visible Crack
Chemical Resistance a) low concentrations b) household chemicalais and Swimming pool salts	ISO 10545-13 ISO 10545-13	Manuf. to state ≥ class B	Class A Class B(For Polished Tiles) Class A Class B(For Polished Tiles)
Stain Resistance a) for unglazed tiles b) for glazed tiles	ISO 10545-14 ISO 10545-14	Manuf. to state ≥ class 3	≥ Class 3 ≥ Class 3
Slip Resistance (Excluding Polished, Lappato And Satin Finishing)	AS/NZS 4586 App.A	Manuf. to state	Wet Pendulum ≥ P4 (Dependent On Product Type)



PACKING SPECIFICATIONS


SERIES	SIZES	PCS/CTN	m ² /CTN	KG/CTN	m ² /PLT	KG/PLT	CTN/PLT
TERRAZZO	60x120 / 24"x48"	2	1.44	32	97.92	2176	68
	60x60 / 24"x24"	4	1.44	30	57.60	1200	40
	30x60 / 12"x24"	8	1.44	30	57.60	1200	40
	30x30 / 12"x12"	16	1.44	30	57.60	1200	40




UNIFORM
VARIATION
V1



SLIGHT
VARIATION
V2



MODERATE
VARIATION
V3



SUBSTANTIAL
VARIATION
V4

Foshan Casagres International Co, Ltd.
info@casagresintl.com
www.casagresintl.com