
# QUARTZITE





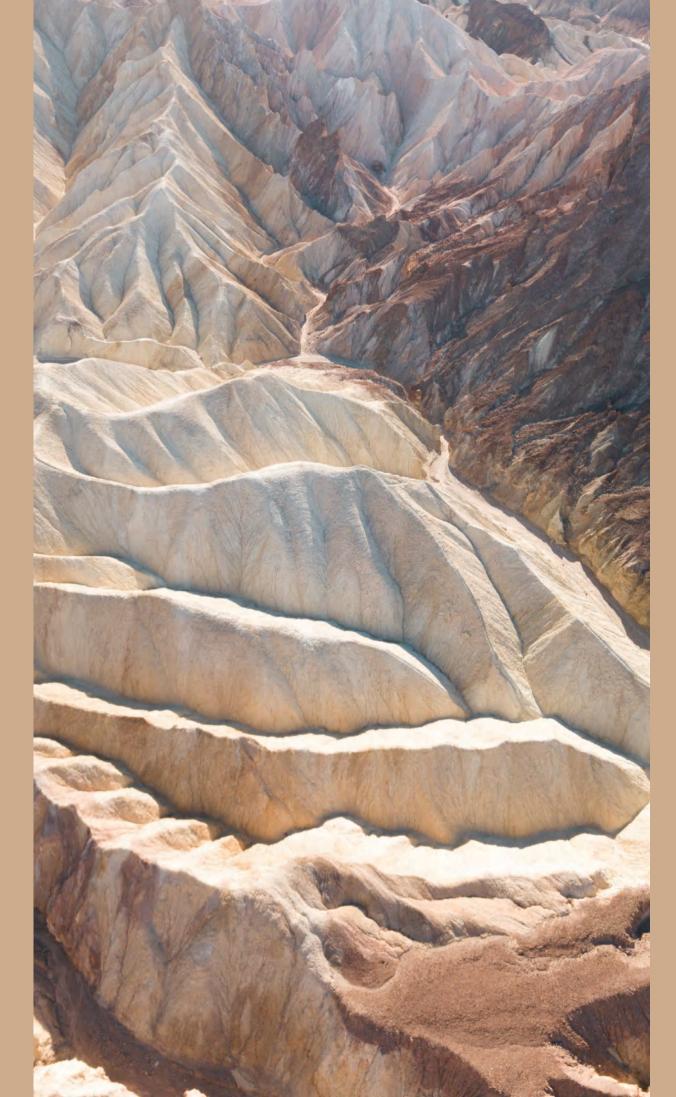

## **QUARTZITE**

QUARTZITE are a revolutionary addition to the world of interior design, offering a perfect blend of natural beauty and modern functionality. Each tile showcases a unique pattern of veins that meander across the surface, creating an organic and dynamic look.


The surface of the tiles is resistant to scratches, stains, and fading, making them ideal for high-traffic areas such as kitchens, bathrooms, and entryways.

Versatile Design Styles One of the most remarkable features of QUARTZITE is their versatility in design. They effortlessly blend with a wide range of interior styles, from classic and traditional to modern and contemporary. In a traditional setting, the warm, earthy tones and organic veining of QUARTZITE add a touch of timeless elegance, complementing rich wood furnishings and ornate decor.

In conclusion, QUARTZITE offer a perfect combination of stunning aesthetics and practical functionality. With their captivating textures, immaculate surfaces, and versatile design potential, they are the ideal choice for those who seek to elevate their spaces with a touch of refined luxury.





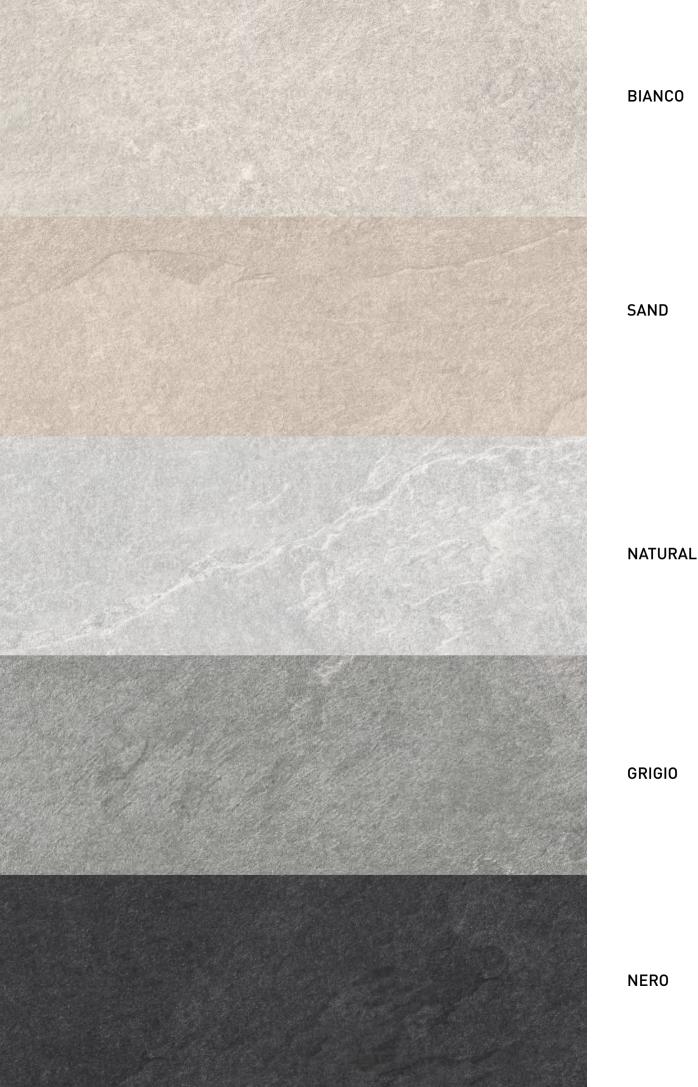

**BIANCO** 

## QUARTZITE

Matt | Lappato |


#### ► Matt+3D


A revolutionary production process, which combines the materiality with the aesthetics of the product, until obtaining surfaces with extraordinary sensory surfaces with extraordinary sensory value. The new 3D Tech technology allows thick layers of various ceramic materials to be applied in perfect alignment with the underlying graphic designs, which are created digitally with extremely high definition. This revolutionary production process combines material and aesthetic effects to create surfaces with extraordinary to create surfaces with extraordinary sensory appeal.



**GRIGIO** 

**NERO** 

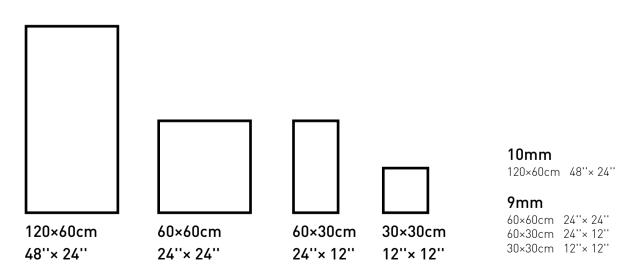

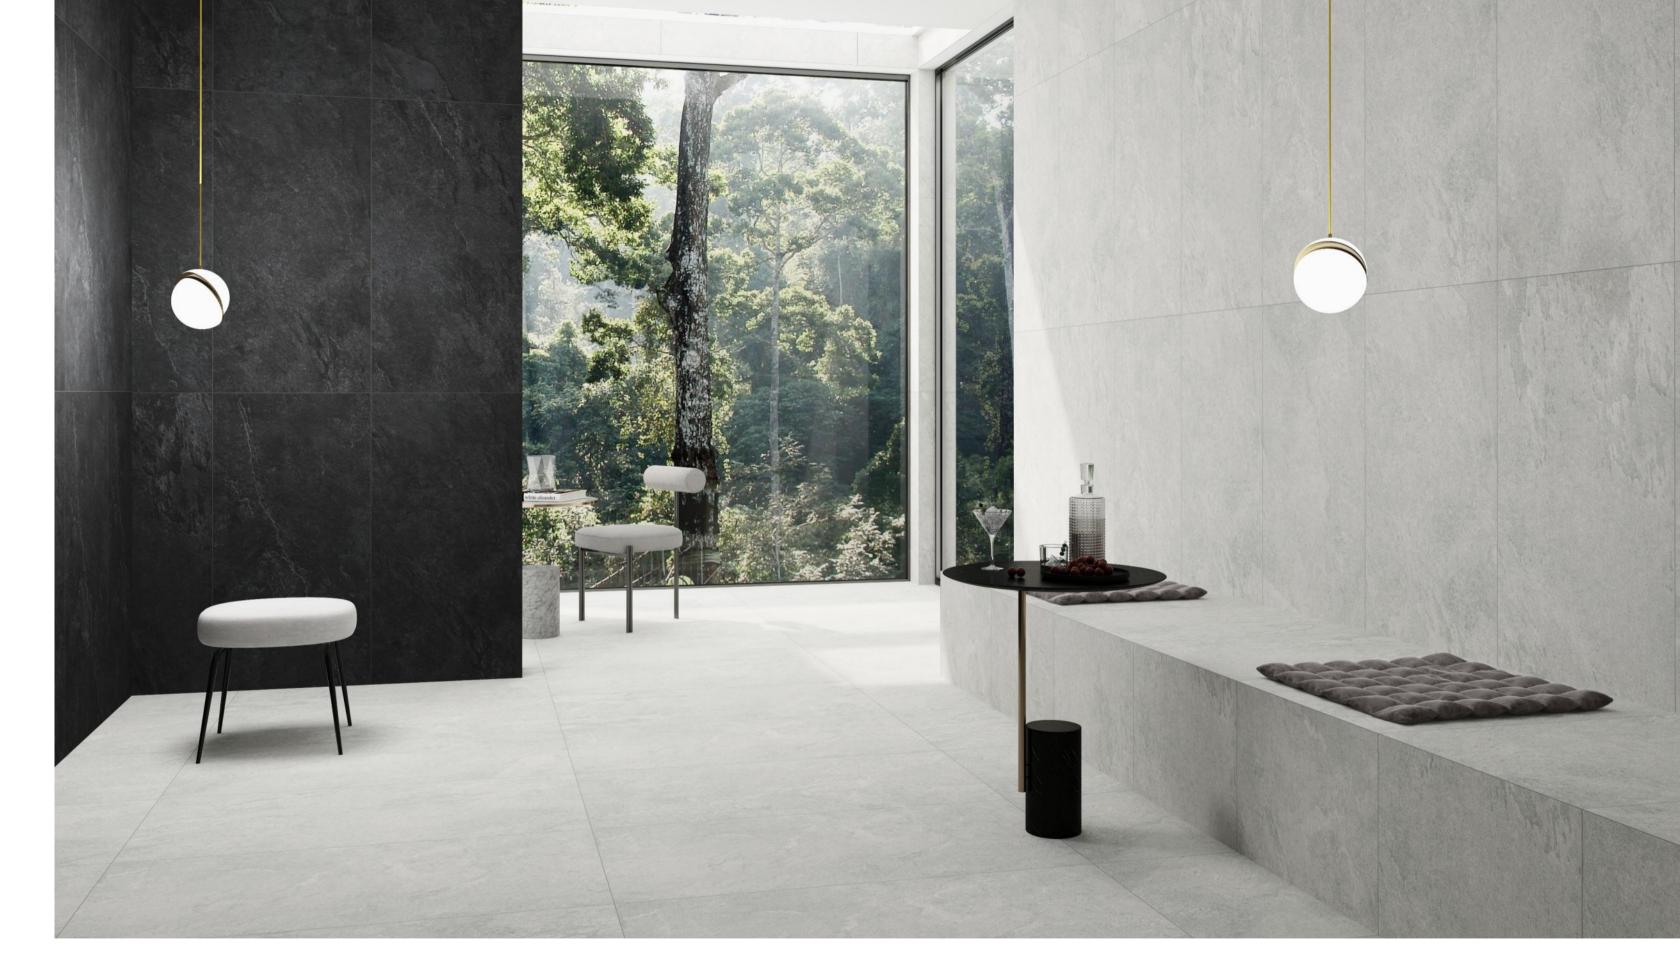

• Floor . QUARTZITE - NATURAL MATT 60X120cm - 48"× 24"








• Floor / Wall . QUARTZITE - NATURAL MATT 60X120cm - 48"× 24"



• Floor .
QUARTZITE - SAND
MATT
60X120cm - 48"× 24"

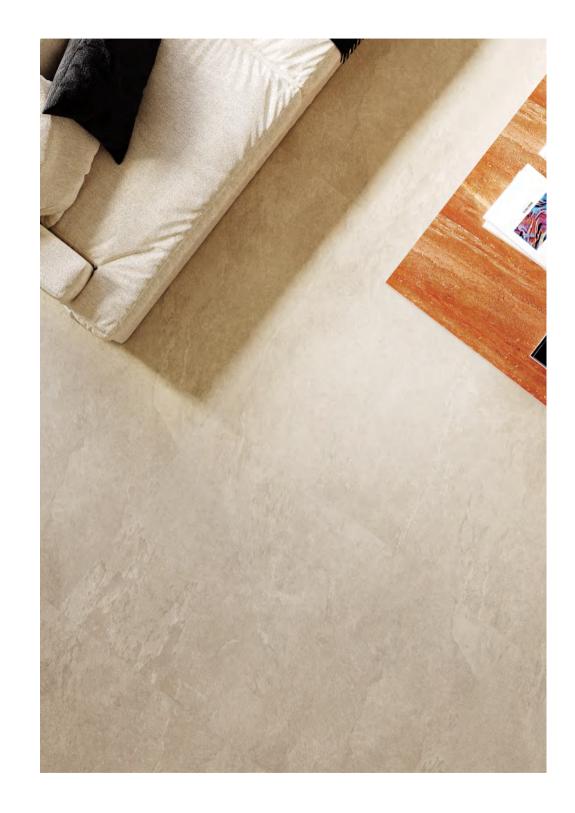

• Floor . QUARTZITE - SAND MATT 60X120cm - 48''× 24''







• Floor . QUARTZITE - GRIGIO MATT 60X120cm - 48''× 24''





• Floor . QUARTZITE - GRIGIO MATT 60X120cm - 48''× 24'' • Wall .
QUARTZITE - SAND
MATT
60X120cm - 48''× 24''






• Floor . QUARTZITE - NERO MATT 60X120cm - 48''× 24''



• Floor . QUARTZITE - NERO MATT 60X120cm - 48''× 24''




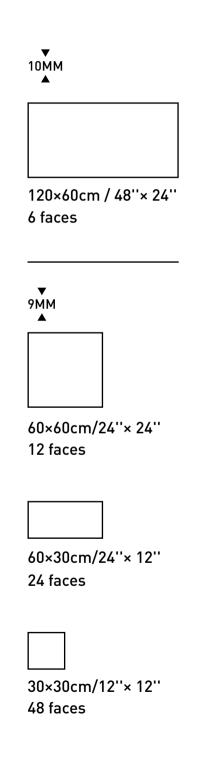







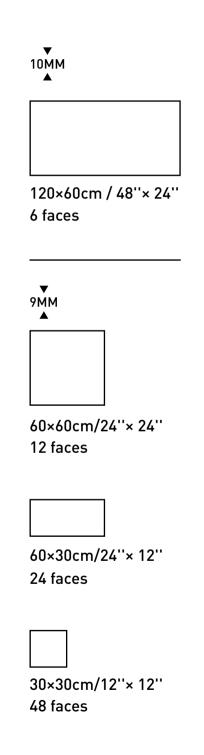









QUARTZITE SAND PRODUCT INFORMATION

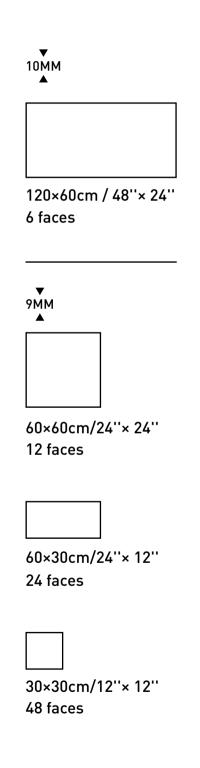




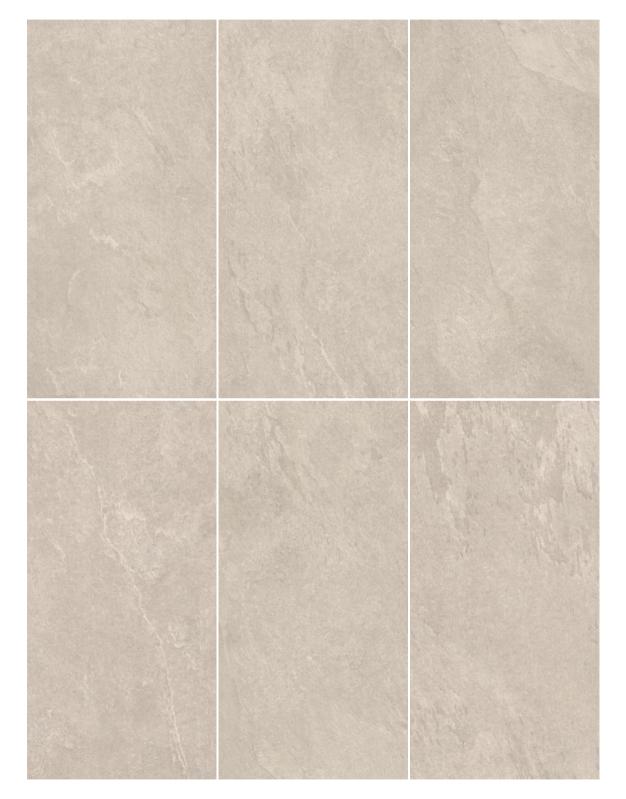




QUARTZITE GRIGIO
PRODUCT INFORMATION

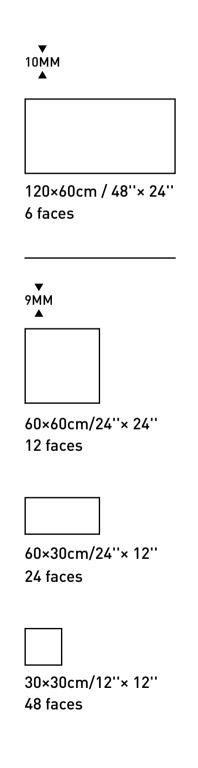





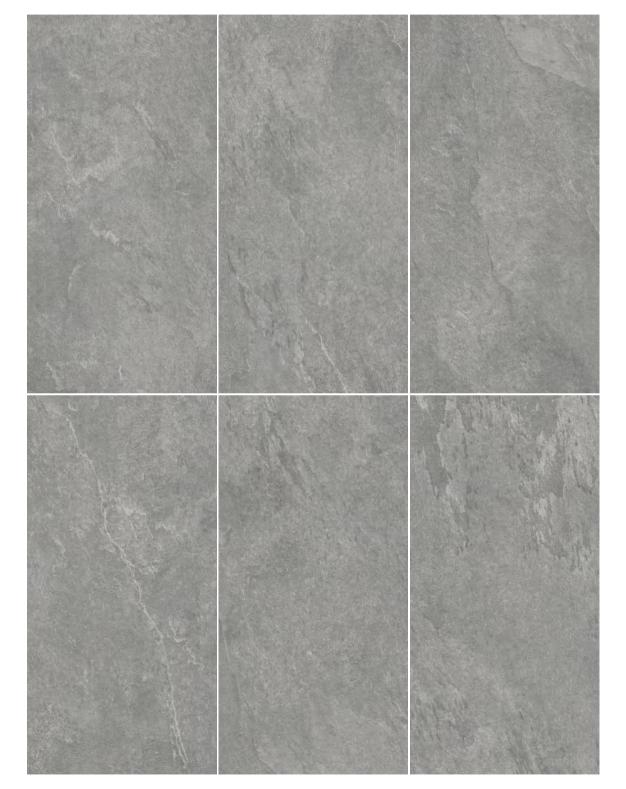



QUARTZITE NERO PRODUCT INFORMATION

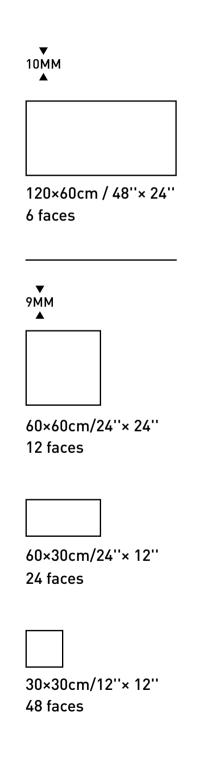

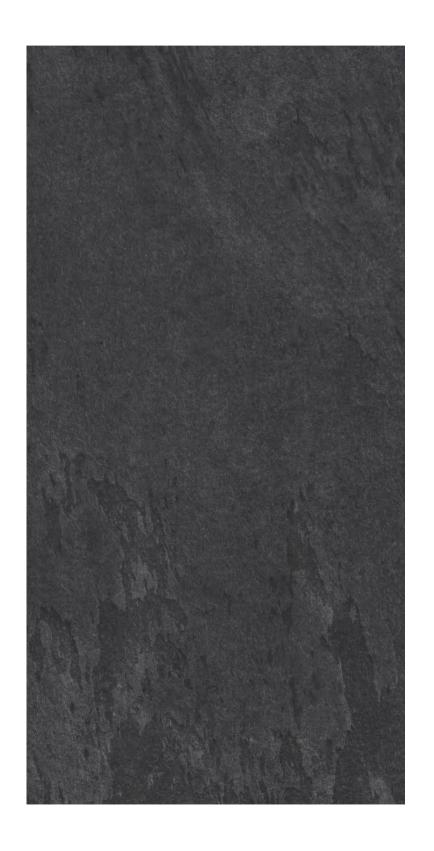









### **TECHNICAL SPECIFICATIONS**


TECHNICAL CHARACTERISTIC	STANDARD TEST METHOD	ISO STANDARD REQUIREMENT	OUR VALUES	
Length & Width	ISO 10545-2	±0.6%Max	±0.3%Max	
Thickness	ISO 10545-2	±5.0%Max	±5.0%Max	
Sides Straightness	ISO 10545-2	±5.0%Max	±0.25%Max	
Rectangularity	ISO 10545-2	±0.5%Max	±0.25%Max	
Flatness: a) Centre Curvature b) Edge Curvature c) Warpage	ISO 10545-2 ISO 10545-2 ISO 10545-2	±0.5%Max ±0.5%Max ±0.5%Max	±0.2%Max/Max2.0mm ±0.2%Max/Max2.0mm ±0.2%Max/Max2.0mm	
Surface Quality	ISO 10545-2	≥ 95%FREE From visible defect	Comply	
Water Absorption	ISO 10545-3 ≤ 0.5%		≤ 0.20%	
Breaking Strength	ISO 10545-4	≥ 1300N	≥ 1300N	
Modulus Of Rupture	ISO 10545-4	≥ 35N/mm² Individual ≥ 32N/mm²	≥ 35N/mm² Individual ≥ 32N/mm²	
Abrasion Resistance a) Deep Abrasion For Unglazed Tiles b) Surfaces Abrasion For Glazed Tiles	ISO 10545-6 ISO 10545-7	≤ 175mm³ Manuf.to state abrasion class,cycie and passed	≤ 160mm³ ≥ PEI 3 ( Dependent On Product Type )	
Crazing Test ( glazed Tiles )	ISO 10545-11	No Sign Of Crazing	No Sign Of Crazing	
Frost Resistance	ISO 10545-12	Required	No Visible Crack	
Chemical Resistance a) low concentrations b) household chemicais and Swimming pool salts	ISO 10545-13 ISO 10545-13	Manuf. to state ≥ class B	Class A Class B(For Polished Tiles) Class A Class B(For Polished Tiles)	
Stain Resistance a) for unglazed tiles b) for glazed tiles	ISO 10545-14 ISO 10545-14	Manuf. to state ≥ class 3	≥ Class 3 ≥ Class 3	
Slip Resistance ( Excluding Polished, Lappato And Satin Finishing )	AS/NZS 4586 App.A	Manuf. to state	Wet Pendulum ≥ P4 ( Dependent On Product Type )	

## **PACKING SPECIFICATIONS**

SERIES	SIZES	PCS/CTN	m²/CTN	KG/CTN	m²/PLT	KG/PLT	CTN/PLT
QUARTZITE	60x120 / 24"x48"	2	1.44	32	97.92	2176	68
	60x60 / 24"x24"	4	1.44	30	57.60	1200	40
	30x60 / 12"x24"	8	1.44	30	57.60	1200	40
	30x30 / 12"x12"	16	1.44	30	57.60	1200	40













Foshan Casagres International Co, Ltd. info@casagresintl.com www.casagresintl.com