

# ARIA





# ARIA

Where Stone Meets Symphony.

Introducing ARIA, a tile collection that transcends the ordinary, harmonizing the raw, timeless beauty of natural stone with a contemporary artistic vision. ARIA is more than a surface; it's an expression of style, designed for those who listen to the whispers of trends and respond with bold, elegant choices.

ARIA draws its inspiration from the dramatic veins and delicate textures of the world's most coveted marbles. Each tile is a unique canvas, where nature's artistry is captured with breathtaking fidelity. The swirling patterns and soft, organic color palettes are not merely printed but masterfully crafted to tell a story of geological wonder, bringing a piece of art into your everyday space.

Understanding that light and feel define a room's soul, ARIA offers a choice of two distinct personalities:

**The Matt Finish:** For those who champion understated luxury and modern sophistication. The micro-matte surface provides a soft, tactile experience, absorbing light to create a serene, elegant ambiance. It's the perfect choice for creating calming retreats and minimalist spaces where texture takes center stage.

**The Glossy Finish:** For moments that demand drama and brilliance. The luminous surface captures and reflects light, amplifying the depth of the stone's veins and making spaces feel more expansive and vibrant. It's a celebration of classic glamour and timeless appeal.



# ARIA

| Matt | Polished |

## 4 COLOURS



BIANCO



CREAM




GRIGIO




NOTTE

## 4 SIZES



120×60cm  
48"× 24"



60×60cm  
24"× 24"



60×30cm  
24"× 12"



30×30cm  
12"× 12"

**10mm**  
120×60cm 48"× 24"

**9mm**  
60×60cm 24"× 24"  
60×30cm 24"× 12"  
30×30cm 12"× 12"



• Floor .  
ARIA - GRIGIO  
MATT  
60X60cm - 24" x 24"

• Wall .  
ARIA - CREMA  
MATT  
60X60cm - 24" x 24"



- Floor .  
ARIA - GRIGIO  
MATT  
60X60cm - 24"× 24"



- Wall .  
ARIA - CREMA  
MATT  
60X60cm - 24"× 24"





• Floor .  
ARIA - NOTTE  
MATT  
60X60cm - 24" x 24"

ARIA

BIACNO

PRODUCT INFORMATION

▼

10MM

▲

120×60cm / 48"× 24"

6 faces

▼

9MM

▲

60×60cm/24"× 24"

12 faces

60×30cm/24"× 12"

24 faces

30×30cm/12"× 12"


48 faces

- ✓

Matt

✓

Polished

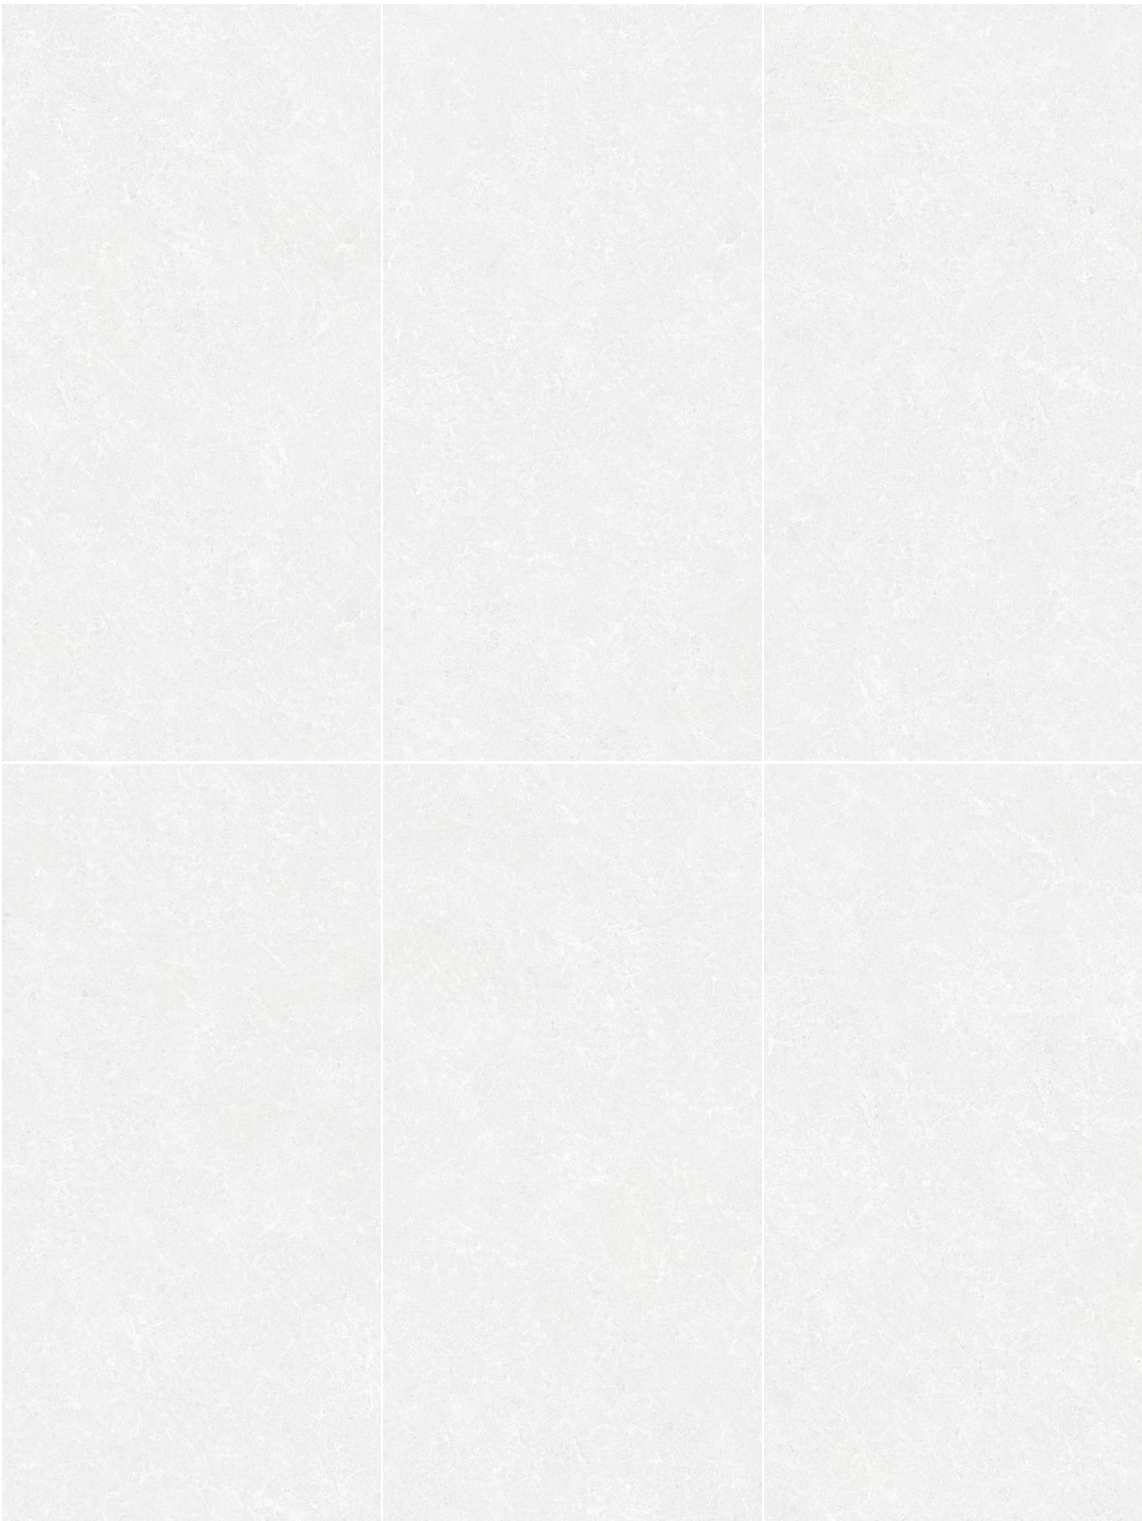

# ARIA CREMA

## PRODUCT INFORMATION

▼

10MM

▲

120×60cm / 48"× 24"

6 faces

▼

9MM

▲

60×60cm/24"× 24"

12 faces

60×30cm/24"× 12"

24 faces


30×30cm/12"× 12"

48 faces

- ☒

Matt
- ☒

Polished

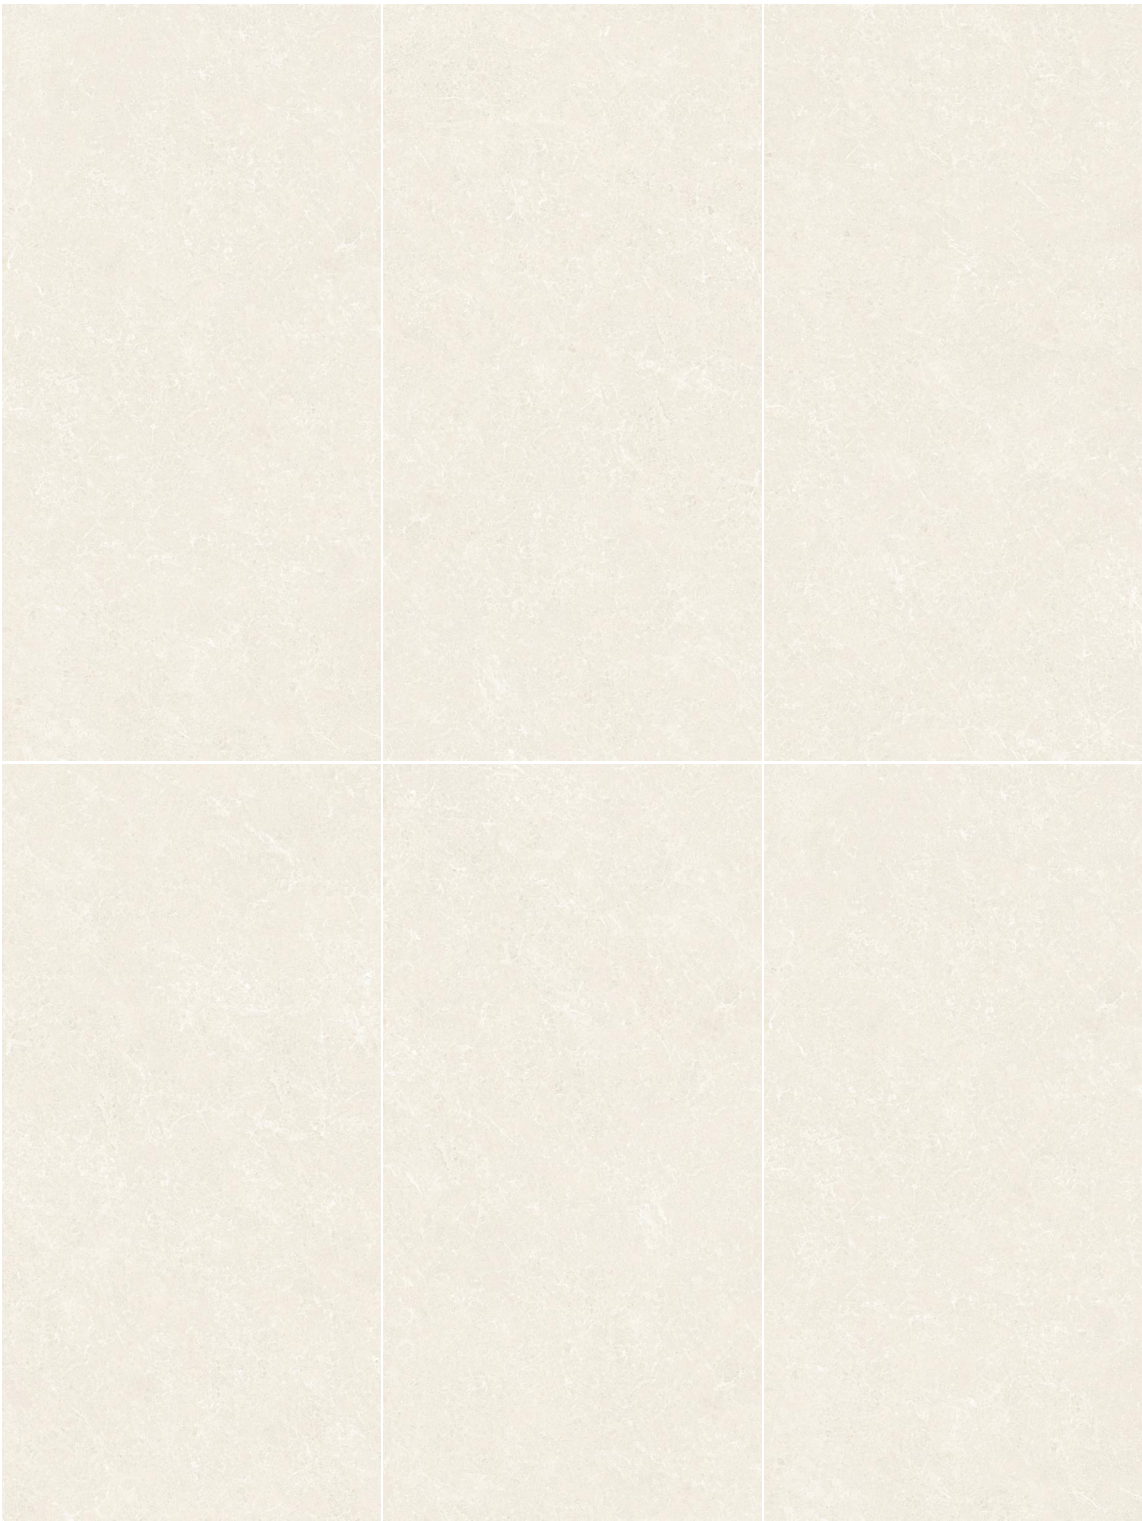

ARIA GRIGIO

PRODUCT INFORMATION

▼

10MM

▲

120×60cm / 48"× 24"

6 faces

▼

9MM

▲

60×60cm/24"× 24"

12 faces

60×30cm/24"× 12"

24 faces

30×30cm/12"× 12"

48 faces

- ☒ Matt

☒ Polished



ARIA

NOTTE

PRODUCT INFORMATION

▼

10MM

▲

120×60cm / 48"× 24"

6 faces

▼

9MM

▲

60×60cm/24"× 24"

12 faces

60×30cm/24"× 12"

24 faces

30×30cm/12"× 12"

48 faces

- ☒

Matt
- ☒

Polished




# TECHNICAL SPECIFICATIONS

| TECHNICAL CHARACTERISTIC                                                                            | STANDARD TEST METHOD                      | ISO STANDARD REQUIREMENT                                                  | OUR VALUES                                                                       |
|-----------------------------------------------------------------------------------------------------|-------------------------------------------|---------------------------------------------------------------------------|----------------------------------------------------------------------------------|
| Length & Width                                                                                      | ISO 10545-2                               | ±0.6%Max                                                                  | ±0.3%Max                                                                         |
| Thickness                                                                                           | ISO 10545-2                               | ±5.0%Max                                                                  | ±5.0%Max                                                                         |
| Sides Straightness                                                                                  | ISO 10545-2                               | ±5.0%Max                                                                  | ±0.25%Max                                                                        |
| Rectangularity                                                                                      | ISO 10545-2                               | ±0.5%Max                                                                  | ±0.25%Max                                                                        |
| Flatness: a) Centre Curvature<br>b) Edge Curvature<br>c) Warpage                                    | ISO 10545-2<br>ISO 10545-2<br>ISO 10545-2 | ±0.5%Max<br>±0.5%Max<br>±0.5%Max                                          | ±0.2%Max/Max2.0mm<br>±0.2%Max/Max2.0mm<br>±0.2%Max/Max2.0mm                      |
| Surface Quality                                                                                     | ISO 10545-2                               | ≥ 95%FREE<br>From visible defect                                          | Comply                                                                           |
| Water Absorption                                                                                    | ISO 10545-3                               | ≤ 0.5%                                                                    | ≤ 0.20%                                                                          |
| Breaking Strength                                                                                   | ISO 10545-4                               | ≥ 1300N                                                                   | ≥ 1300N                                                                          |
| Modulus Of Rupture                                                                                  | ISO 10545-4                               | ≥ 35N/mm <sup>2</sup><br>Individual ≥ 32N/mm <sup>2</sup>                 | ≥ 35N/mm <sup>2</sup><br>Individual ≥ 32N/mm <sup>2</sup>                        |
| Abrasion Resistance<br>a) Deep Abrasion For Unglazed Tiles<br>b) Surfaces Abrasion For Glazed Tiles | ISO 10545-6<br>ISO 10545-7                | ≤ 175mm <sup>3</sup><br>Manuf.to state abrasion<br>class,cycie and passed | ≤ 160mm <sup>3</sup><br>≥ PEI 3<br>( Dependent On Product Type )                 |
| Crazing Test ( glazed Tiles )                                                                       | ISO 10545-11                              | No Sign Of Crazing                                                        | No Sign Of Crazing                                                               |
| Frost Resistance                                                                                    | ISO 10545-12                              | Required                                                                  | No Visible Crack                                                                 |
| Chemical Resistance<br>a) low concentrations<br>b) household chemicalais and<br>Swimming pool salts | ISO 10545-13<br>ISO 10545-13              | Manuf. to state<br>≥ class B                                              | Class A<br>Class B(For Polished Tiles)<br>Class A<br>Class B(For Polished Tiles) |
| Stain Resistance<br>a) for unglazed tiles<br>b) for glazed tiles                                    | ISO 10545-14<br>ISO 10545-14              | Manuf. to state<br>≥ class 3                                              | ≥ Class 3<br>≥ Class 3                                                           |
| Slip Resistance<br>( Excluding Polished, Lappato<br>And Satin Finishing )                           | AS/NZS 4586 App.A                         | Manuf. to state                                                           | Wet Pendulum ≥ P4<br>( Dependent On Product Type )                               |



# PACKING SPECIFICATIONS


| SERIES | SIZES            | PCS/CTN | m <sup>2</sup> /CTN | KG/CTN | m <sup>2</sup> /PLT | KG/PLT | CTN/PLT |
|--------|------------------|---------|---------------------|--------|---------------------|--------|---------|
| ARIA   | 60x120 / 24"x48" | 2       | 1.44                | 32     | 97.92               | 2176   | 68      |
|        | 60x60 / 24"x24"  | 4       | 1.44                | 30     | 57.60               | 1200   | 40      |
|        | 30x60 / 12"x24"  | 8       | 1.44                | 30     | 57.60               | 1200   | 40      |
|        | 30x30 / 12"x12"  | 16      | 1.44                | 30     | 57.60               | 1200   | 40      |




UNIFORM  
VARIATION  
**V1**



SLIGHT  
VARIATION  
**V2**



MODERATE  
VARIATION  
**V3**



SUBSTANTIAL  
VARIATION  
**V4**

Foshan Casagres International Co, Ltd.  
info@casagresintl.com  
www.casagresintl.com