

# ARMANI



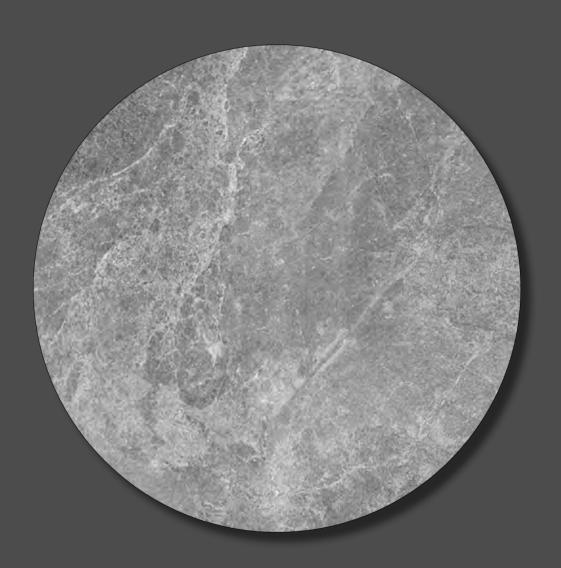

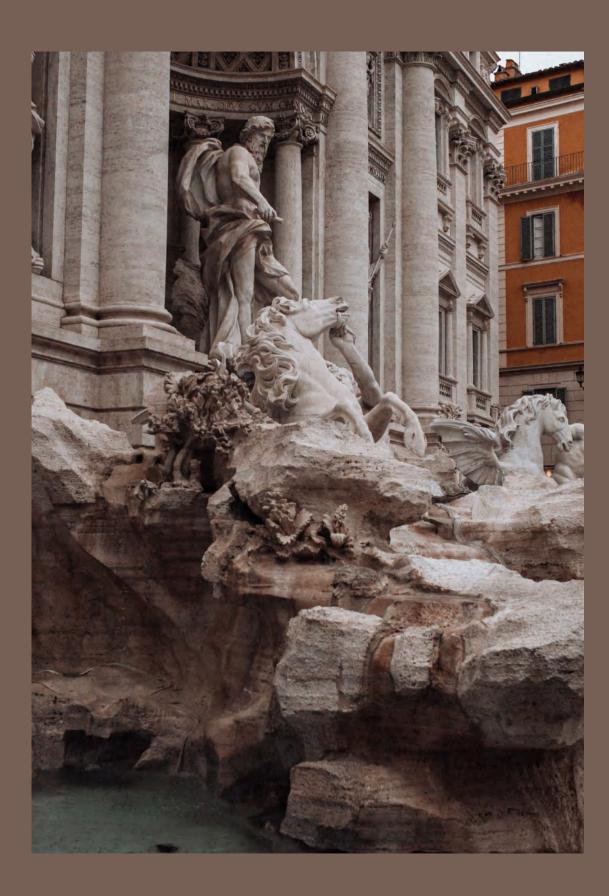

### **ARMANI**

Where Timeless Elegance Meets Modern Design.

Inspired by the essence of high fashion and contemporary aesthetics, ARMANI redefine luxury surfaces with a perfect fusion of sophistication and innovation.

ARMANI draw inspiration from global design trends and the iconic minimalism of the Armani brand, offering a sleek, polished finish that complements both residential and commercial spaces.

Neutral tones, bold veining, and subtle metallic accents create a canvas for timeless elegance, effortlessly aligning with avant-garde architecture or classic decor.

Utilizing cutting-edge digital printing technology, every tile replicates the depth and authenticity of natural stone, ensuring no two pieces are identical.

Eco-conscious production processes ensure minimal environmental impact, without compromising on quality or aesthetics. ARMANI are not just surfaces—they are a statement of refined taste, designed to transform spaces into enduring works of art.






## **ARMANI**

Matt | Lappato |

#### 4 COLOURS



#### 4 SIZES

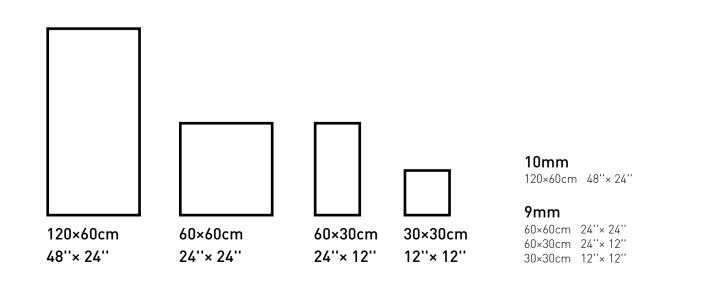






• Floor . ARMANI – ASH MATT 60X120cm – 48''× 24'' • Floor . ARMANI - GRIGIO MATT 60X120cm - 48''× 24''

• Wall . VOGUE WOOD - SAND MATT 20X120cm - 16"× 24"




▼ 10MM ▲
120×60cm / 48''× 24'' 6 faces
<b>▼</b> 9MM <b>▲</b>
60×60cm/24''× 24'' 12 faces
60×30cm/24''× 12'' 24 faces
30×30cm/12''× 12'' 48 faces

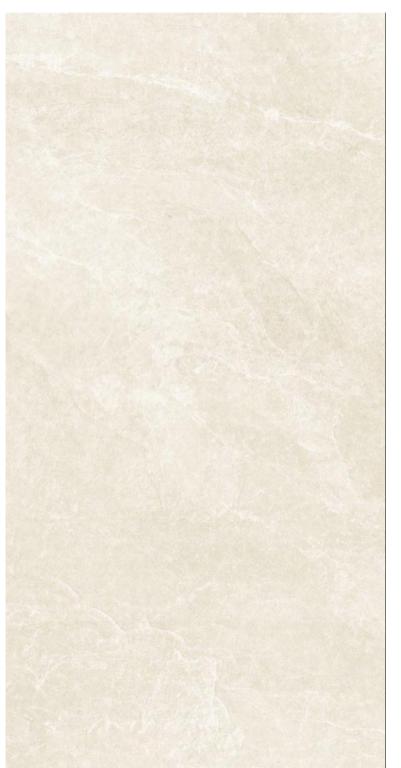







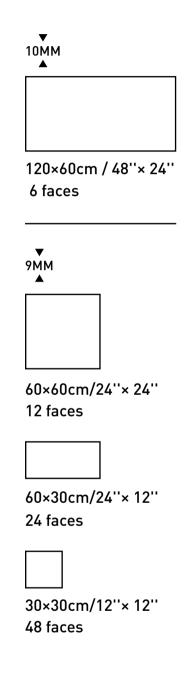











<b>▼</b> 10MM
120×60cm / 48''× 24'' 6 faces
<b>▼</b> 9MM <b>▲</b>
60×60cm/24''× 24'' 12 faces
60×30cm/24''× 12'' 24 faces
30×30cm/12''× 12'' 48 faces









✓ Matt



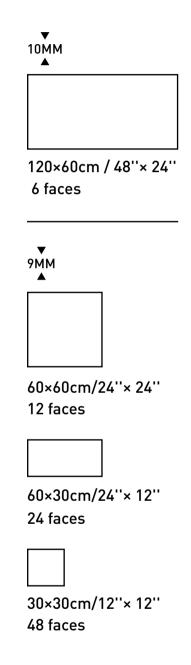

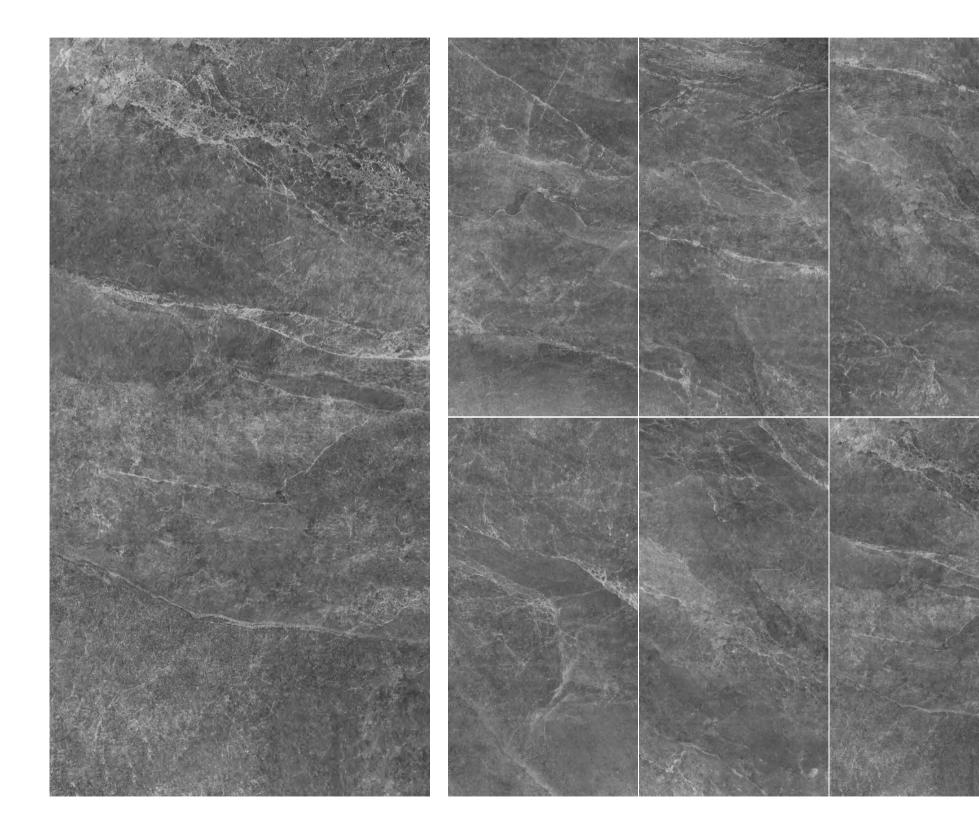








## **TECHNICAL SPECIFICATIONS**

TECHNICAL CHARACTERISTIC	STANDARD TEST METHOD	ISO STANDARD REQUIREMENT	OUR VALUES	
Length & Width	ISO 10545-2	±0.6%MAX	±0.30%Max	
Thickness	ISO 10545-2	±5.0%MAX	±5.0%Max	
Sides Straightness	ISO 10545-2	±5%MAX	±0.25%Max	
Rectangularity	ISO 10545-2	±0.5%MAX	±0.25%Max	
Flatness : a) Centre Curvature	ISO 10545-2	±0.5%MAX	±0.20%Max/Max2.0mm	
b) Edge Curvature	ISO 10545-2	$\pm$ 0.5%MAX	±0.20%Max/Max2.0mm	
c) Warpage	ISO 10545-2	$\pm$ 0.5%MAX	±0.20%Max/Max2.0mm	
Surface Quality	ISO 10545-2	≥95%FREE From visible defect	Comply	
Water Absorption	ISO 10545-3	≤0.5%	≤0.20%	
Breaking Strength	ISO 10545-4	≥1300N	≥1300N	
Modulus Of Rupture	ISO 10545-4	≥35N/mm² Individual ≥32N/mm²	≥35N/mm² Individual ≥32N/mm²	
Abrasion Resistance a) Deep Abrasion For Unglazed Tiles b) Surfaces Abrasion For Glazed Tiles	ISO 10545-6 ISO 10545-7	≤175mm³ Manuf.to state abrasion class, cycie and passed	≤160mm³ ≥PEI 3 (Dependent On Product Type)	
Crazing Test (glazed Tiles)	ISO 10545-11	No Sign Of Crazing	No Sign Of Crazing	
Frost Resistance	ISO 10545-12	Required	No Visible Crack	
Chemical Resistance a) low concentrations b) household chemicais and Swimming pool salts	ISO 10545-13 ISO 10545-13	Manuf. to state ≥class B	Class A Class B(For Polished Tiles) Class A Class B(For Polished Tiles)	
Stain Resistance a) for unglazed tiles b) for glazed tiles	ISO 10545-14 ISO 10545-14	Manuf. to state ≥class 3	≽Class 3 ≽Class 3	
Slip Resistance (Excluding Polished,Lappato And Satin Finishing)	AS/NZS 4586 App.A	Manuf. to state	Wet Pendulum≥P4 (Dependent On Product Type)	

## **PACKING SPECIFICATIONS**


SERIES	SIZES	PCS/CTN	m²/CTN	KG/CTN	m²/PLT	KG/PLT	CTN/PLT
ARMANI	60x120/24"x48"	2	1.44	32	80.64	1792	56
	60x60/24"x24"	4	1.44	30	57.60	1200	40
	30x60/12"x24"	8	1.44	30	57.60	1200	40
	30x30/12"x12"	11	0.99	21	55.44	1176	56



UNIFORM VARIATION



**SLIGHT** VARIATION





SUBSTANTIAL VARIATION





Foshan Casagres International Co, Ltd. info@casagresintl.com www.casagresintl.com