BABYLON



CASAGRES



BABYLON

BABYLON, a masterpiece of ceramic craftsmanship that seamlessly marries artistry with functionality. Available in both polished and matt finishes, these exquisite tiles offer a palette of 4 sophisticated hues, each designed to complement the most discerning of tastes.

The subtle play of micro stone veins across their surfaces adds a dimension of depth and texture, evoking the timeless beauty of natural stone.

From an artistic perspective, BABYLON tiles are not merely surfaces; they are canvases. Their micro stone patterns whisper tales of geological epochs, inviting the viewer to explore the intricate dance of light and shadow across their planes.

Whether polished or matt, these tiles reflect the artist's touch, transforming walls and floors into expressions of creativity and style.

CASAGRES

BABYLON


| Sliptech | Polished |

4 COLOURS



CHALK CREAM SILVER CARBON

4 SIZES

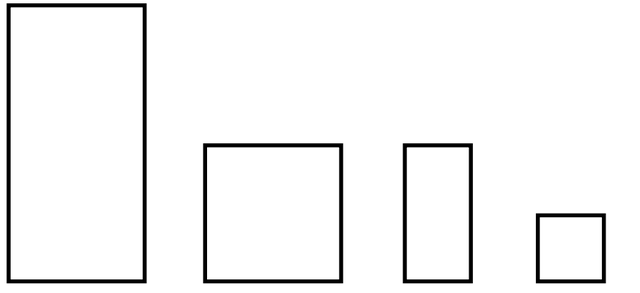

120×60cm
48''× 24''

60×60cm
24''× 24''

60×30cm
24''× 12''

30×30cm
12''× 12''

10mm
120×60cm 48''× 24''

9mm
60×60cm 24''× 24''
60×30cm 24''× 12''
30×30cm 12''× 12''

2 FINISHES



▼ Sliptech

The soft-touch satin-finish surfaces are ideal for all interior applications as well as for new and surprising stylistic combinations.



▲ Polished

POLISHED lends elegance and style to floors and walls, allowing for enormous creativity in terms of installation patterns and colour combinations.



CHALK

BABYLON CHALK embody a rich cultural heritage and exquisite artistic craftsmanship, drawing inspiration from ancient civilizations like the Hanging Gardens of Babylon, symbolizing humanity's pursuit and longing for a beautiful life.



• Wall .
BABYLON – CHALK
SLIPTECH
60X120cm – 48''× 24''



• Wall .
BABYLON – CHALK
SLIPTECH
60X120cm – **48''× 24''**





• Wall .
BABYLON – CHALK
SLIPTECH
60X120cm – **48''× 24''**




CREAM

BABYLON CREAM is aim at providing the high end market segment unique ideal spaces with home atmosphere.



- Wall .
  BABYLON - CREAM
  SLIPTECH
  60X120cm - 48''× 24''

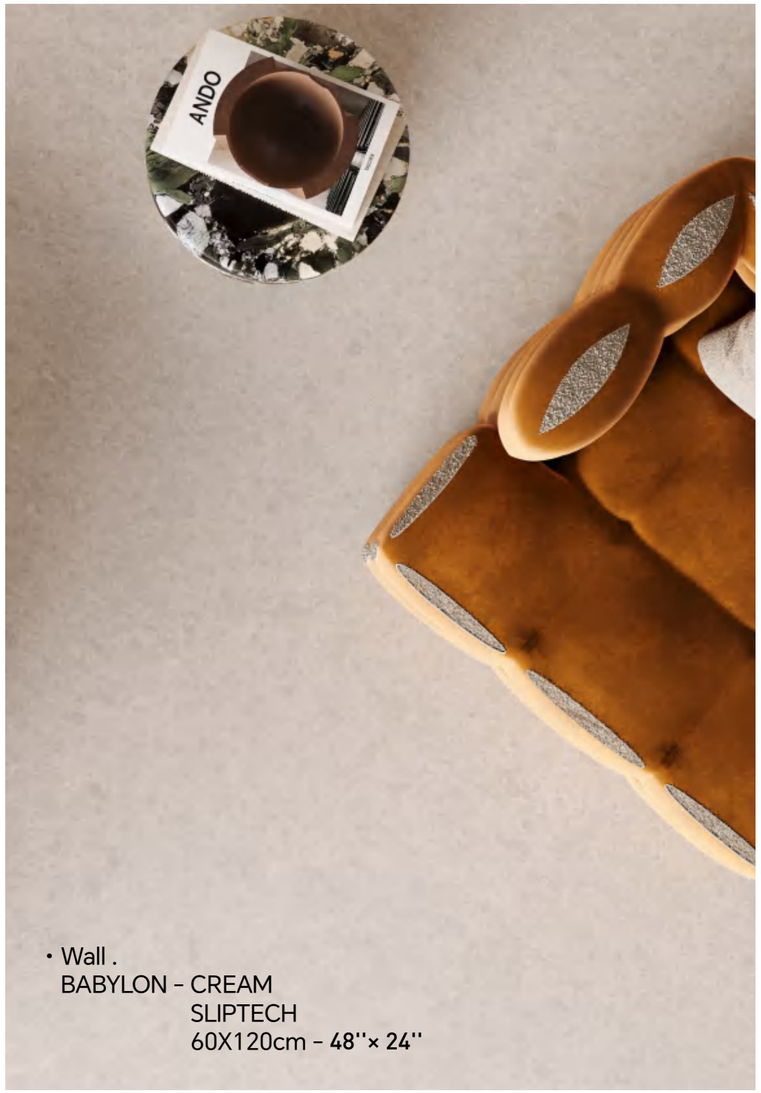

• Wall .
BABYLON – CREAM
SLIPTECH
60X120cm – 48''× 24''

• Floor .
BABYLON – CREAM
POLISHED
60X120cm – 48''× 24''




SILVER

BABYLON SILVER blending tradition with modernity to create a unique visual aesthetic and cultural resonance.





- Floor .
  BABYLON – SILVER
  SLIPTECH
  120X60cm – **48''× 24''**

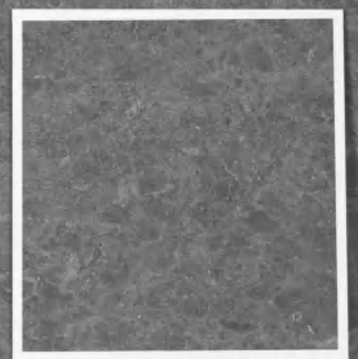

CASAGRES

CARBON

BABYLON CARBON tiles are used not just for flooring and wall decor but also serve as a medium for designers to create distinctive works of art.



- Floor .
  BABYLON – CARBON
  SLIPTECH
  60X120cm – **48''× 24''**

BABYLON CHALK

10MM

120×60cm / 48''× 24''
8 faces

9MM

60×60cm/24''× 24''
16 faces

60×30cm/24''× 12''
32 faces

30×30cm/12''× 12''
64 faces

V2

- [x] Sliptech
- [x] Polished

BABYLON CREAM

10MM

120×60cm / 48''× 24''
8 faces

9MM

60×60cm/24''× 24''
16 faces

60×30cm/24''× 12''
32 faces

30×30cm/12''× 12''
64 faces

V2

Sliptech
Polished





BABYLON SILVER

10MM

120×60cm / 48''× 24''
8 faces

9MM

60×60cm/24''× 24''
16 faces

60×30cm/24''× 12''
32 faces

30×30cm/12''× 12''
64 faces

V2

Sliptech
Polished





BABYLON CARBON

10MM

120×60cm / 48''× 24''
8 faces

9MM


60×60cm/24''× 24''
16 faces


60×30cm/24''× 12''
32 faces

30×30cm/12''× 12''
64 faces

V2

Sliptech
Polished

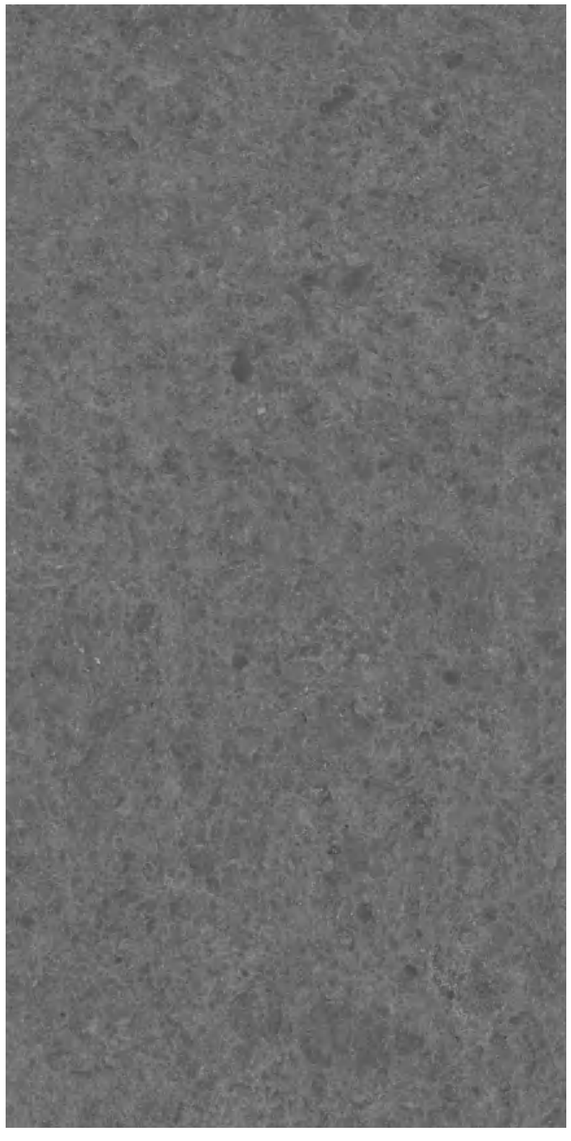

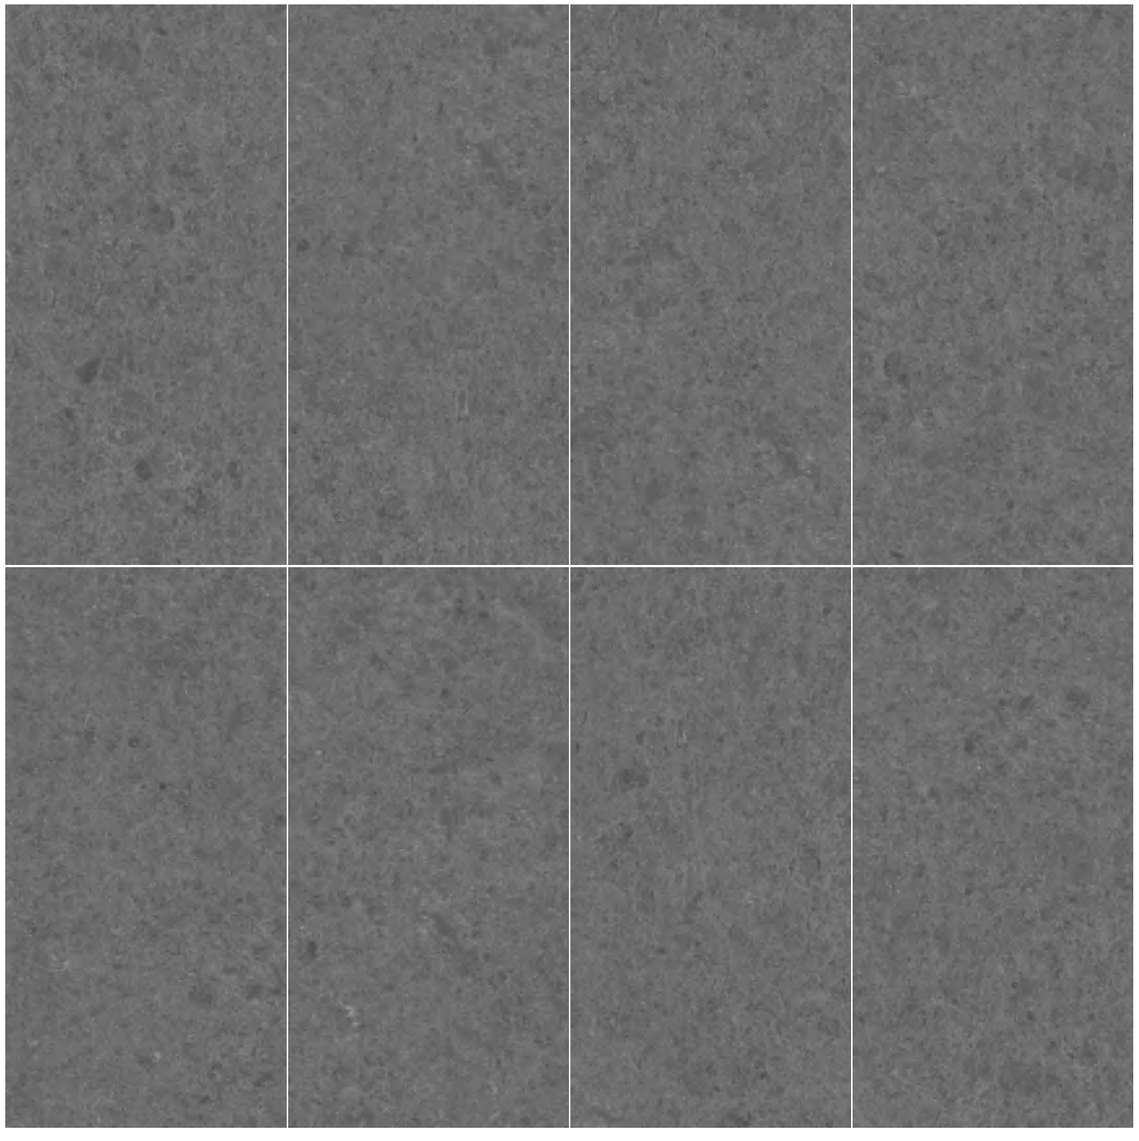

TECHNICAL SPECIFICATIONS

TECHNICAL CHARACTERISTIC	STANDARD TEST METHOD	ISO STANDARD REQUIREMENT	OUR VALUES
Length & Width	ISO 10545-2	±0.6%Max	±0.3%Max
Thickness	ISO 10545-2	±5.0%Max	±5.0%Max
Sides Straightness	ISO 10545-2	±5.0%Max	±0.25%Max
Rectangularity	ISO 10545-2	±0.5%Max	±0.25%Max
Flatness: a) Centre Curvature b) Edge Curvature c) Warpage	ISO 10545-2 ISO 10545-2 ISO 10545-2	±0.5%Max ±0.5%Max ±0.5%Max	±0.2%Max/Max2.0mm ±0.2%Max/Max2.0mm ±0.2%Max/Max2.0mm
Surface Quality	ISO 10545-2	≥ 95%FREE From visible defect	Comply
Water Absorption	ISO 10545-3	≤ 0.5%	≤ 0.20%
Breaking Strength	ISO 10545-4	≥ 1300N	≥ 1300N
Modulus Of Rupture	ISO 10545-4	≥ 35N/mm² Individual ≥ 32N/mm²	≥ 35N/mm² Individual ≥ 32N/mm²
Abrasion Resistance a) Deep Abrasion For Unglazed Tiles b) Surfaces Abrasion For Glazed Tiles	ISO 10545-6 ISO 10545-7	≤ 175mm³ Manuf.to state abrasion class,cycie and passed	≤ 160mm³ ≥ PEI 3 (Dependent On Product Type)
Crazing Test (glazed Tiles)	ISO 10545-11	No Sign Of Crazing	No Sign Of Crazing
Frost Resistance	ISO 10545-12	Required	No Visible Crack
Chemical Resistance a) low concentrations b) household chemicais and Swimming pool salts	ISO 10545-13 ISO 10545-13	Manuf. to state ≥ class B	Class A Class B(For Polished Tiles) Class A Class B(For Polished Tiles)
Stain Resistance a) for unglazed tiles b) for glazed tiles	ISO 10545-14 ISO 10545-14	Manuf. to state ≥ class 3	≥ Class 3 ≥ Class 3
Slip Resistance (Excluding Polished, Lappato And Satin Finishing)	AS/NZS 4586 App.A	Manuf. to state	Wet Pendulum ≥ P4 (Dependent On Product Type)

PACKING SPECIFICATIONS

SERIES	SIZES	PCS/CTN	m²/CTN	KG/CTN	m²/PLT	KG/PLT	CTN/PLT
BABYLON	60x120 / 24"x48"	2	1.44	32	97.92	2176	68
	60x60 / 24"x24"	4	1.44	30	57.60	1200	40
	30x60 / 12"x24"	8	1.44	30	57.60	1200	40
	30x30 / 12"x12"	16	1.44	30	57.60	1200	40



UNIFORM VARIATION

V1



SLIGHT VARIATION

V2



MODERATE VARIATION

V3



SUBSTANTIAL VARIATION

V4

CASAGRES

Foshan Casagres International Co, Ltd.
info@casagresintl.com
www.casagresintl.com