

BALI



BALI

| Matt | Lappato |

4 COLOURS



OYSTER



SAND




PEARL




SHALE

4 SIZES



120×60cm
48"× 24"



60×60cm
24"× 24"



60×30cm
24"× 12"




30×30cm
12"× 12"

10mm

120×60cm 48"× 24"

9mm

60×60cm 24"× 24"
60×30cm 24"× 12"
30×30cm 12"× 12"

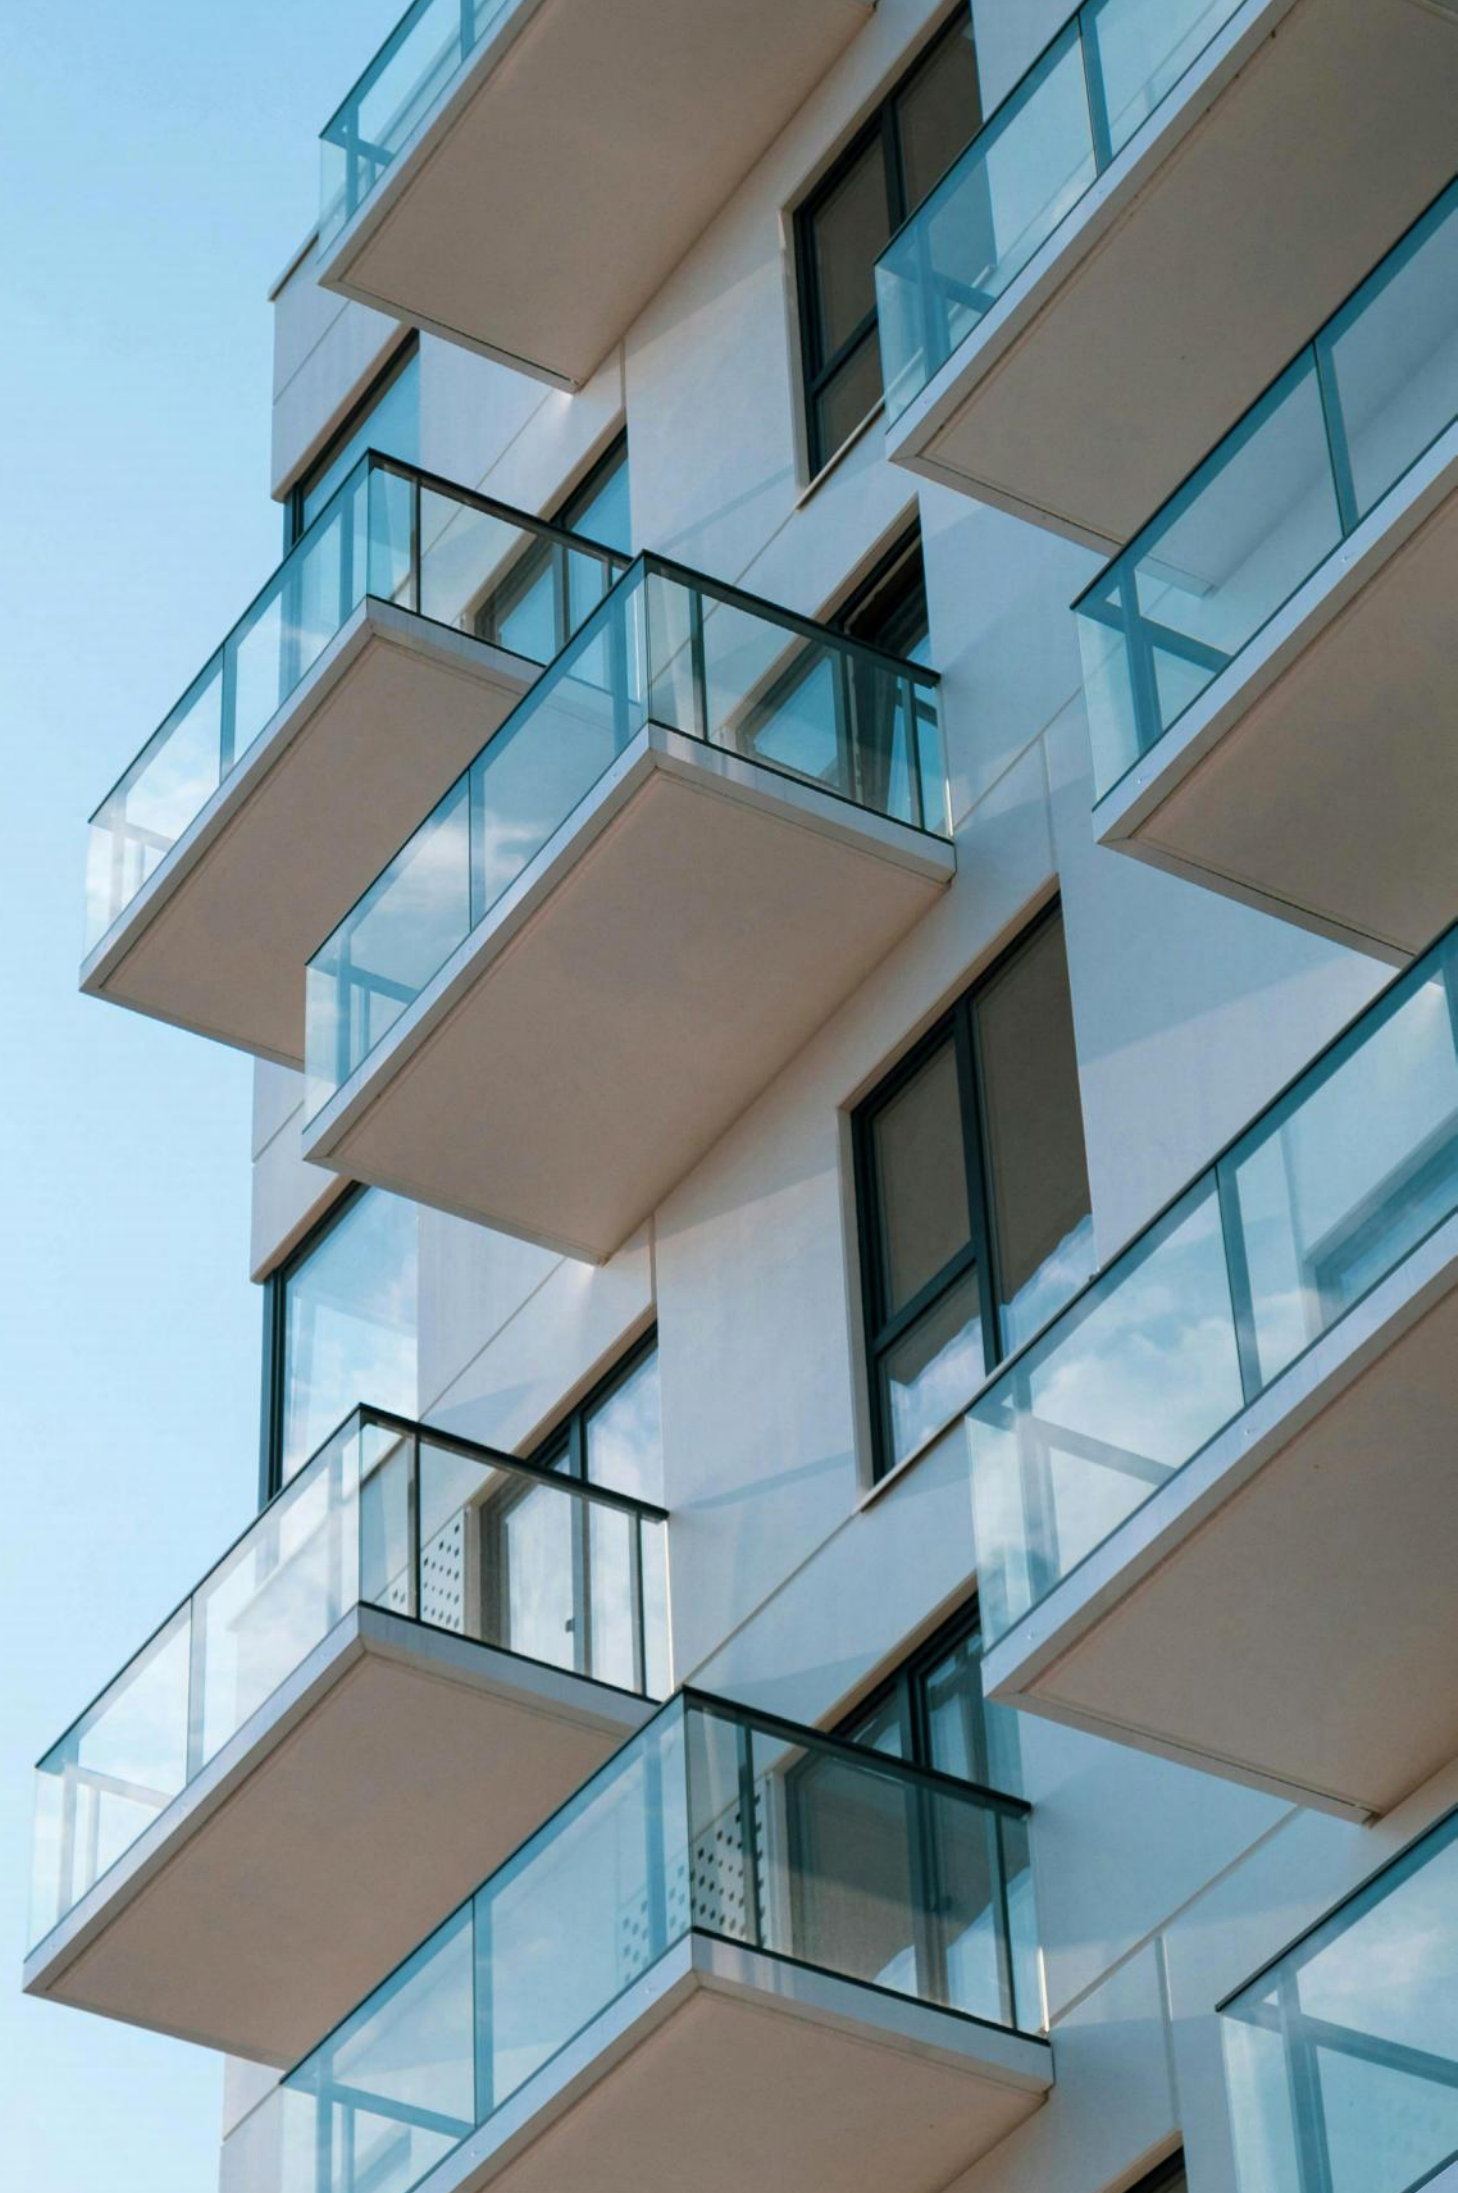



• Floor .
BALI - SAND
MATT
60X60cm - 24" x 24"



- Floor .
BALI - SAND
MATT
60X60cm - 24" x 24"

- Wall .
BALI - OYSTER
MATT
120X60cm - 48" x 24"



- Floor .
BALI - SHALE
MATT
120X60cm - 48" x 24"



- Floor .
BALI - SHALE
MATT
120X60cm - 48" x 24"

BALI

OYSTER

PRODUCT INFORMATION

▼

▲

10MM

120×60cm / 48"× 24"

10 faces

▼

▲

9MM

60×60cm/24"× 24"

20 faces

60×30cm/24"× 12"

40 faces

30×30cm/12"× 12"

80 faces



V2

☒ Matt

☒ Lappato

BALI SAND

PRODUCT INFORMATION

10MM

120×60cm / 48"× 24"

10 faces

9MM

60×60cm/24"× 24"


20 faces

60×30cm/24"× 12"

40 faces

30×30cm/12"× 12"

80 faces

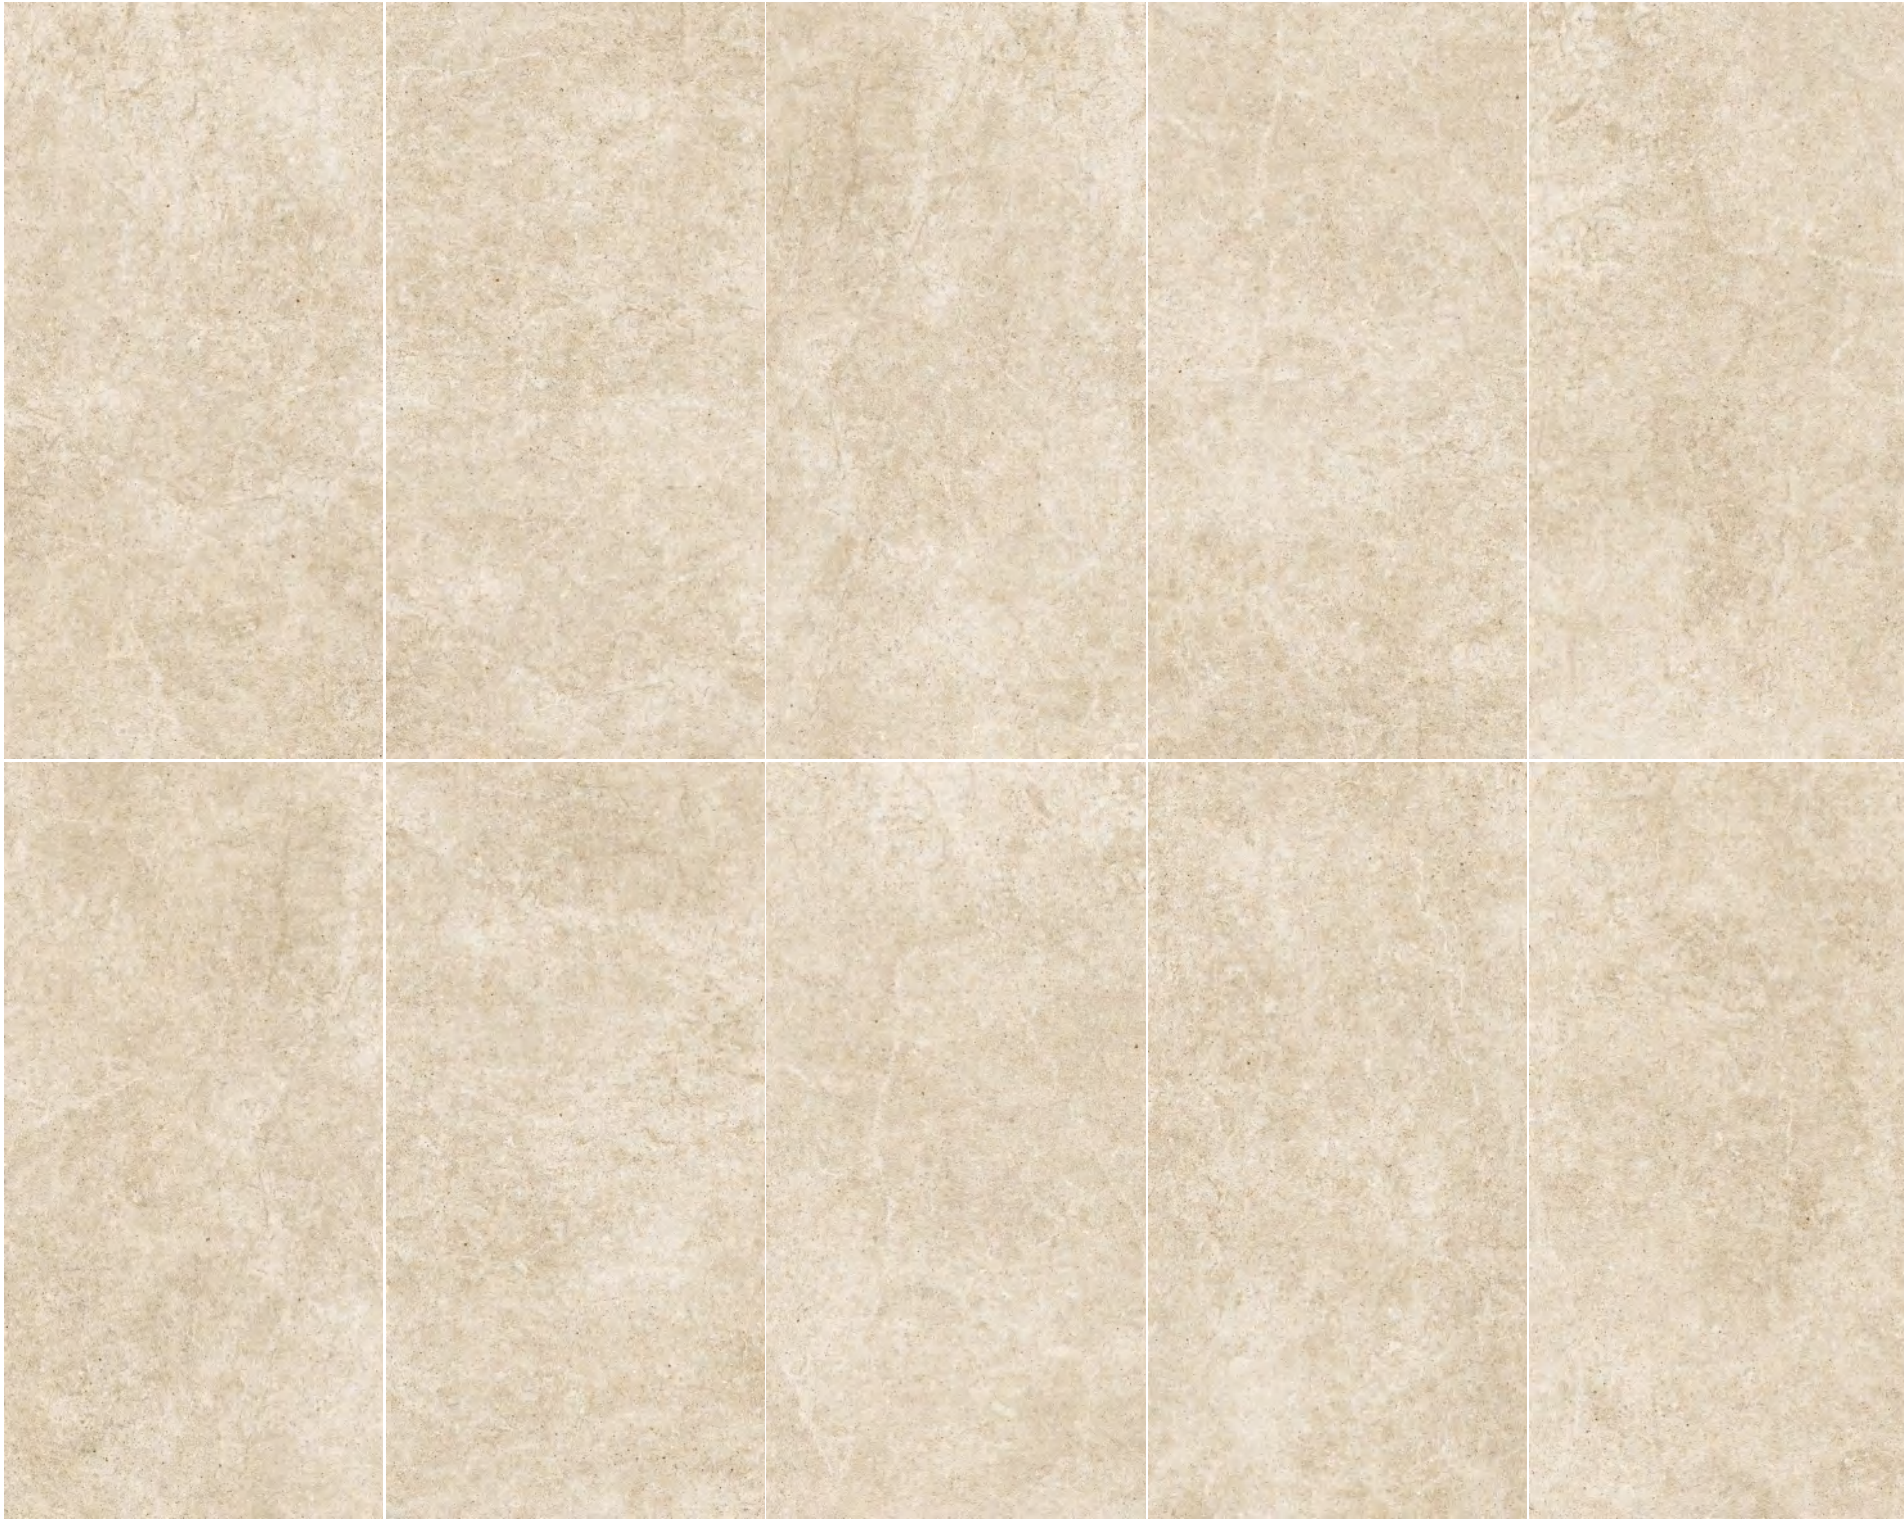

V2

- ☒ Matt
- ☒ Lappato

BALI

PEARL

PRODUCT INFORMATION

▼

▲

10MM

120×60cm / 48"× 24"

10 faces

▼

▲

9MM

60×60cm/24"× 24"

20 faces

60×30cm/24"× 12"

40 faces

30×30cm/12"× 12"

80 faces



V2

- ☒

Matt
- ☒

Lappato

BALI

SHALE

PRODUCT INFORMATION

▼

▲

10MM

120×60cm / 48"× 24"

10 faces

▼

▲

9MM

60×60cm/24"× 24"


20 faces

60×30cm/24"× 12"

40 faces

30×30cm/12"× 12"

80 faces



V2

- ☒

Matt
- ☒


Lappato

TECHNICAL SPECIFICATIONS


TECHNICAL CHARACTERISTIC	STANDARD TEST METHOD	ISO STANDARD REQUIREMENT	OUR VALUES
Length & Width	ISO 10545-2	±0.6%MAX	±0.30%Max
Thickness	ISO 10545-2	±5.0%MAX	±5.0%Max
Sides Straightness	ISO 10545-2	±5%MAX	±0.25%Max
Rectangularity	ISO 10545-2	±0.5%MAX	±0.25%Max
Flatness : a) Centre Curvature	ISO 10545-2	±0.5%MAX	±0.20%Max/Max2.0mm
b) Edge Curvature	ISO 10545-2	±0.5%MAX	±0.20%Max/Max2.0mm
c) Warpage	ISO 10545-2	±0.5%MAX	±0.20%Max/Max2.0mm
Surface Quality	ISO 10545-2	≥95%FREE From visible defect	Comply
Water Absorption	ISO 10545-3	≤0.5%	≤0.20%
Breaking Strength	ISO 10545-4	≥1300N	≥1300N
Modulus Of Rupture	ISO 10545-4	≥35N/mm ² Individual ≥32N/mm²	≥35N/mm ² Individual ≥32N/mm²
Abrasion Resistance			
a) Deep Abrasion For Unglazed Tiles	ISO 10545-6	≤175mm ³	≤160mm ³
b) Surfaces Abrasion For Glazed Tiles	ISO 10545-7	Manuf.to state abrasion class, cycle and passed	≥PEI 3 (Dependent On Product Type)
Crazing Test (glazed Tiles)	ISO 10545-11	No Sign Of Crazing	No Sign Of Crazing
Frost Resistance	ISO 10545-12	Required	No Visible Crack
Chemical Resistance			
a) low concentrations	ISO 10545-13	Manuf. to state	Class A
b) household chemicals and Swimming pool salts	ISO 10545-13	≥class B	Class B(For Polished Tiles) Class A Class B(For Polished Tiles)
Stain Resistance			
a) for unglazed tiles	ISO 10545-14	Manuf. to state	≥Class 3
b) for glazed tiles	ISO 10545-14	≥class 3	≥Class 3
Slip Resistance (Excluding Polished,Lappato And Satin Finishing)	AS/NZS 4586 App.A	Manuf. to state	Wet Pendulum≥P4 (Dependent On Product Type)

PACKING SPECIFICATIONS


SERIES	SIZES	PCS/CTN	m ² /CTN	KG/CTN	m ² /PLT	KG/PLT	CTN/PLT
BALI	60x120/24”x48”	2	1.44	32	80.64	1792	56
	60x60/24”x24”	4	1.44	30	57.60	1200	40
	30x60/12”x24”	8	1.44	30	57.60	1200	40
	30x30/12”x12”	11	0.99	21	55.44	1176	56




UNIFORM
VARIATION
V1



SLIGHT
VARIATION
V2



MODERATE
VARIATION
V3



SUBSTANTIAL
VARIATION
V4



Foshan Casagres International Co, Ltd.
info@casagresintl.com
www.casagresintl.com