CEMIX



CASAGRES



CEMIX

Where Art Meets Functionality.

CEMIX redefines the essence of cement-style tiles with its exquisite matte finish, blending artistic depth with practicality to elevate any space.

In terms of artistry, each tile embodies a raw, understated elegance—replicating the authentic texture of poured concrete with subtle variations in tone and grain that mimic the organic beauty of handcrafted cement.

When it comes to applications, CEMIX's versatility shines across residential and commercial settings.

Ideal for flooring in living rooms, bedrooms, and kitchens, its non-slip matte surface ensures safety without compromising style.

CEMIX are also fully recyclable at the end of their lifecycle, aligning with sustainable building practices. For homeowners and designers alike, CEMIX proves that style and environmental responsibility can coexist seamlessly.

CASAGRES

CEMIX


| Matt |

4 COLOURS



CHALK MIST DUST SMOKE

4 SIZES

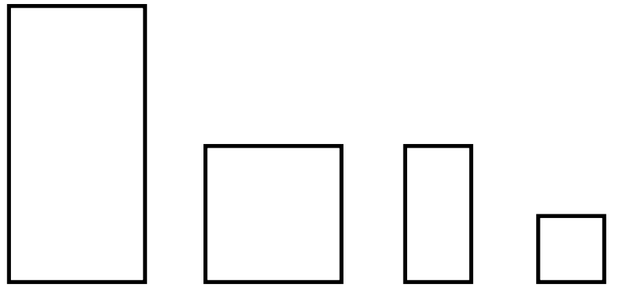

120×60cm
48''× 24''

60×60cm
24''× 24''

60×30cm
24''× 12''

30×30cm
12''× 12''

10mm
120×60cm 48''× 24''

9mm
60×60cm 24''× 24''
60×30cm 24''× 12''
30×30cm 12''× 12''




PHAIDON







CEMIX CHALK

10MM

120×60cm / 48''× 24''
8 faces

9MM

60×60cm/24''× 24''
16 faces

60×30cm/24''× 12''
32 faces

30×30cm/12''× 12''
64 faces

V2

Matt



CEMIX MIST

10MM

120×60cm / 48''× 24''
8 faces

9MM

60×60cm/24''× 24''
16 faces

60×30cm/24''× 12''
32 faces

30×30cm/12''× 12''
64 faces

V2

Matt





CEMIX DUST

10MM

120×60cm / 48''× 24''
8 faces

9MM

60×60cm/24''× 24''
16 faces

60×30cm/24''× 12''
32 faces

30×30cm/12''× 12''
64 faces

V2

Matt





CEMIX SMOKE

10MM

120×60cm / 48''× 24''
8 faces

9MM

60×60cm/24''× 24''
16 faces

60×30cm/24''× 12''
32 faces

30×30cm/12''× 12''
64 faces

V2

Matt





TECHNICAL SPECIFICATIONS

TECHNICAL CHARACTERISTIC	STANDARD TEST METHOD	ISO STANDARD REQUIREMENT	OUR VALUES
Length & Width	ISO 10545-2	±0.6%Max	±0.3%Max
Thickness	ISO 10545-2	±5.0%Max	±5.0%Max
Sides Straightness	ISO 10545-2	±5.0%Max	±0.25%Max
Rectangularity	ISO 10545-2	±0.5%Max	±0.25%Max
Flatness: a) Centre Curvature b) Edge Curvature c) Warpage	ISO 10545-2 ISO 10545-2 ISO 10545-2	±0.5%Max ±0.5%Max ±0.5%Max	±0.2%Max/Max2.0mm ±0.2%Max/Max2.0mm ±0.2%Max/Max2.0mm
Surface Quality	ISO 10545-2	≥ 95%FREE From visible defect	Comply
Water Absorption	ISO 10545-3	≤ 0.5%	≤ 0.20%
Breaking Strength	ISO 10545-4	≥ 1300N	≥ 1300N
Modulus Of Rupture	ISO 10545-4	≥ 35N/mm² Individual ≥ 32N/mm²	≥ 35N/mm² Individual ≥ 32N/mm²
Abrasion Resistance a) Deep Abrasion For Unglazed Tiles b) Surfaces Abrasion For Glazed Tiles	ISO 10545-6 ISO 10545-7	≤ 175mm³ Manuf.to state abrasion class,cycie and passed	≤ 160mm³ ≥ PEI 3 (Dependent On Product Type)
Crazing Test (glazed Tiles)	ISO 10545-11	No Sign Of Crazing	No Sign Of Crazing
Frost Resistance	ISO 10545-12	Required	No Visible Crack
Chemical Resistance a) low concentrations b) household chemicais and Swimming pool salts	ISO 10545-13 ISO 10545-13	Manuf. to state ≥ class B	Class A Class B(For Polished Tiles) Class A Class B(For Polished Tiles)
Stain Resistance a) for unglazed tiles b) for glazed tiles	ISO 10545-14 ISO 10545-14	Manuf. to state ≥ class 3	≥ Class 3 ≥ Class 3
Slip Resistance (Excluding Polished, Lappato And Satin Finishing)	AS/NZS 4586 App.A	Manuf. to state	Wet Pendulum ≥ P4 (Dependent On Product Type)

PACKING SPECIFICATIONS

SERIES	SIZES	PCS/CTN	m²/CTN	KG/CTN	m²/PLT	KG/PLT	CTN/PLT
ALL SERIES	60x120 / 24"x48"	2	1.44	32	97.92	2176	68
	60x60 / 24"x24"	4	1.44	30	57.60	1200	40
	30x60 / 12"x24"	8	1.44	30	57.60	1200	40
	30x30 / 12"x12"	16	1.44	30	57.60	1200	40


UNIFORM VARIATION
V1


SLIGHT VARIATION
V2


MODERATE VARIATION
V3


SUBSTANTIAL VARIATION
V4

CASAGRES

SINGAPORE GREEN BUILDING PRODUCT SGBC
LEADER

Foshan Casagres International Co, Ltd.
info@casagresintl.com
www.casagresintl.com