
SAVANA





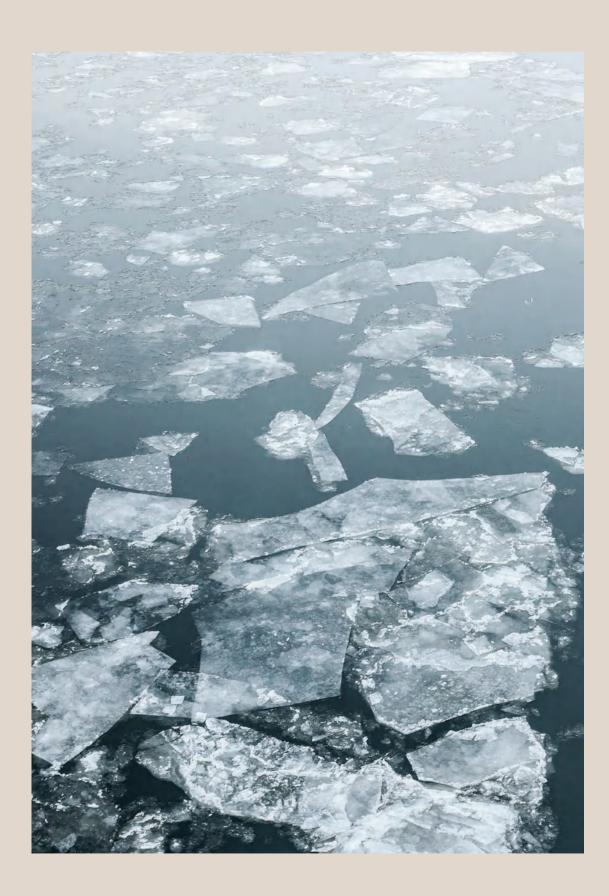

SAVANA

Where Art Meets Nature.

Inspired by the raw elegance of natural stone and the timeless beauty of artistic craftsmanship, the SAVANA series redefines modern interiors with its harmonious blend of organic textures and refined aesthetics. Each tile captures the essence of weathered stone surfaces, showcasing intricate veining, subtle tonal variations, and tactile depth that mirror nature's artistry.

Drawing from geological formations, the collection features a palette of neutral hues—soft greys, earthy beiges, and muted taupes—that evoke the serene landscapes of untouched wilderness. Advanced texture replication technology ensures every piece retains the authentic character of natural stone, while offering the durability and low-maintenance benefits of premium ceramic.

Perfect for both residential and commercial spaces, SAVANA transforms floors and walls into canvases of understated luxury. Its versatile application pairs seamlessly with minimalist designs or rustic-chic interiors, bridging the gap between organic authenticity and contemporary sophistication.

Embrace the spirit of nature, elevated by human artistry—SAVANA are more than surfaces; they're a celebration of timeless beauty.





SAVANA

Matt | Lappato |

4 COLOURS










WHITE

SAND

DARK

4 SIZES

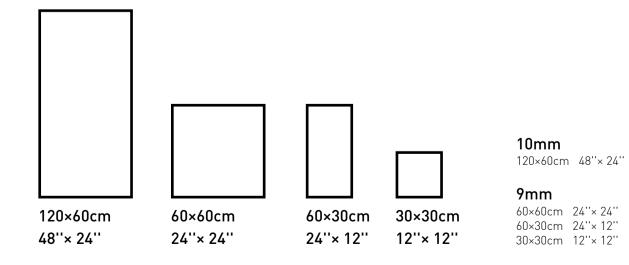












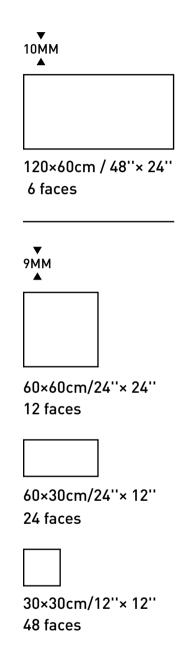












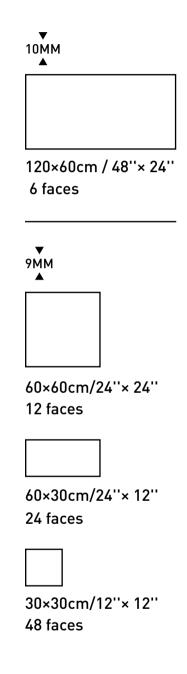










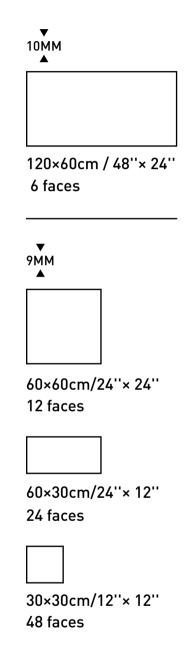












™ Lappato

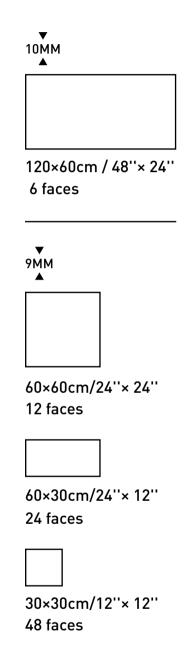

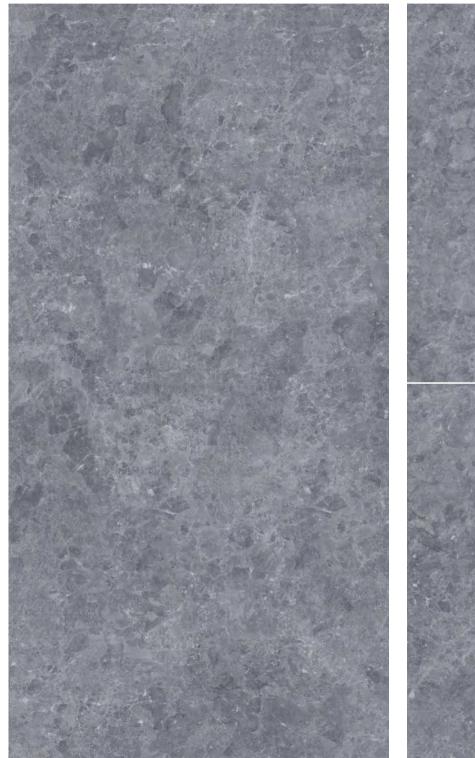

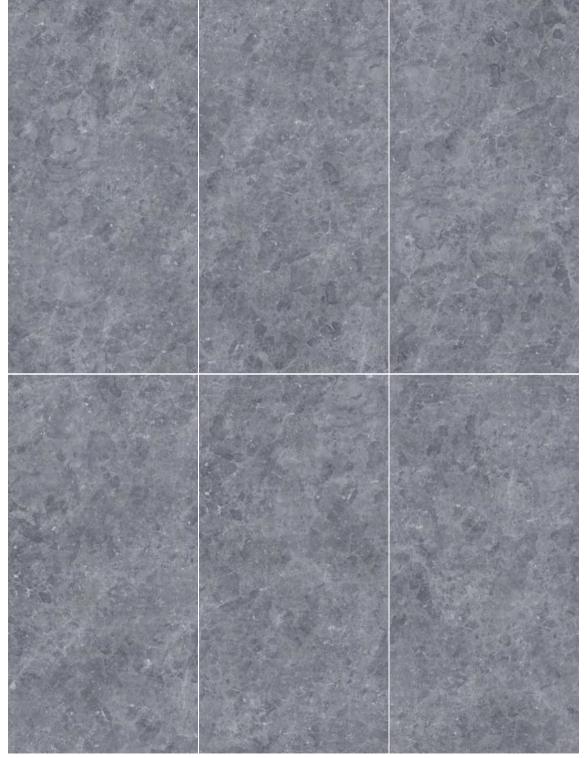





™ Lappato

TECHNICAL SPECIFICATIONS

TECHNICAL CHARACTERISTIC	STANDARD TEST METHOD	ISO STANDARD REQUIREMENT	OUR VALUES	
Length & Width	ISO 10545-2	±0.6%MAX	±0.30%Max	
Thickness	ISO 10545-2	±5.0%MAX	±5.0%Max	
Sides Straightness	ISO 10545-2	±5%MAX	±0.25%Max	
Rectangularity	ISO 10545-2	±0.5%MAX	±0.25%Max	
Flatness : a) Centre Curvature	ISO 10545-2	±0.5%MAX	±0.20%Max/Max2.0mm	
b) Edge Curvature	ISO 10545-2	\pm 0.5%MAX	±0.20%Max/Max2.0mm	
c) Warpage	ISO 10545-2	\pm 0.5%MAX	±0.20%Max/Max2.0mm	
Surface Quality	ISO 10545-2	≥95%FREE From visible defect	Comply	
Water Absorption	ISO 10545-3	≤0.5%	≤0.20%	
Breaking Strength	ISO 10545-4	≥1300N	≥1300N	
Modulus Of Rupture	ISO 10545-4	≥35N/mm² Individual ≥32N/mm²	≥35N/mm² Individual ≥32N/mm²	
Abrasion Resistance a) Deep Abrasion For Unglazed Tiles b) Surfaces Abrasion For Glazed Tiles	ISO 10545-6 ISO 10545-7	≤175mm³ Manuf.to state abrasion class, cycie and passed	≤160mm³ ≥PEI 3 (Dependent On Product Type)	
Crazing Test (glazed Tiles)	ISO 10545-11	No Sign Of Crazing	No Sign Of Crazing	
Frost Resistance	ISO 10545-12	Required	No Visible Crack	
Chemical Resistance a) low concentrations b) household chemicais and Swimming pool salts	ISO 10545-13 ISO 10545-13	Manuf. to state ≥class B	Class A Class B(For Polished Tiles) Class A Class B(For Polished Tiles)	
Stain Resistance a) for unglazed tiles b) for glazed tiles	ISO 10545-14 ISO 10545-14	Manuf. to state ≥class 3	≥Class 3 ≥Class 3	
Slip Resistance (Excluding Polished,Lappato And Satin Finishing)	AS/NZS 4586 App.A	Manuf. to state	Wet Pendulum≥P4 (Dependent On Product Type)	

PACKING SPECIFICATIONS


SERIES	SIZES	PCS/CTN	m²/CTN	KG/CTN	m²/PLT	KG/PLT	CTN/PLT
SAVANA	60x120/24"x48"	2	1.44	32	80.64	1792	56
	60x60/24"x24"	4	1.44	30	57.60	1200	40
	30x60/12"x24"	8	1.44	30	57.60	1200	40
	30x30/12"x12"	11	0.99	21	55.44	1176	56



UNIFORM VARIATION









SUBSTANTIAL VARIATION





Foshan Casagres International Co, Ltd. info@casagresintl.com www.casagresintl.com