
# TUNDRA





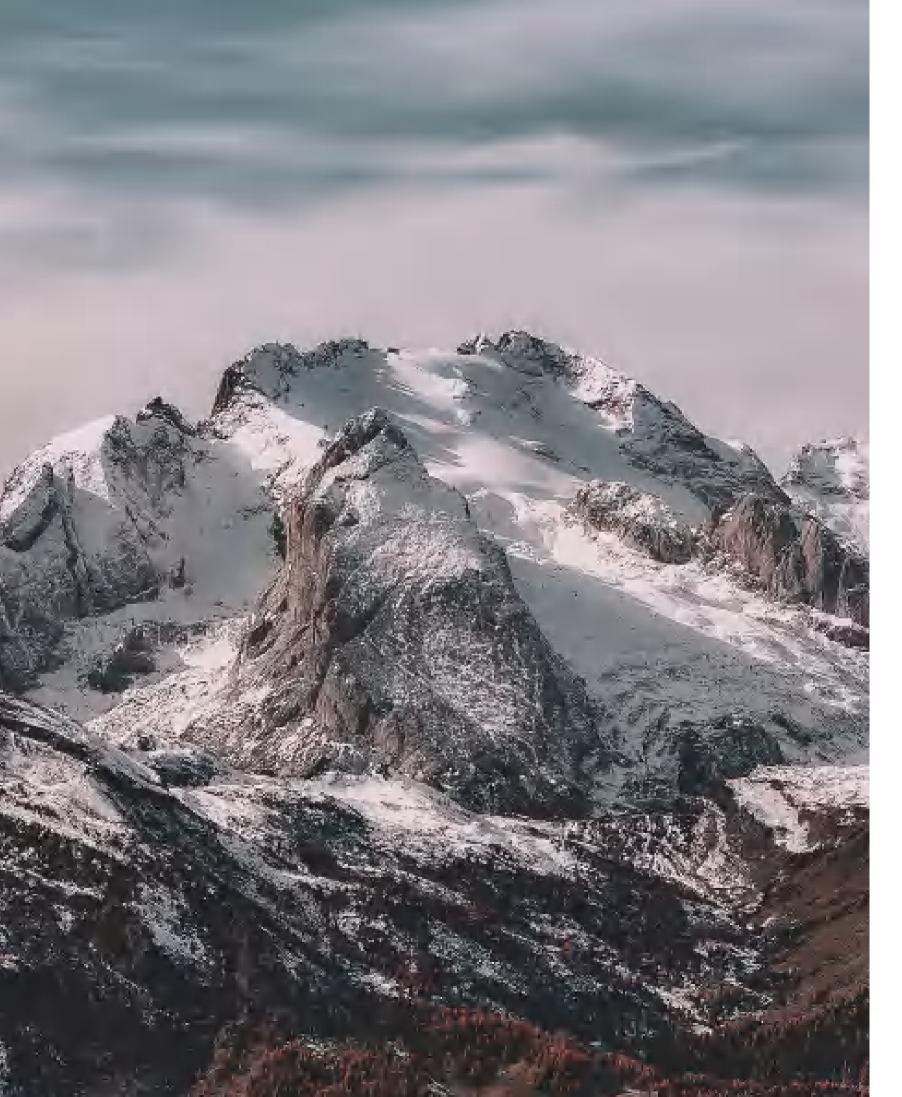

## **TUNDRA**

Inspired by the vast, serene landscapes of the tundra, TUNDRA bring the outdoors inside, creating a space that is both tranquil and invigorating.

TUNDRA are meticulously crafted to capture the subtle hues and textures found in the natural tundra environment. The palette ranges from soft, cool grays to earthy, warm browns, reflecting the changing seasons and moods of the tundra.

Each tile is a masterpiece in itself, featuring a unique blend of colors and patterns that mimic the organic, undulating surfaces found in nature.

They can be used in a multitude of settings, from residential bathrooms and kitchens to commercial spaces such as offices and retail stores. Their slip-resistant properties make them perfect for wet areas



## **TUNDRA**

Sliptech | Polished |

### 3 COLOURS







**BEIGE** 


LIGHT

**DARK** 

#### 5 SIZES

9mm

60×60cm 24"× 24" 60×30cm 24"× 12" 30×30cm 12"× 12"

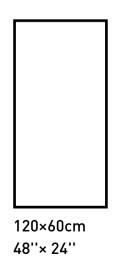



60×60cm


24''× 24''

10mm

120×60cm 48''× 24''









#### 20mm

60×40cm 24"× 16"



60×40cm 24''× 16''

#### 2 FINISHES



#### ▲ Polished

POLISHED lends elegance and style to floors and walls, allowing for enormous creativity in terms of installation patterns and colour combinations.

#### **▼** Sliptech

The soft-touch satin-finish surfaces are ideal for all interior applications as well as for new and surprising stylistic combinations.














• Wall / Floor . TUNDRA - LIGHT SLIPTECH 60X120cm - 48''× 24''







• Wall / Floor . TUNDRA - DARK SLIPTECH 60X120cm - 48''× 24''

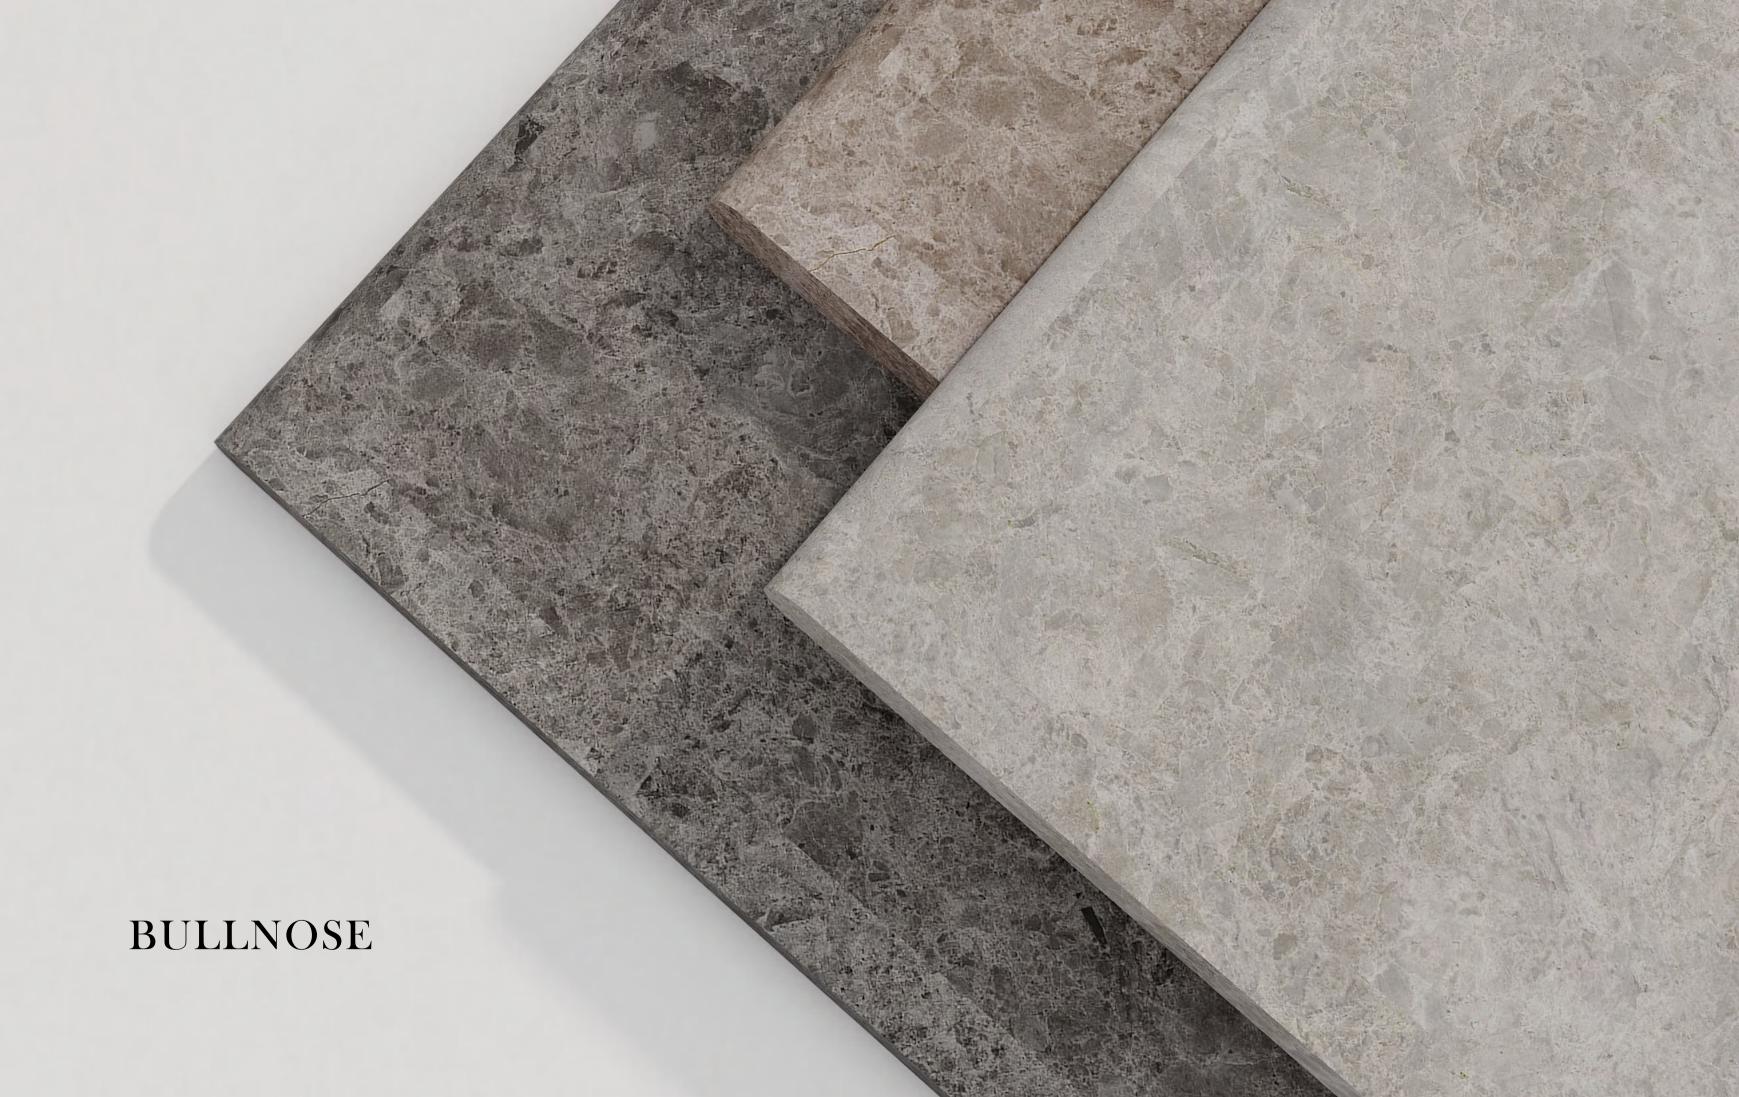






• TUNDRA - BULLNOSE






✓ Sliptech✓ Polished

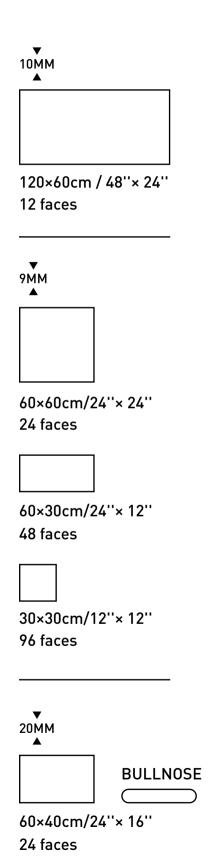






✓ Sliptech✓ Polished

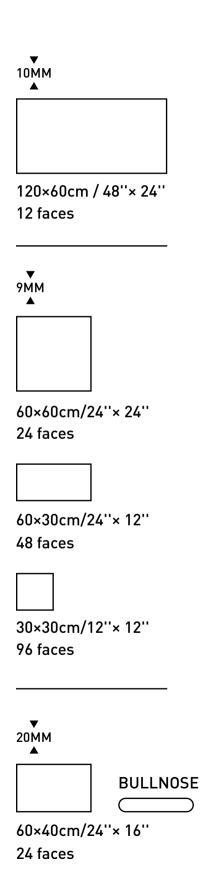






✓ Sliptech✓ Polished

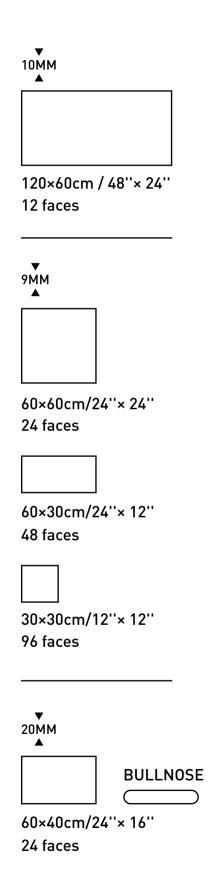

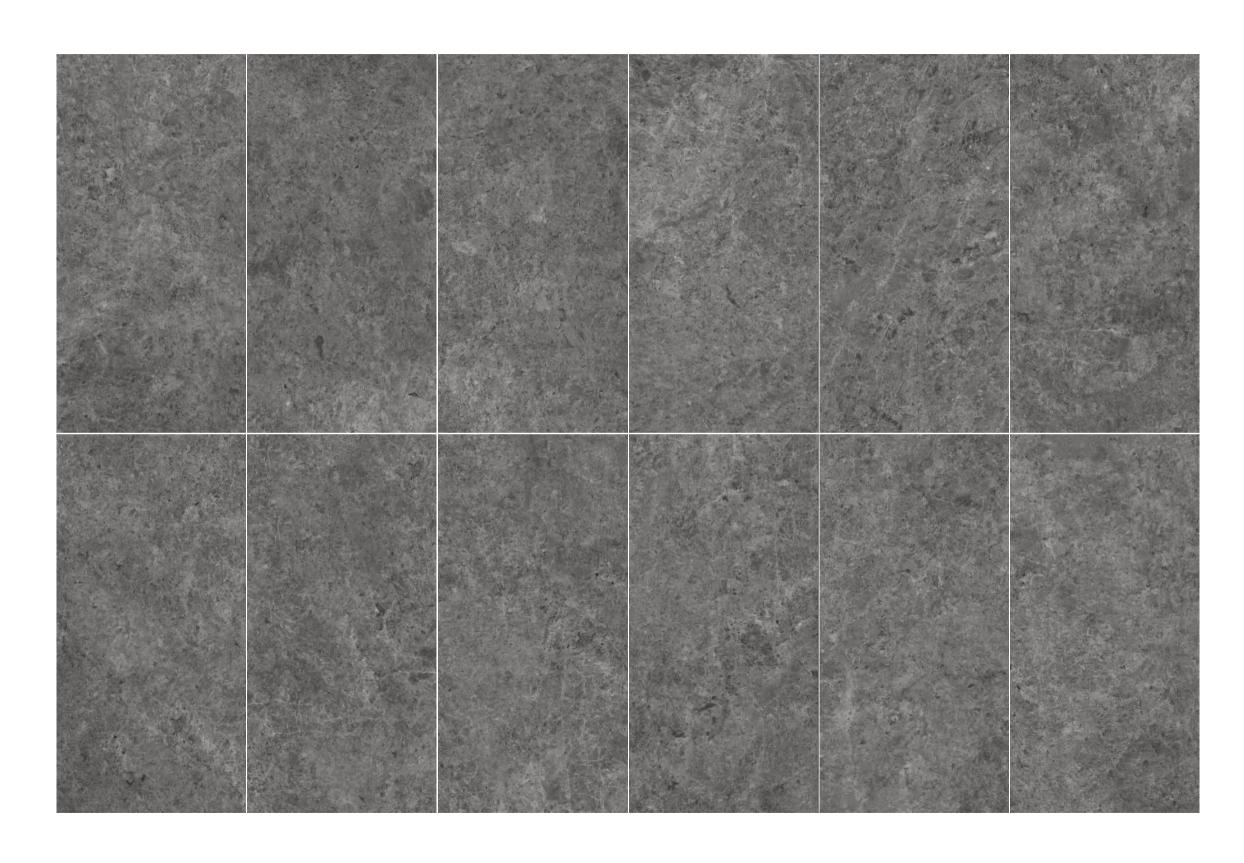

## **TECHNICAL SPECIFICATIONS**

TECHNICAL CHARACTERISTIC	STANDARD TEST METHOD	ISO STANDARD REQUIREMENT	OUR VALUES	
Length & Width	ISO 10545-2	±0.6%MAX	±0.30%Max	
Thickness	ISO 10545-2	±5.0%MAX	±5.0%Max	
Sides Straightness	ISO 10545-2	±5%MAX	±0.25%Max	
Rectangularity	ISO 10545-2	±0.5%MAX	±0.25%Max	
Flatness : a) Centre Curvature	ISO 10545-2	±0.5%MAX	±0.20%Max/Max2.0mm	
b) Edge Curvature	ISO 10545-2	$\pm$ 0.5%MAX	±0.20%Max/Max2.0mm	
c) Warpage	ISO 10545-2	$\pm$ 0.5%MAX	±0.20%Max/Max2.0mm	
Surface Quality	ISO 10545-2	≥95%FREE From visible defect	Comply	
Water Absorption	ISO 10545-3	≤0.5%	≤0.20%	
Breaking Strength	ISO 10545-4	≥1300N	≥1300N	
Modulus Of Rupture	ISO 10545-4	≥35N/mm² Individual ≥32N/mm²	≥35N/mm² Individual ≥32N/mm²	
Abrasion Resistance a) Deep Abrasion For Unglazed Tiles b) Surfaces Abrasion For Glazed Tiles	ISO 10545-6 ISO 10545-7	≤175mm³ Manuf.to state abrasion class, cycie and passed	≤160mm³ ≥PEI 3 (Dependent On Product Type)	
Crazing Test (glazed Tiles)	ISO 10545-11	No Sign Of Crazing	No Sign Of Crazing	
Frost Resistance	ISO 10545-12	Required	No Visible Crack	
Chemical Resistance a) low concentrations b) household chemicais and Swimming pool salts	ISO 10545-13 ISO 10545-13	Manuf. to state ≥class B	Class A Class B(For Polished Tiles) Class A Class B(For Polished Tiles)	
Stain Resistance a) for unglazed tiles b) for glazed tiles	ISO 10545-14 ISO 10545-14	Manuf. to state ≥class 3	≥Class 3 ≥Class 3	
Slip Resistance (Excluding Polished,Lappato And Satin Finishing)	AS/NZS 4586 App.A	Manuf. to state	Wet Pendulum≥P4 (Dependent On Product Type)	

## **PACKING SPECIFICATIONS**

SERIES	SIZES	PCS/CTN	m²/CTN	KG/CTN	m²/PLT	KG/PLT	CTN/PLT
TUNDRA	60x120/24"x48"	2	1.44	32	80.64	1792	56
	60x60/24"x24"	4	1.44	30	57.60	1200	40
	30x60/12"x24"	8	1.44	30	57.60	1200	40
	30x30/12"x12"	11	0.99	21	55.44	1176	56



UNIFORM VARIATION











SUBSTANTIAL VARIATION





Foshan Casagres International Co, Ltd. info@casagresintl.com www.casagresintl.com