

LITHOS





LITHOS

Raw Elegance, Redefined.

Embodying the untamed spirit of natural stone, LITHOS is a cutting-edge porcelain tile collection designed for those who appreciate understated luxury with an edge.

The surface features a distinctive sandy-grained texture—subtly tactile yet visually striking—reminiscent of wind-swept deserts and rugged quarry stones. It captures the essence of raw geological formations while maintaining a sleek, contemporary aesthetic.

Perfectly in tune with modern design trends, LITHOS blends effortlessly into minimalist lofts, boutique hotels, spa retreats, or high-end residential spaces. Whether used on floors, feature walls, or outdoor patios, its stone-like character adds warmth and authenticity without overwhelming the senses.

From industrial chic to coastal calm, LITHOS gives architects and homeowners the freedom to create spaces that feel both timeless and completely on-trend.



LITHOS

| Matt | Lappato |

The LITHOS collection stays true to its softly matt, low-sheen identity, offering 4 signature colors—each featuring multiple distinctive grain patterns across the surface for enriched visual depth.

Best of all, tile dimensions are fully customizable to suit any project requirement, from small mural accents to large-format floor slabs.




ALABASTER




CASHMERE



NICKEL



CARBON

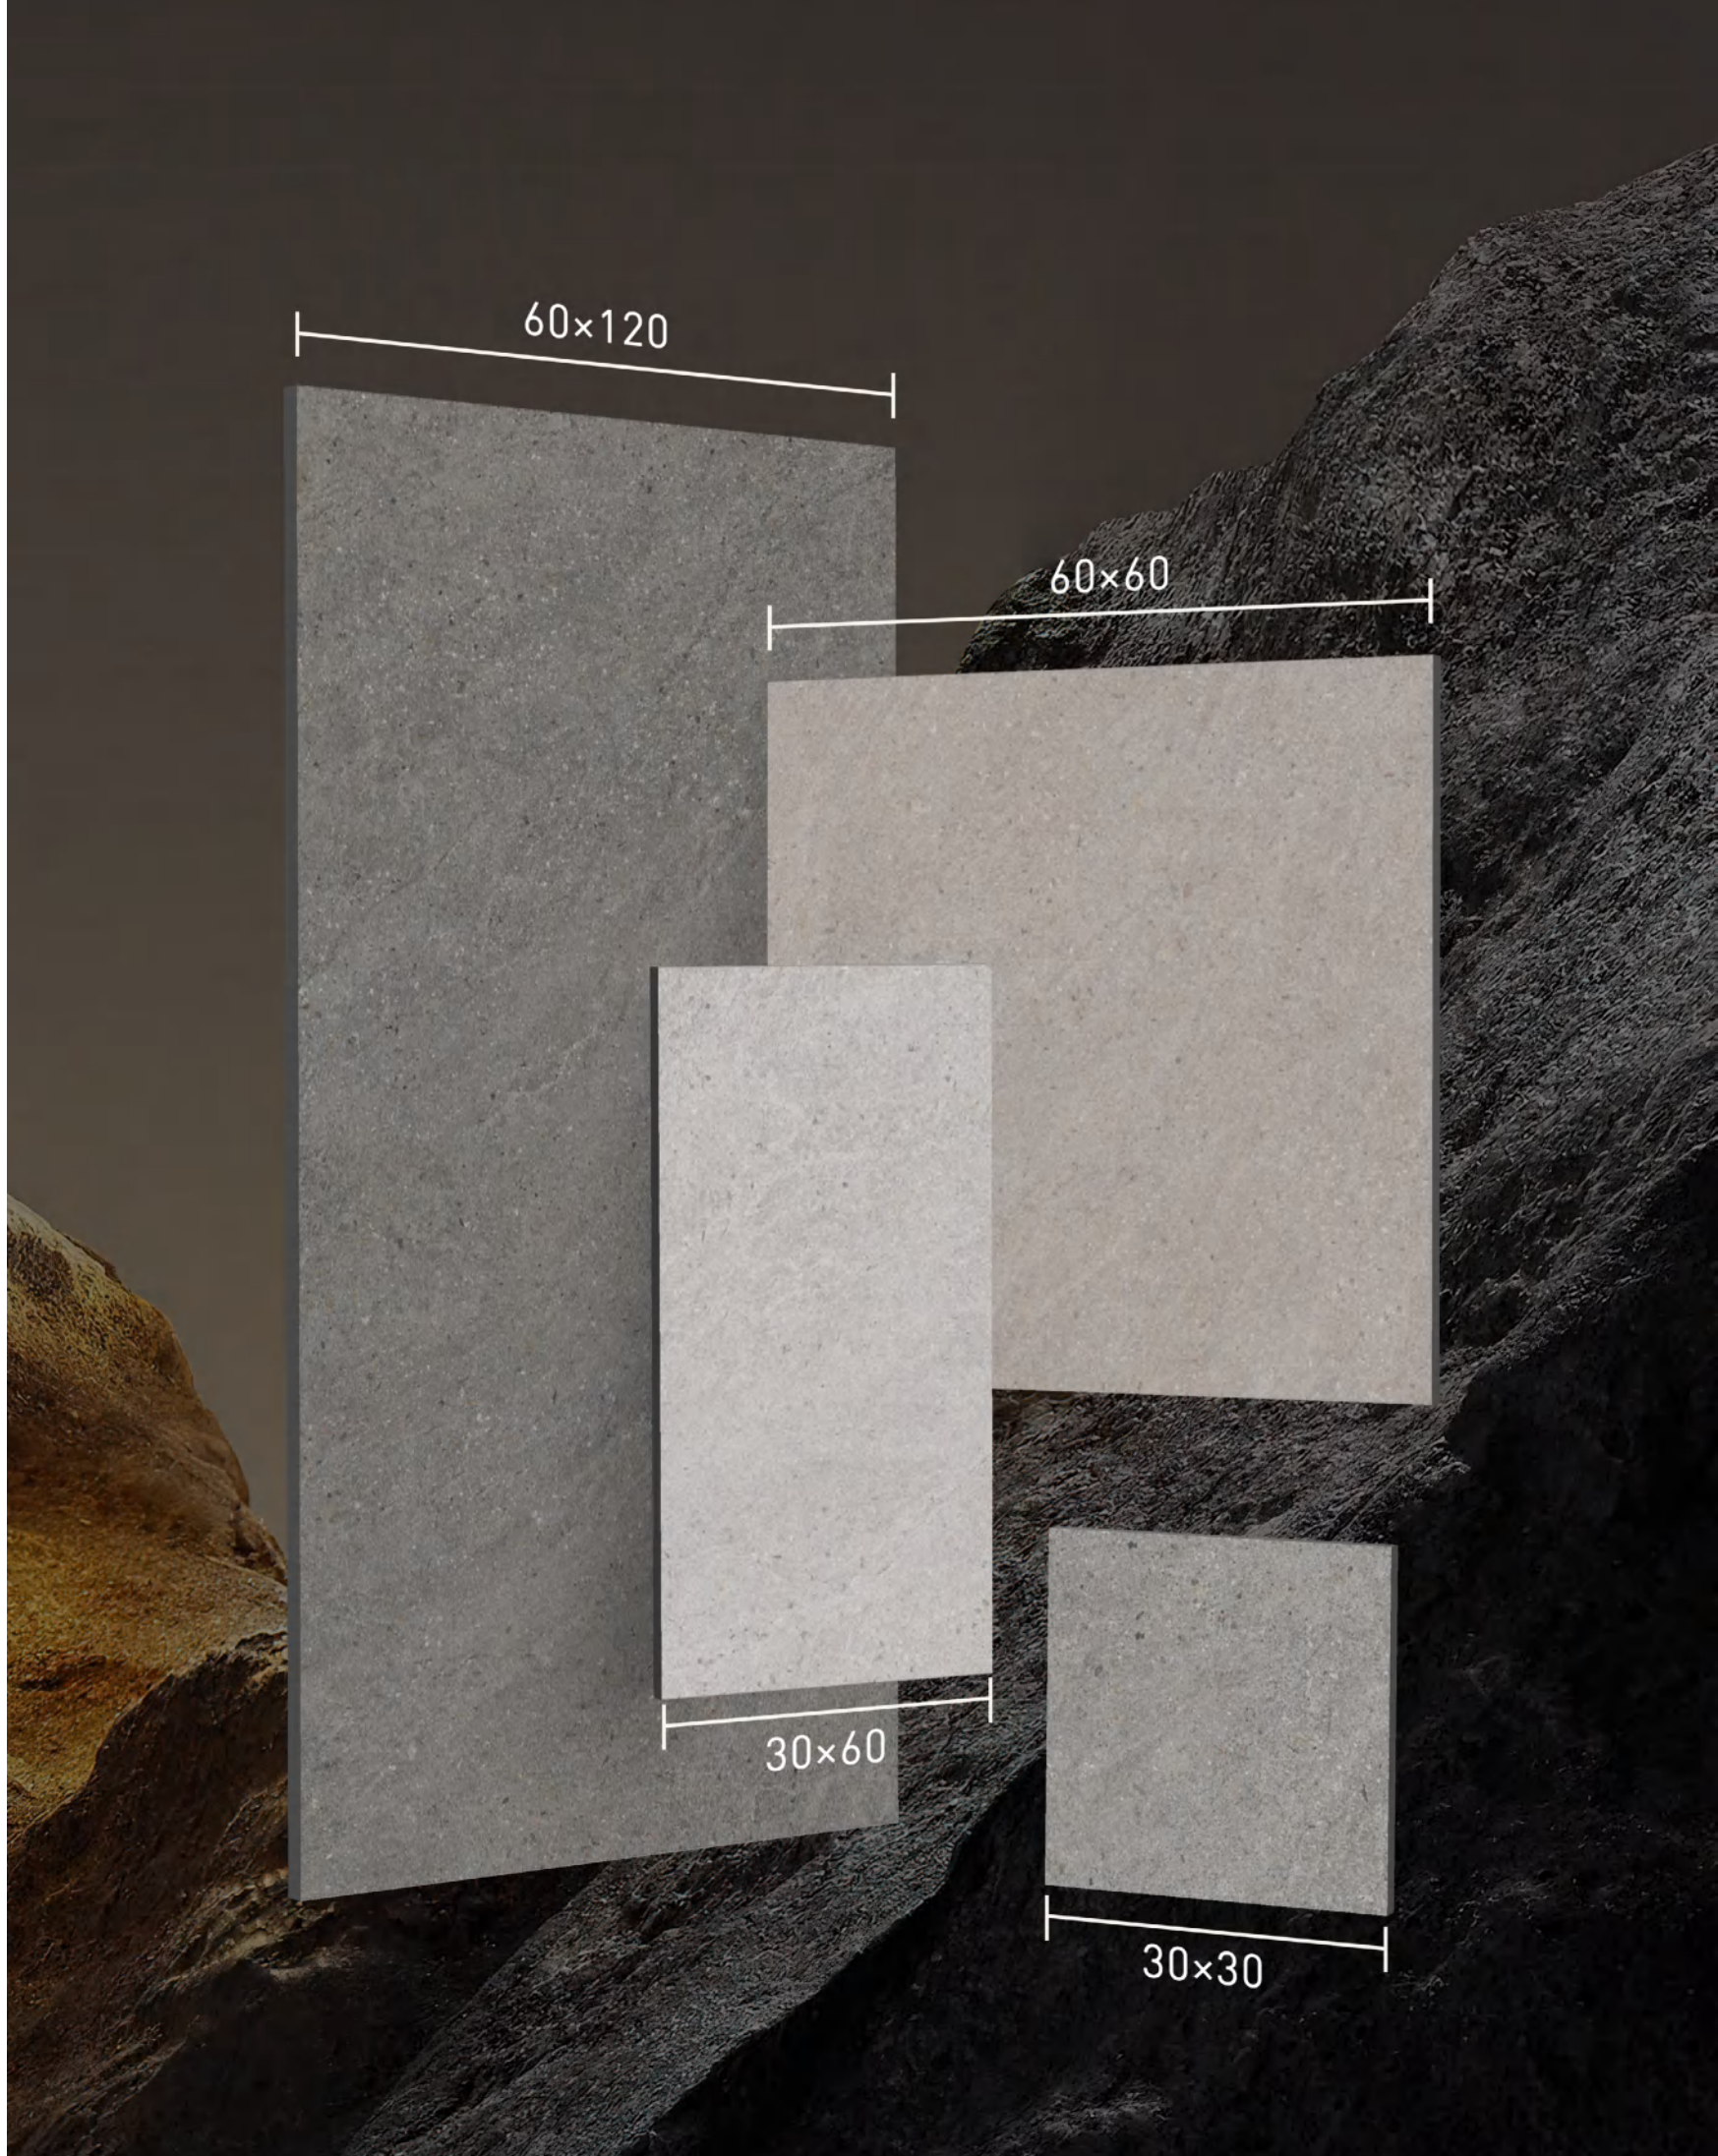



• Wall .
LITHOS - ALABASTER
MATT
60X60cm - 24" x 24"


• Floor .
LITHOS - NICKEL
MATT
60X60cm - 24" x 24"



• Floor .
LITHOS - CASHMERE
MATT
60X60cm - 24" x 24"



• Wall .
LITHOS - CASHMERE
MATT
60X60cm - 24" x 24"

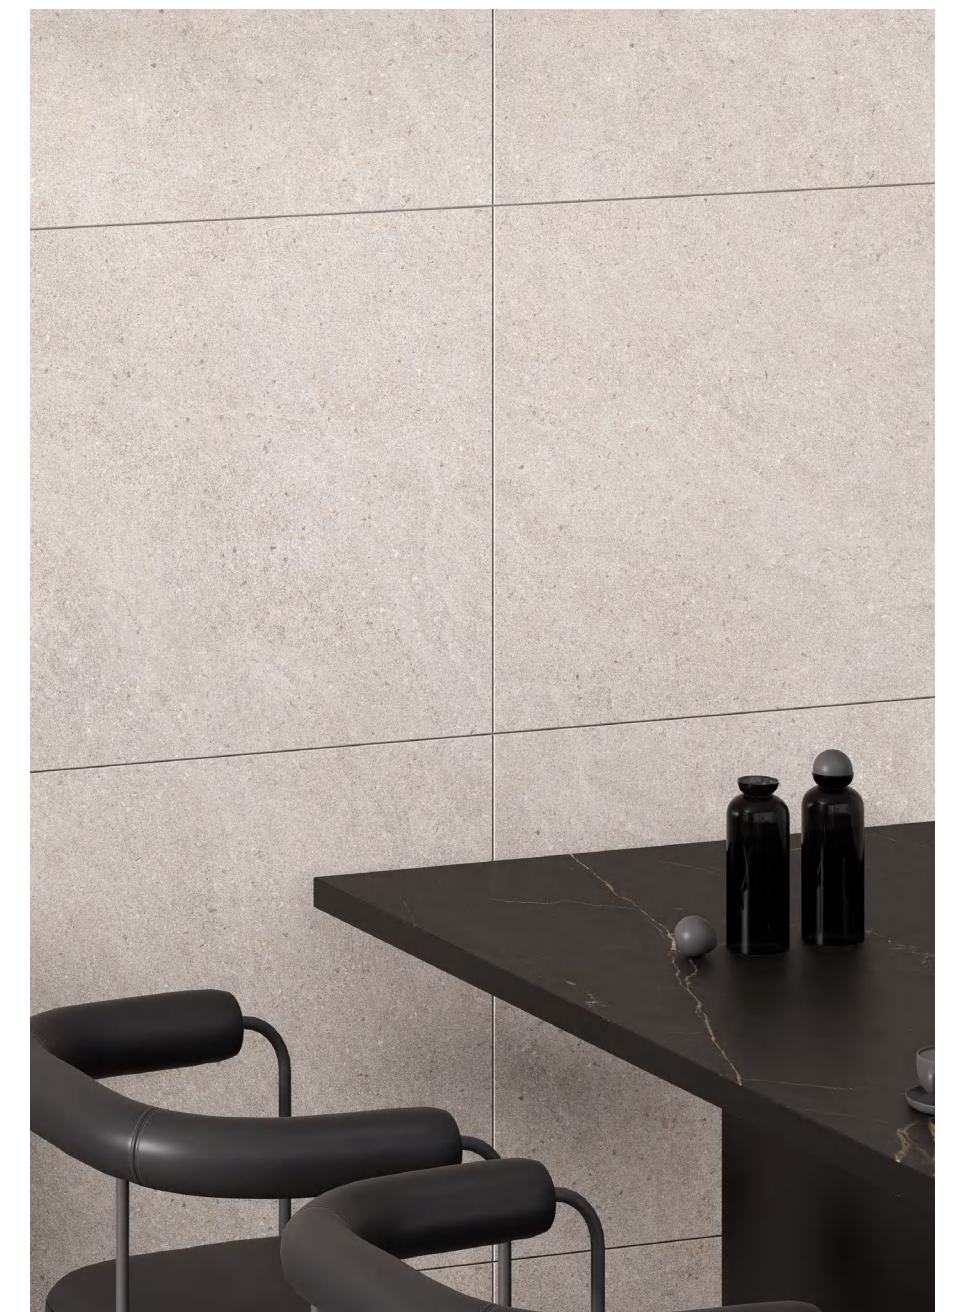


• Floor .
LITHOS - CARBON
MATT
60X60cm - 24" x 24"



LITHOS ALABASTER

PRODUCT INFORMATION

▼
10MM
▲




120x60cm / 48" x 24"
6 faces

▼
9MM
▲




60x60cm / 24" x 24"
12 faces



60x30cm / 24" x 12"
24 faces



30x30cm / 12" x 12"
48 faces

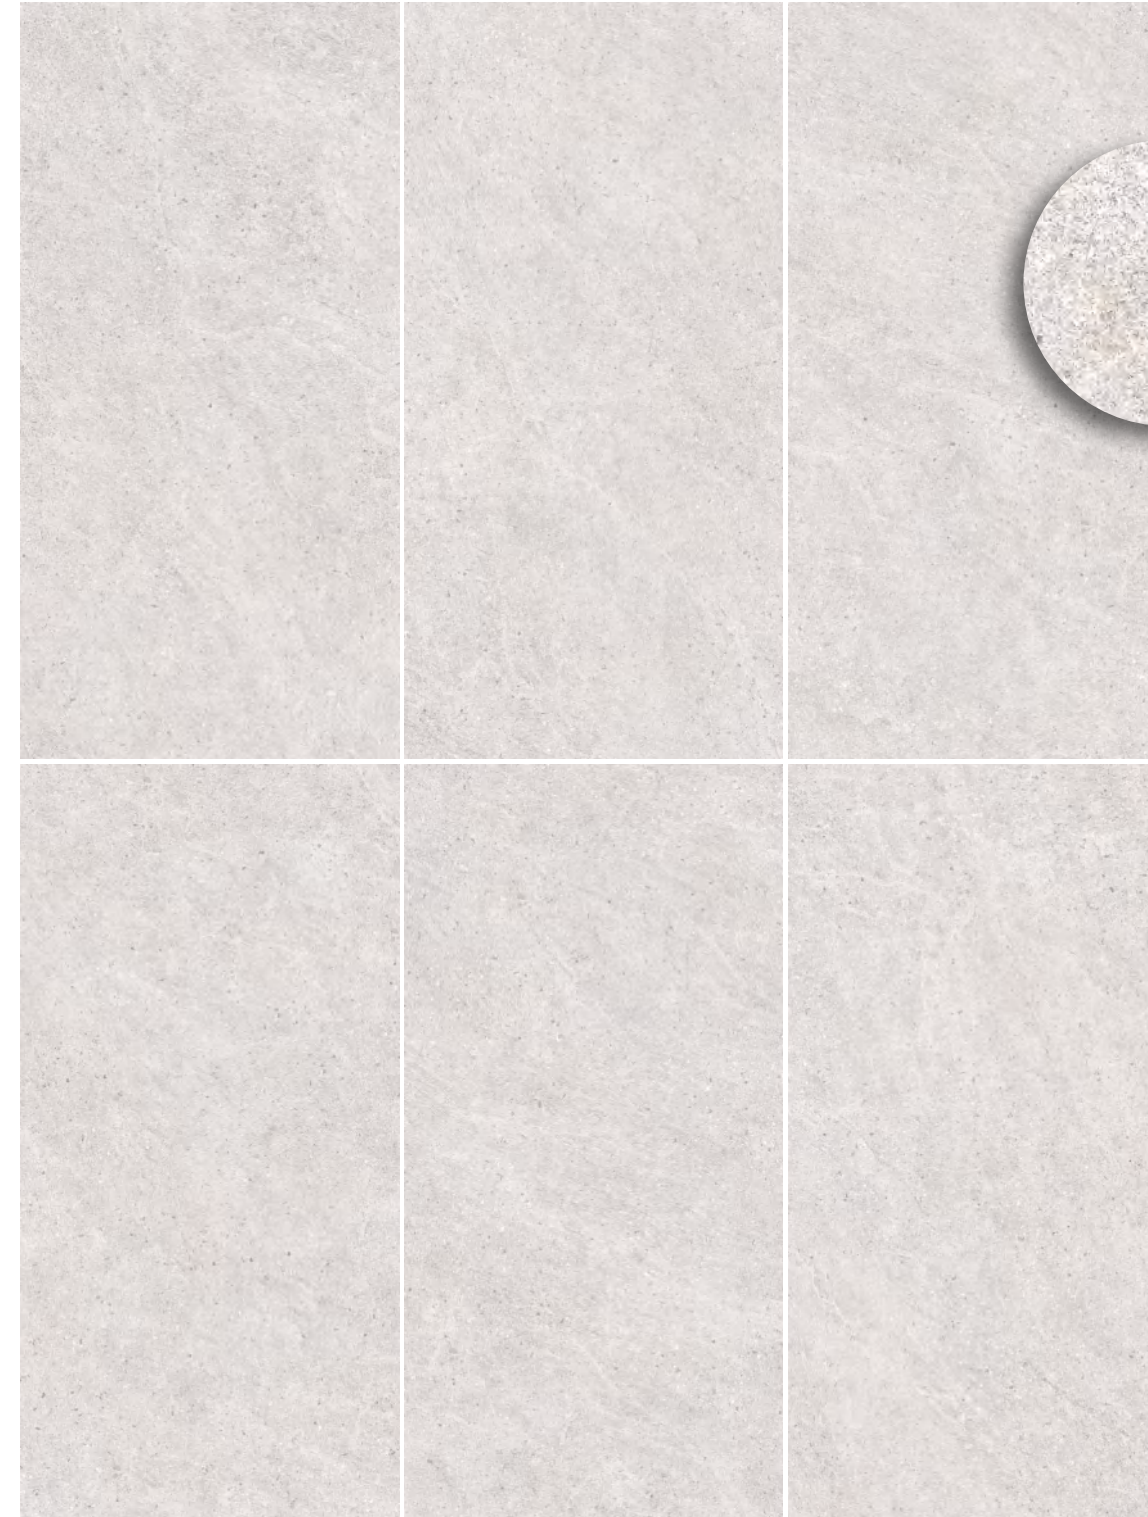

- Matt
- Lappato



V2

LITHOS CASHMERE

PRODUCT INFORMATION

▼
10MM
▲




120x60cm / 48" x 24"
6 faces

▼
9MM
▲




60x60cm / 24" x 24"
12 faces



60x30cm / 24" x 12"
24 faces



30x30cm / 12" x 12"
48 faces

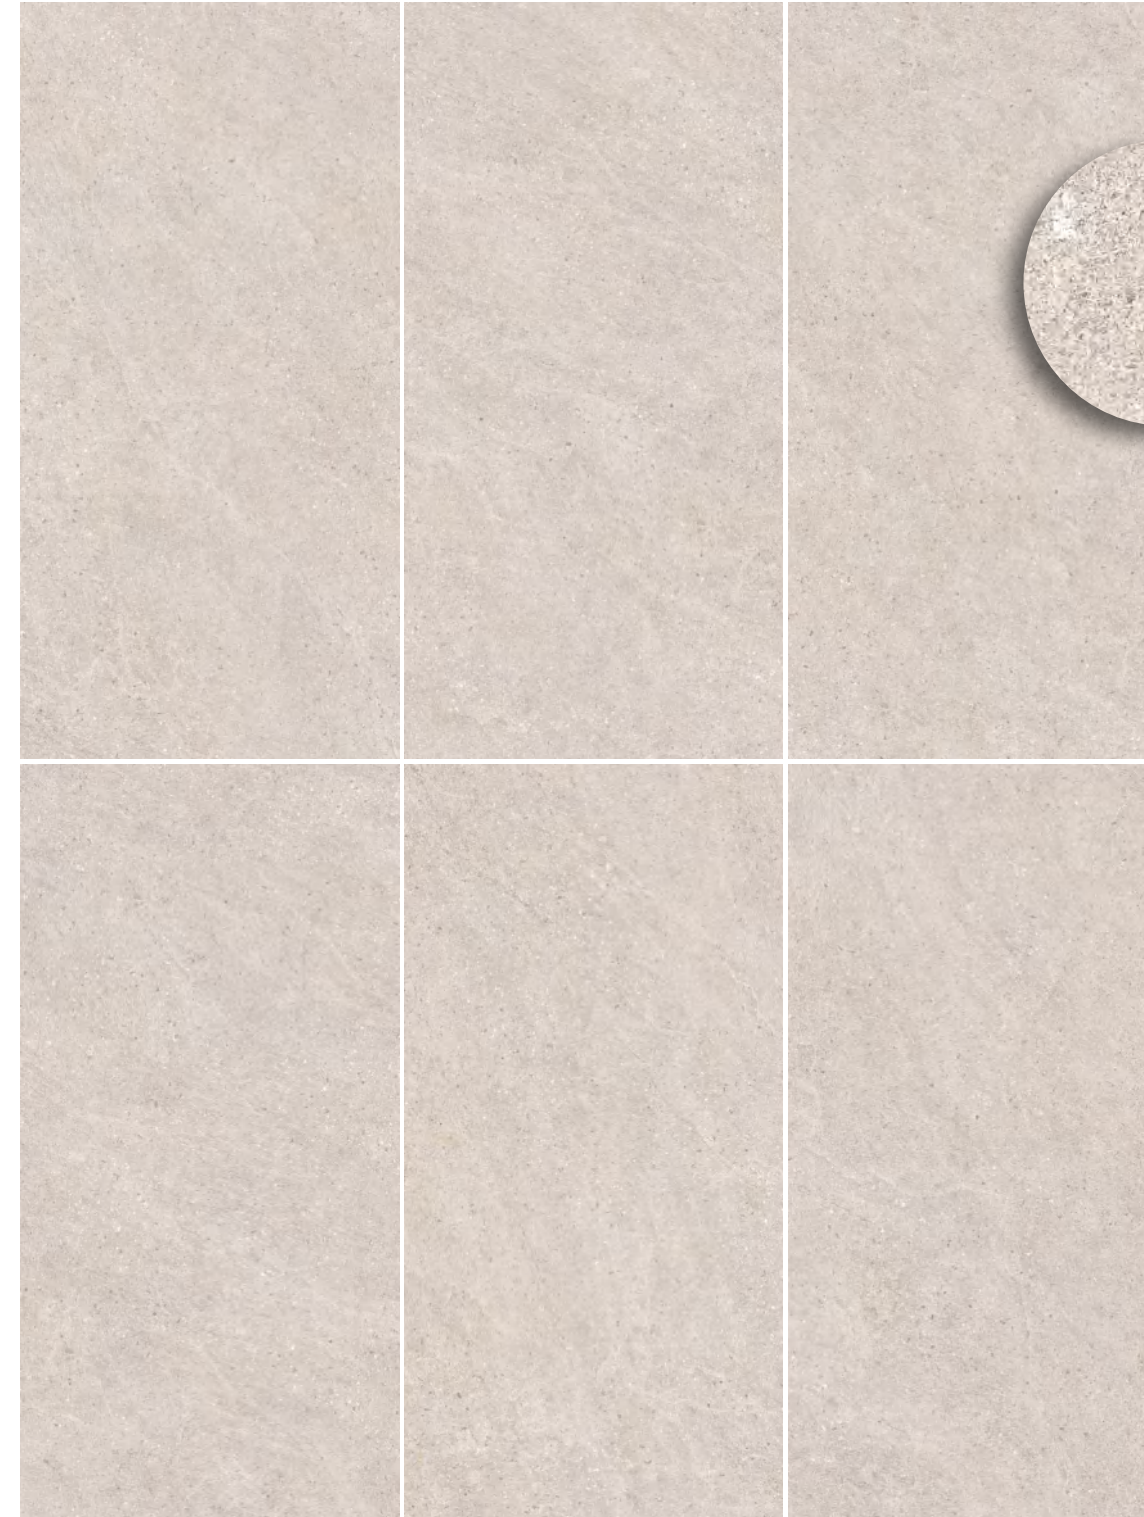

- Matt
- Lappato



V2

LITHOS NICKEL

PRODUCT INFORMATION

▼
10MM
▲




120x60cm / 48" x 24"
6 faces

▼
9MM
▲




60x60cm / 24" x 24"
12 faces



60x30cm / 24" x 12"
24 faces



30x30cm / 12" x 12"
48 faces

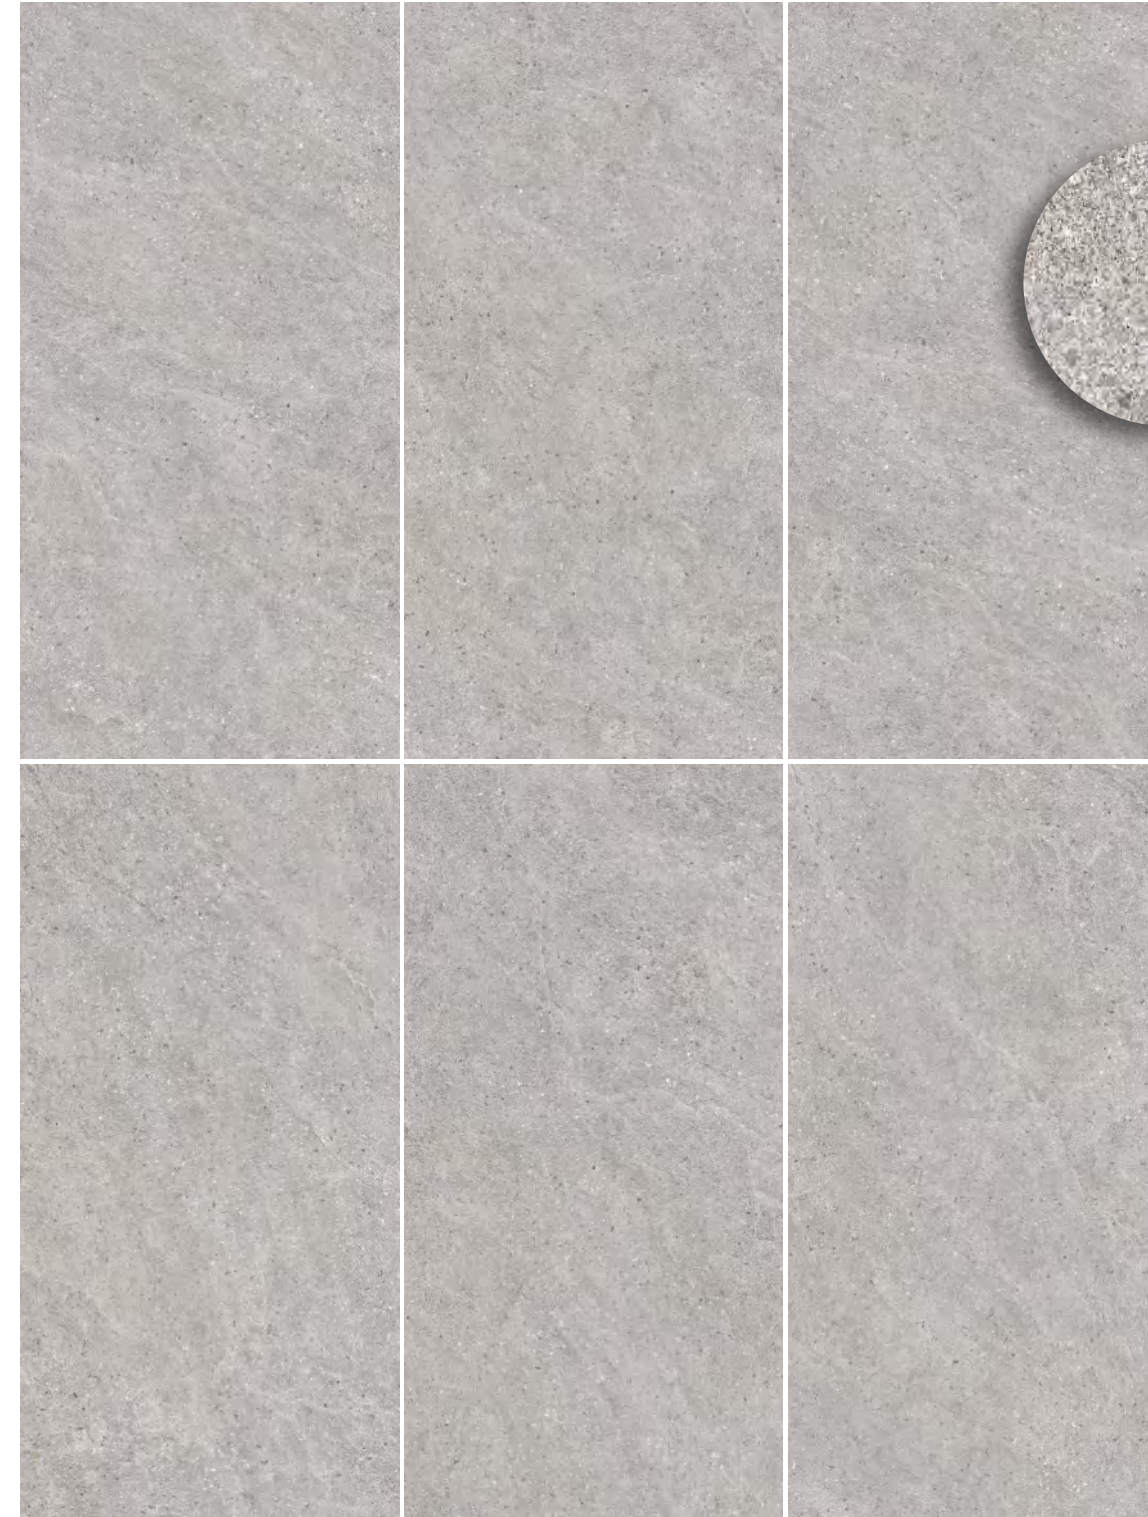

- Matt
- Lappato



V2

LITHOS CARBON

PRODUCT INFORMATION

▼
10MM
▲




120x60cm / 48" x 24"
6 faces

▼
9MM
▲




60x60cm / 24" x 24"
12 faces



60x30cm / 24" x 12"
24 faces



30x30cm / 12" x 12"
48 faces

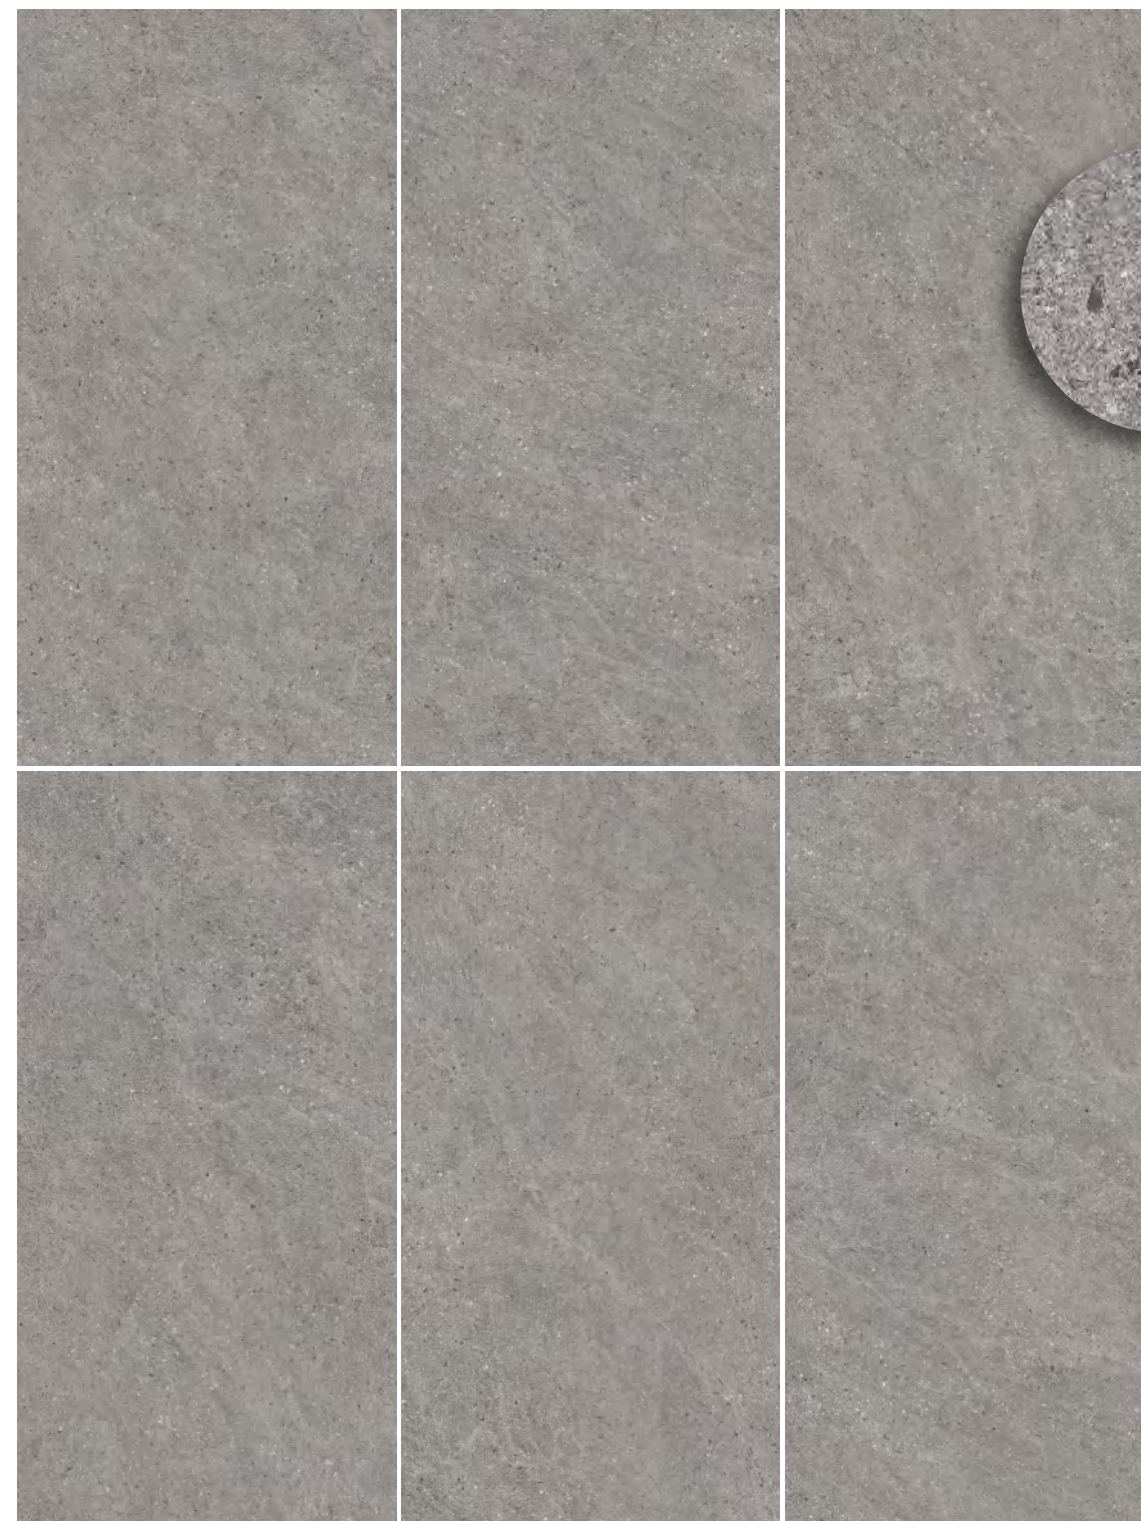

- Matt
- Lappato



V2




TECHNICAL SPECIFICATIONS

TECHNICAL CHARACTERISTIC	STANDARD TEST METHOD	ISO STANDARD REQUIREMENT	OUR VALUES
Length & Width	ISO 10545-2	±0.6%Max	±0.3%Max
Thickness	ISO 10545-2	±5.0%Max	±5.0%Max
Sides Straightness	ISO 10545-2	±5.0%Max	±0.25%Max
Rectangularity	ISO 10545-2	±0.5%Max	±0.25%Max
Flatness: a) Centre Curvature b) Edge Curvature c) Warpage	ISO 10545-2 ISO 10545-2 ISO 10545-2	±0.5%Max ±0.5%Max ±0.5%Max	±0.2%Max/Max2.0mm ±0.2%Max/Max2.0mm ±0.2%Max/Max2.0mm
Surface Quality	ISO 10545-2	≥ 95%FREE From visible defect	Comply
Water Absorption	ISO 10545-3	≤ 0.5%	≤ 0.20%
Breaking Strength	ISO 10545-4	≥ 1300N	≥ 1300N
Modulus Of Rupture	ISO 10545-4	≥ 35N/mm ² Individual ≥ 32N/mm ²	≥ 35N/mm ² Individual ≥ 32N/mm ²
Abrasion Resistance a) Deep Abrasion For Unglazed Tiles b) Surfaces Abrasion For Glazed Tiles	ISO 10545-6 ISO 10545-7	≤ 175mm ³ Manuf.to state abrasion class,cycie and passed	≤ 160mm ³ ≥ PEI 3 (Dependent On Product Type)
Crazing Test (glazed Tiles)	ISO 10545-11	No Sign Of Crazing	No Sign Of Crazing
Frost Resistance	ISO 10545-12	Required	No Visible Crack
Chemical Resistance a) low concentrations b) household chemicals and Swimming pool salts	ISO 10545-13 ISO 10545-13	Manuf. to state ≥ class B	Class A Class B(For Polished Tiles) Class A Class B(For Polished Tiles)
Stain Resistance a) for unglazed tiles b) for glazed tiles	ISO 10545-14 ISO 10545-14	Manuf. to state ≥ class 3	≥ Class 3 ≥ Class 3
Slip Resistance (Excluding Polished, Lappato And Satin Finishing)	AS/NZS 4586 App.A	Manuf. to state	Wet Pendulum ≥ P4 (Dependent On Product Type)



PACKING SPECIFICATIONS

SERIES	SIZES	PCS/CTN	m ² /CTN	KG/CTN	m ² /PLT	KG/PLT	CTN/PLT
LITHOS	60x120 / 24"x48"	2	1.44	32	97.92	2176	68
	60x60 / 24"x24"	4	1.44	30	57.60	1200	40
	30x60 / 12"x24"	8	1.44	30	57.60	1200	40
	30x30 / 12"x12"	16	1.44	30	57.60	1200	40



Foshan Casagres International Co, Ltd.
info@casagresintl.com
www.casagresintl.com